




Technology

- Superior seal technology ensuring odour free performance
- Absolute flexibility for easy and quick installation
- Horizontal or vertical installation
- No risk of de-siphoning
- Integrated ventilation of pipes

Technical Data

TECHNICAL CHARACTERISTICS	
WATER SEAL	0 mm. Odours blocked by obturation using a silicone membrane
MATERIALS	BODY: Thermoplastic elastomer
	MEMBRANE: Silicone
ENDURANCE	<ul style="list-style-type: none"> • Watertight after 1000 hrs of ageing at 60°C <ul style="list-style-type: none"> - Resists 300,000 water passage cycles - Watertight in 1m of cold water (15°C) - Watertight in 1m of warm water (95°C) - Chemical resistance : no deterioration of the trap when tested with various commercial cleaning products.

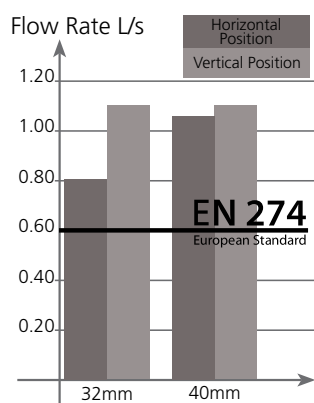

Flow rate in 120mm of water

- Horizontal position

For connection to $\varnothing 42$ mm PVC tubes

For connection to $\varnothing 32$ mm PVC tubes

-Vertical position

