

TDI Firestop 0.25[®]

Insulated Cavity Closer

Polypipe TDI



Properties

- 'u' values from 0.15 – 0.25
(Refer to 'u' Values Table - pages 22 – 23)
- Damp proofs
- Insulates
- Fire stops
- Ideal for timber framed buildings
- Eliminates the cold bridge
- No special installation techniques
- Easily cut with a knife
- incorporates Polyethylene DPC to British Standard BS6515




TDI Firestop 0.25 has been thermally assessed by the British Board of Agrément.

Manufactured from a foil faced non-combustible ice rock mineral wool core completely enclosed in Polyethylene DPC for maximum protection against water penetration coupled with maximum insulation.


Supplied in 2.44 metre lengths, 20 per pack. Cavity widths are available from 50mm to 125mm.

Fixing clips included.


Diagram

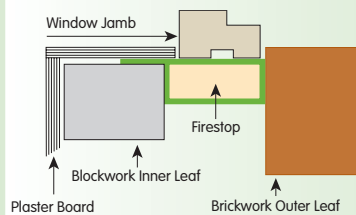

Section

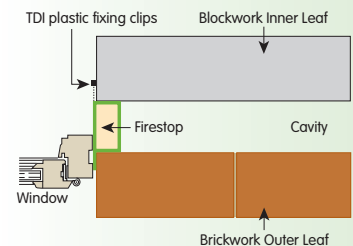

Section

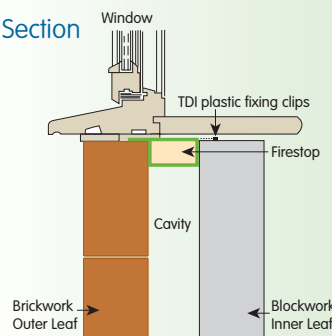

Polypipe TDI

Unit 3 Unity Complex Dale Rd North Darley Dale Matlock Derbyshire DE4 2HX

Tel: +44 (0) 1629 733177 Fax: +44 (0) 1629 732779

E-mail: tdi.sales@polypipe.com Website: www.polypipe.com

