


1m SmartDrain - Overview

CODE MCD1000

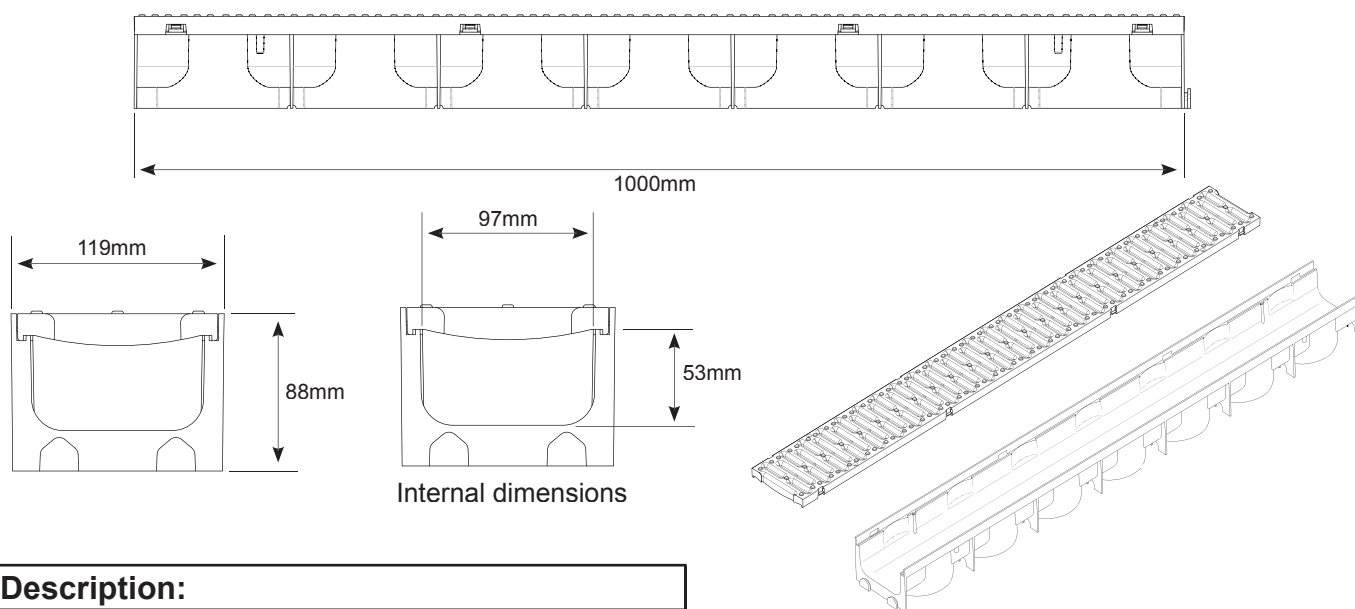

Description:

The Polypipe 1m linear drainage channel is an easy and effective way of removing unwanted standing water into a domestic drain. The channel and grate have been independently load tested and gained an A15 load rating in accordance with BS EN 1433:2002. (Ceram certificate number SW036.07)

It is suitable for both pedestrian and light vehicular use on driveways, patios and paths around the home. The system can be installed with any type of paving from block paving and flag stones through to Tarmac or concrete.

A leaf trap and end cap are available as accessories to the channel and grate. The leaf trap simply falls into the hole cut for the rainwater exit and will catch any large debris to avoid blocking up underground drain pipes. This is easily accessible once installed for removal and cleaning. The end cap can be fitted to both ends of the channel using the handy clip feature and forms a barrier for the concrete being poured around it when being installed as well as providing a water tight stop on the end of the channel when in use. Also available is a Junction Unit to create 90° corner, T-junction or 4-way junction. Both the Junction Unit and 1m SmartDrain are available in black.

References:

BS EN 1433:2002
Ceram certificate number SW036.07

Packing details

Individual lengths,
48 or 96 per pallet

Weight

1.5kg

Material

Polypropylene

Colour

Black

Manufacturing Process

Injection Moulded

Features:

Easy to fit and maintenance free.

Sections slot together making installation quicker and easier.

Can be cut down to any length with the clip reusable at 6 points along its length.

Multiple rainwater exit points with easy cut-out features for added choice and versatility.

Fits to a standard 4" underground plastic drainage pipe.

Clip down grate which can be further secured using 3.5 x 30mm self-tapping screws at the four points provided.

Polypipe Building Products
Broomhouse Lane, Edlington,
Doncaster, South Yorkshire
DN12 1ES
UK

TEL: 01709 770000
FAX: 01709 770001
EMAIL:
info@polypipe.com
WEB
www.polypipe.com

The company maintains a policy of continuous development of its product range and reserves the right to amend the specification without notice.

Issue


B

Polypipe Building Products

Product Information Sheet

1m SmartDrain Overview

CODE MCD1000

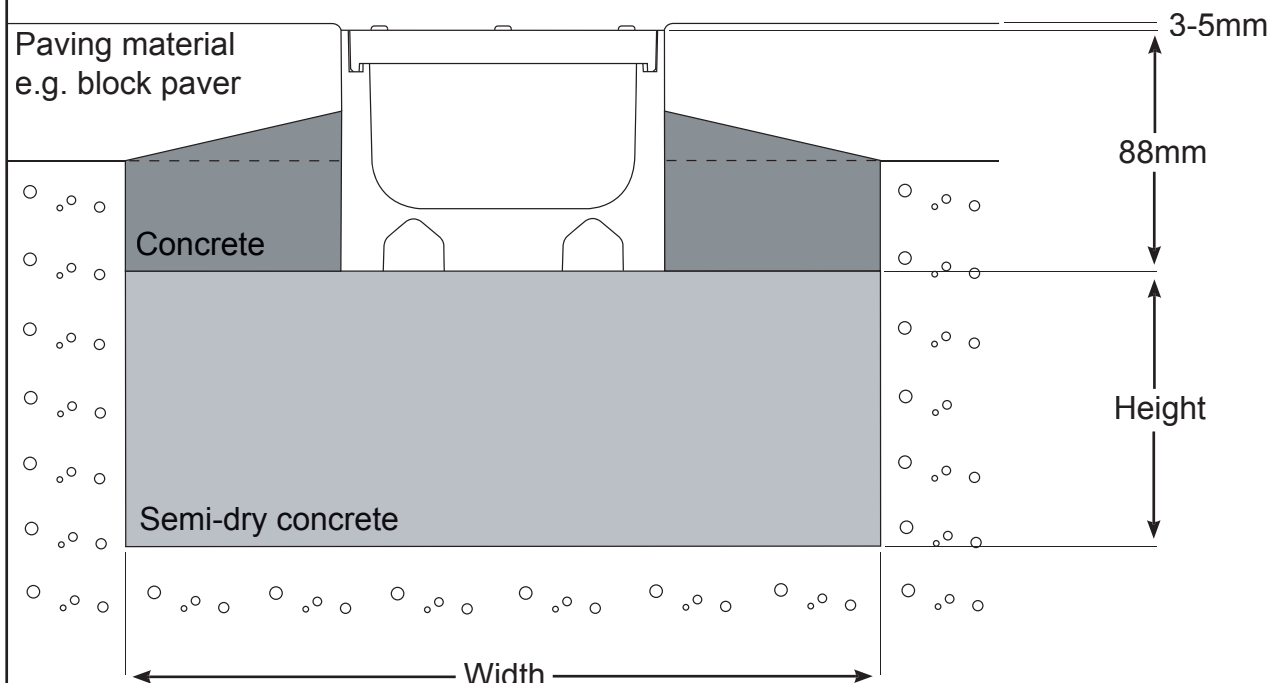

	Light vehicular traffic	Pedestrian traffic
Depth	100mm	50mm
Width	275mm	250mm

The trench size should be calculated according to the above table and diagram depending on the type of use which the channel will subjected to.

When digging the trench in which to place the channel, it is important that the correct fall is integrated. A fall of 1 in 40 (25mm in 1m) will guide the water to the outlet at a substantial rate to avoid puddling and debris sticking.

The concrete used should be no less than a C25 strength mix, which when fully cured will withstand 25 N/mm² of compressive force.

To fit the outlet pipe straight to an elbow or other junction, first cut a small section of 4" pipe approximately 100mm long and use that to sleeve between the channel outlet and the junction.

Polypipe Building Products
Broomhouse Lane, Edlington,
Doncaster, South Yorkshire
DN12 1ES
UK

TEL: 01709 770000
FAX: 01709 770001
EMAIL:
info@polypipe.com
WEB
www.polypipe.com

The company maintains a policy of continuous development of its product range and reserves the right to amend the specification without notice.

Issue

B