



SlotDrain Junction Unit


CODE MSD1003





118mm

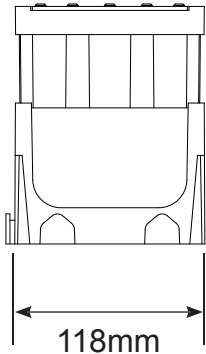

118mm

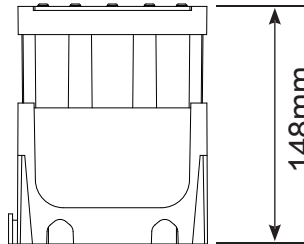

148mm

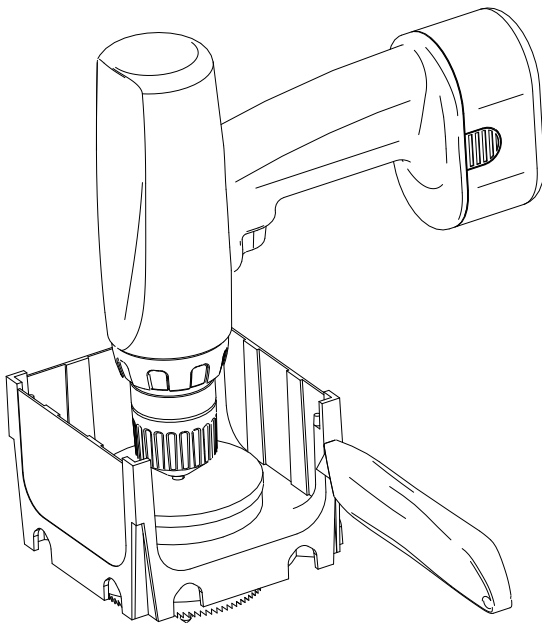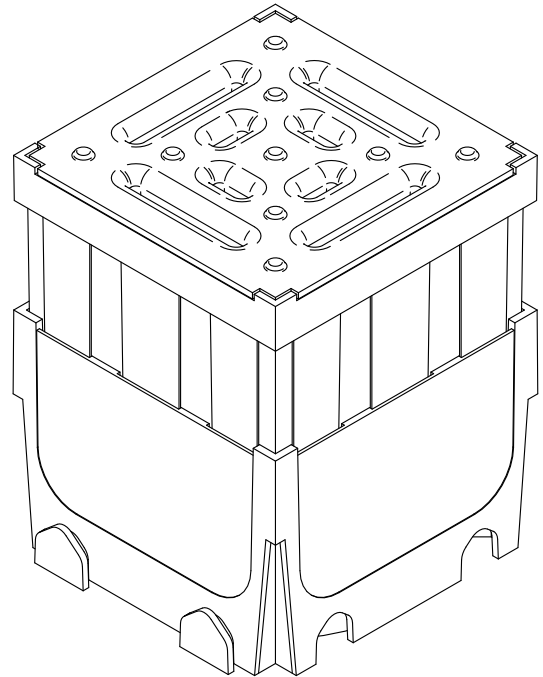

Description

The SlotDrain Junction Unit is made up of 3 components; a channel base, an extension piece and a grate lid. A SlotDrain Junction Unit should be placed at each end of a SlotDrain run and longer runs should include a Junction Unit at 3m intervals to allow access for rodding and cleaning. The SlotDrain Junction Unit can also be used for creating 90° corners, T-junctions and 4-way junctions. The relevant thinned out sides need to be removed before use which can easily be done with a utility knife. Fig. A shows how the base of the unit can be cut out using an 80mm dia. hole saw. There is a drill centre point located on the base to aid cutting, after which a leaf trap can be placed in the hole and using the circular ribs to locate a 4" underground drain pipe, the unit can be used as an outlet.

Packaging	6 per box
Weight	2.0kg per box
Colour	Black
Material	Polypropylene
Manufacturing Process	Injection moulded

Polypipe Building Products
Broomhouse Lane, Edlington,
Doncaster, South Yorkshire
DN12 1ES
UK

TEL: 01709 770000
FAX: 01709 770001
EMAIL:
info@polypipe.com
WEB
www.polypipe.com

The company maintains a policy of continuous development of its product range and reserves the right to amend the specification without notice.

Issue

A