

Uniclass L7534			
CI/SfB			
	(57)	Х	
DVCD 4			14 2017

VENTILATION GUIDE 2017

Mechanical Ventilation with Heat Recovery Mechanical Extract Ventilation Intermittent Extract Fans Rigid and Semi-Rigid Duct Systems



Contents



SECTION 1

Domus Ventilation

4-5

Description	Page 4
Company Overview	
Customer Services & Stockists	5
Technical Support & Delivery	 5



Description	Page
MVHR Introduction	6
HRX-aQ MVHR	8
HRXD MVHR	12
HRX2D MVHR	14
Bluebrain Control	16

Discount %



Description	Page
MEV Introduction	18
CMX MEV	20

Discount %



Page
22
23

Discount %

SECTION 5

Intermittent Extract Fans

24-53

DescriptionPageFans Introduction24

Axial Fans

For short duct runs terminating to an external grille. Wall/window mounted options.

Description	Page
100mm Energy Efficient, Sapphire	26
100mm Sapphire	27
100mm Sapphire Fan Accessories	29
100mm SDF	30
100mm Auto Shutter, SVC	31
100mm Compact, Classic	32
150mm Energy Efficient, Sapphire	33
150mm SDF	34
150mm Auto Shutter, SVC	35
150mm Compact, Classic	36

Discount %

In-Line Fans

For short duct runs and shower applications. Loft mounted.

Description	Page
100mm Energy Efficient, Sapphire Axial	37
100mm Sapphire Axial	38
100mm DVF Axial	39
100mm Spotvent Axial	40
100mm DVF Centrifugal	41
100mm Spotvent Centrifugal	42
100mm Vitalis Mixed Flow	43
100mm High Perf, Spotvent Mixed Flow	44
150mm High Perf, Vitalis Mixed Flow	45

Discount %

Centrifugal Fans

For long duct runs. Wall/window mounted options.

Description	Page
100mm Energy Efficient, Sapphire	46
100mm Sapphire	47
100mm Curzon	48
100mm Plug-In, Mayfair High Perf	49
100mm Plug-In, Mayfair	50
100mm Plug-In, Mayfair Classic	51
100mm Low Maintenance, Kitchenaire	52

Discount %

Fan Controls

Description	Page
Control Options	53

Discount %

www.domusventilation.co.uk





Rectangular

- 110x54mm
- ■204x60mm
- 220x90mm

Description	Page
Duct	56
Duct Fixings	57
Duct Insulation	58
Duct Sound Attenuation	58
Fire Compartment Integrity	59
Flexible Hose	59
Flexible Hose Connectors	59
Internal Duct Terminals	59
External Wall Duct Terminals	60

Round

- ■Ø100mm
- ■Ø125mm
- ■Ø150mm

Product	Page
Duct	64
Duct Fixings	65
Condensation Control	65
Duct Insulation	66
Fire Compartment Integrity	66
Flexible Hose	67
Flexible Hose Connectors	68
Aluminium Duct	68
Insulated Hose and Aluminium Duct Fixings	68
Insulated Hose	68
Internal Duct Terminals	69
External Wall Duct Terminals	70
External Roof Duct Terminals	72

Ancillaries

Description	Page
Duct Seals	73

Adapters

Description	Page
In-Line Adapters	74
Plenums	76

Duct Kits

Description	Page
Background Ventilators	77
Cooker Hood Extraction	78
Tumble Dryer Extraction	80
High Rise	81

Duct Solutions

Description	Page
Flow Control Plenums	82
High Efficiency Green Line	
Rigid Duct Bends	83
Sound Attenuators	84
Domus Thermal Rigid Duct Insulation	86
Fire-Stopping Compartment Products	88

SECTION 7

Radial Systems 90-101



Discount

%

100

SECTION 8

Domus Ventilation Support **102-110**

Radial Solutions (Domus Adapt)

Description	Page
Training	102
Project Notes	104
Glossary	106
Index	107
Terms and Conditions	110



Your carriage paid level is:

All prices quoted exclude VAT and do not include trade discounts.

Stockist:

Contact name:

Contact tel:

Date of terms quoted:

Discount %



Section 1 | The market leading ventilation brand





(Mechanical Ventilation with Heat Recovery) Whole house See page 6



(Mechanical Extract Ventilation) Whole house See page 20



(Decentralised Mechanical Extract Ventilation) Single wet room See page 22



Fans Intermittent Extract Ventilation Single wet room See page 24



Rigid Duct Traditional straight duct and fittings Whole house & single room See page 54



Radial Systems Incorporate MVHR or MEV with semi-rigid Ø75mm duct Whole house & single room See page 90

Suitable for all residential applications:



Apartments Homes



Hotels





Flats



Student Accommodation



Care Homes

4 www.domusventilation.co.uk







Customer Services

We believe at Domus Ventilation we have some of the best people within the industry working together to support all our customers. We pride ourselves on the excellent quality of service our team provides and operate in a culture of continual improvement.



Stockists

At Domus Ventilation we have two significant manufacturing facilities, that help guarantee quick availability through a loyal nationwide network of Merchant and Electrical Wholesaler stockists. To find your nearest stockists or if you are interested in becoming one, please call 03443 715523.



Design and Technical Support

Understanding your ventilation requirements is integral to ensuring that we tailor our solutions to meet your needs. Our experienced team is therefore available to help you with your project or sales enquiry and provide services

- FREE bespoke design guidance
- Speedy quotations

ranging from:

- On-site engineering assistance
- Commissioning and serving
- Installer training accredited by BPEC
- Access to a FREE of charge BIM library



Delivery

To promptly service our national network of stockists, we offer a dedicated and managed logistics fleet, who are dedicated to providing efficient, quick and reliable delivery.

Section 2 | Mechanical Ventilation with Heat Recovery (MVHR)

Helps to create a healthy and clean indoor air environment whilst reducing household energy consumption.

Inadequate ventilation coupled with airborne pollutants can lead to poor indoor air quality and as a consequence may have a detrimental effect on an occupant's health and comfort.

Incorporating a highly efficient Mechanical Ventilation with Heat Recovery (MVHR) system is an effective way of avoiding this and helps to maintain a healthy living indoor environment.

How it works

Also referred to as System 4 in Approved Document F of the Building Regulations, MVHR efficiently combines supply and extract ventilation into one centralised system.

As its primary function, waste, polluted and moist air is extracted from a dwelling's wet rooms via a duct system and is passed through a heat exchanger before being exhausted outside. Fresh incoming air is filtered and as an added benefit, pre-warmed via the heat exchanger and evenly distributed to the habitable rooms, thus reducing household energy consumption and the demand on existing heating systems.


The technology is most effective when installed in an air-tight dwelling as the effect is not compromised by external leakage.



6 www.domusventilation.co.uk





When installed with Domus duct systems, the HRX range provides the ultimate energy saving ventilation system.

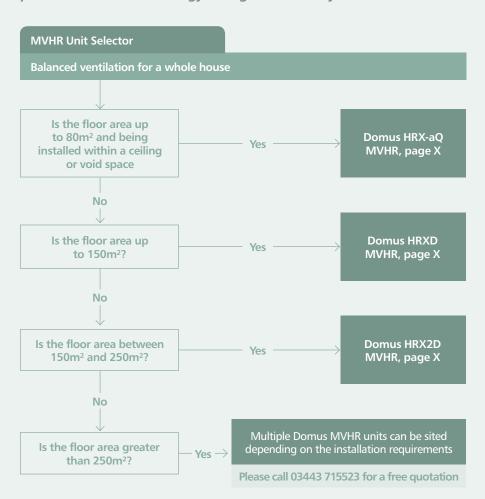

HRX-aQ MVHR


Fits into ceiling voids and utility cupboard spaces

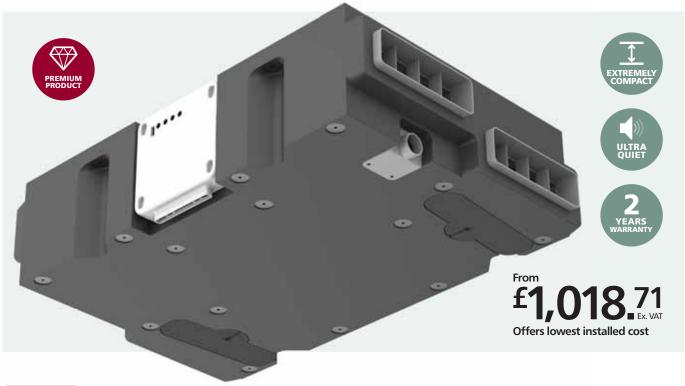


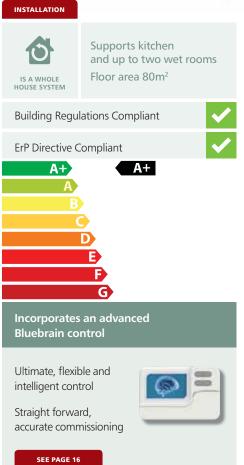


The most compact and intelligent void mounted MVHR ceiling unit in the market, the HRX-aQ enables contractors to deliver quicker installation with minimum hassle.

- Very low Specific Fan Power (SFP) down to 0.66 W/(l/s)
- Bluebrain control optimises the unit's functionality and allows for quick and easy commissioning through simple speed adjustment buttons
- High heat exchange efficiency up to 88%
- Extremely quiet in operation, down to 24dB(A)
- Compact and lightweight weighs down to 7.9kg and measures from 199mm in depth
- 'Total Heat' Energy Recovery Ventilation (ERV) models remove the need for a condensate drain and help create optimal levels of air comfort
- Effectively extract up to 30l/s at boost (for a kitchen and two wet rooms)

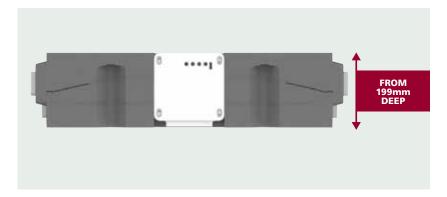


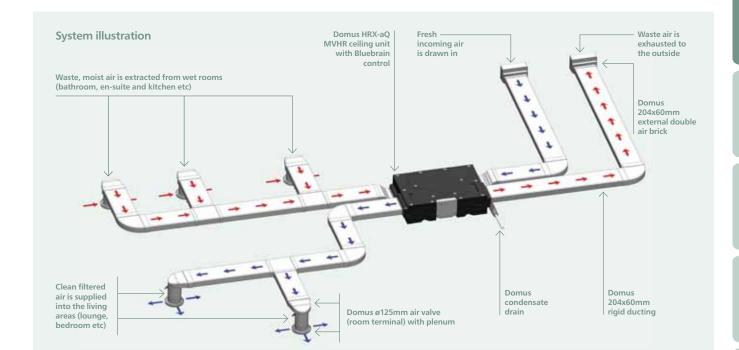

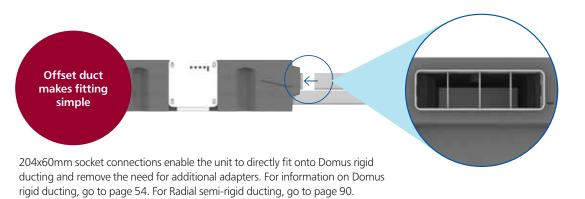

Code	Unit Depth	Thermal (Summer) Bypass	'Total Heat' Energy Recovery Exchanger (ERV)	Price
AQH200-S	199mm			£1,018 ^{.71}
AQH200E-S	199mm		~	£1,260.00
AQH200-B	199mm	4		£1,067 ^{.22}
AQH200E-B	199mm	*	~	£1,305.00
AQH240-S	239mm			£1,164.24
AQH240E-S	239mm		~	£1,395.00
AQH240-B	239mm	4		£1,212.75
AQH240E-B	239mm	~	~	£1,440.00

Code	Accessory	Price
297	Condensate Drain	£64.17

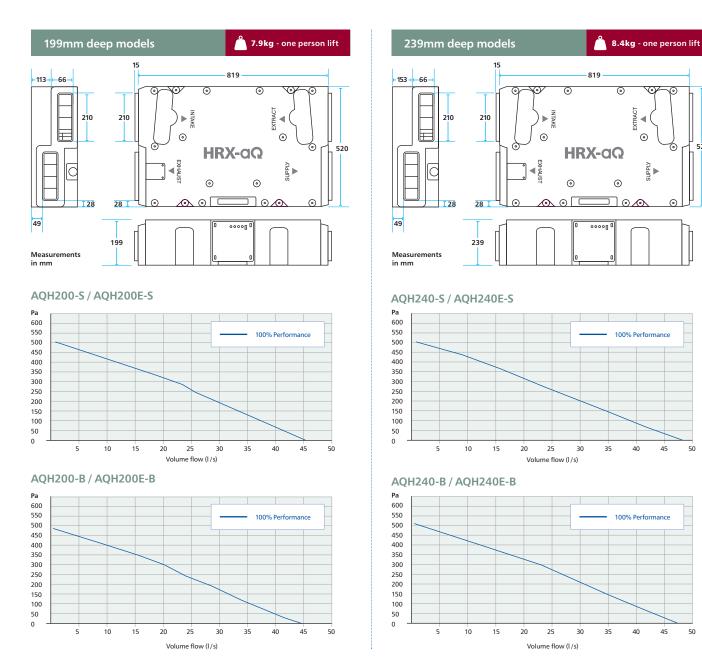






HRXD MVHR


Mounts onto a wall in either a kitchen or utility cupboard space, or in a loft




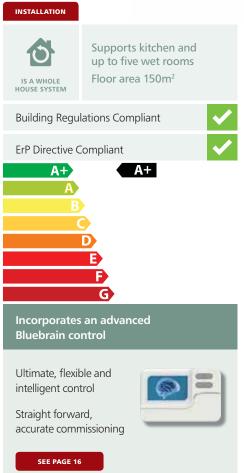

A highly intelligent and lightweight MVHR unit, the HRXD offers superior performance coupled with easy installation and user operation.

- Very low Specific Fan Power (SFP) down to 0.66 W/(l/s)
- Bluebrain control optimises the unit's functionality and allows for quick and easy commissioning through simple speed adjustment buttons
- High heat exchange efficiency up to 86%
- Very quiet in operation, down to 35dB(A)
- Compact and lightweight weighs down to 11.5kg and measures from 290mm in depth (standard kitchen cupboard size)
- Effectively extracts up to 72l/s at boost

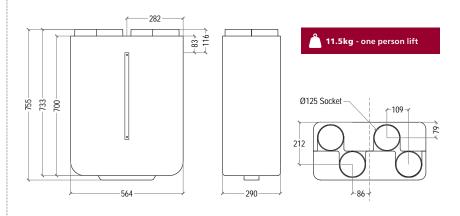

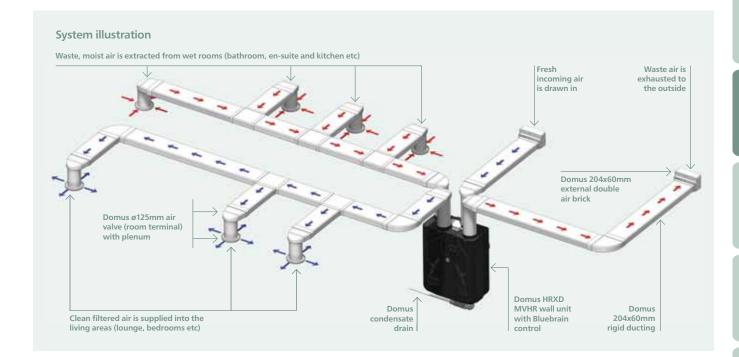




For installation with Domus rigid ducting, see page 54. Alternatively for Radial semi-rigid ducting go to page 90.

Code	Unit Depth	Thermal (Summer) Bypass	Price
HRXD	290mm	✓	£1,126.44

Code	Accessories			
297	Condensate Drain		£64.17	
HRXC-AF	Air Filters		£ 24 .19	
HRX-CK1	Hose Connection Kit		£ 45 .86	

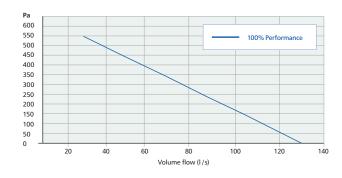




HRX2D MVHR


Mounts onto a wall in either a kitchen or utility cupboard space, or in a loft




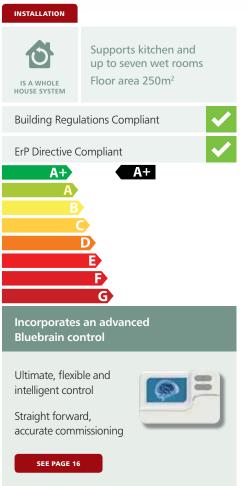

Ideal for larger developments, the HRX2D is a highly efficient and intelligent MVHR unit, which is quick and easy to install and operate.

- Extremely low Specific Fan Power (SFP) down to 0.57 W/(l/s)
- Bluebrain control optimises the unit's functionality and allows for guick and easy commissioning through simple speed adjustment buttons
- High heat exchange efficiency up to 94%
- Very quiet in operation, down to 35dB(A)
- Effectively extracts up to 113l/s at boost

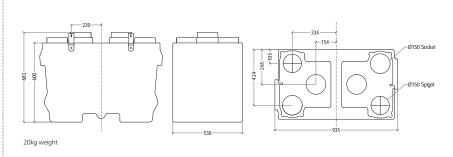


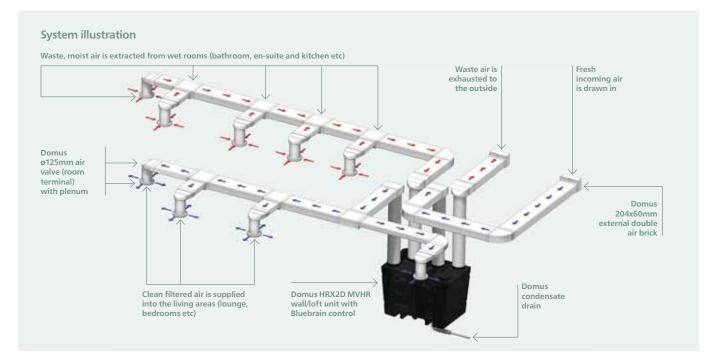



Code	Unit Depth	Thermal (Summer) Bypass	Price
HRX2D	290mm	~	£1,506 ^{.83}

Code	Accessories	Price
297	Condensate Drain	£64.17
HRX2C-AF	Air Filters	£45.64
HRX2-CK1	Hose Connection Kit	£ 53 .59

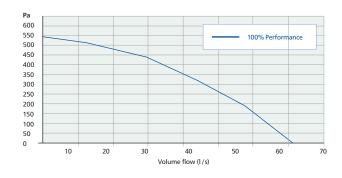



Bluebrain Control

Optimises Domus MVHR systems, as well as making commissioning simpler







Control functions

- Increase value/speed (+)
- Decrease value/speed (-)
- Set temperature activation point
- 2 Set date and time
- Set humidity trigger point
- Adjust thermal (summer) bypass
- Copy program
- Select and edit program
- Escape function
- Save function

Through advanced AMIE technology (Air Management for Indoor Environments), the Bluebrain controller not only offers simple pre-programmed functions, such as night time cooling and intelligent thermal bypass, it also allows for straightforward commissioning.

Intelligently manages air conditions

Digital humidity control aiding homeowner comfort

Through advanced AMIE technology, unlike typical humidity sensors, the Bluebrain MVHR controller will enable occupants to have direct control over managing the humidity levels in their home – to suit personal comfort levels.

By accurately measuring air humidity, the MVHR's extract speed automatically changes from background to boost as the level of humidity increases, thereby providing optimal ventilation performance.

Advanced thermal bypass control

Perfect for night time cooling or during warmer periods, the MVHR controller detects when the air temperature reaches a pre-set level and intelligently activates the thermal bypass mechanism to maximise the effect of maintaining fresh and filtered air. The thermal bypass is also programmable by time, for additional convenience and comfort.

Commissioning made easier

Simple speed control

Engineered to include independent speed control, the Bluebrain control allows quick and accurate commissioning through simple speed adjustment buttons.



Dirty filter indicator

Automated filter maintenance and replacement reminders

Ease of maintenance and filter replacement is an important consideration when choosing MVHR - not only to ensure performance of the unit is maximised and air quality maintained, but also for peace of mind. The MVHR Bluebrain control removes this concern by providing helpful maintenance reminders for cleaning its filters.

BMS capabilities

Building Management Systems (BMS)

The MVHR controller incorporates volt free contacts for fault and filter cleaning indication, to work with a Building Management System.


AMIE technology takes the hassle out of commissioning MVHR.

Control features summary

- Includes advanced AMIE technology (Air Management for Indoor Environments)
- Power indicator
- Status indicator (frost protection, thermal bypass, etc.)
- Fault indicator with diagnostics
- Independent fan speed control
- Switched live inputs (signal triggers):
 - Mains level x 2
 - Volt free to boost x 2
- Volt free to max x 1
- 3 variable speeds
- Clean filter indicator
- Frost protection
- Built in humidistat
- Run on boost timer
- Delay 'on' boost
- Pre commissioning filter protection
- Discreet run monitor
- Lockable commissioning mode
- BMS features:
 - Pre heater activation output
 - Remote shutdown
 - System healthy monitor and fault signals
- Time and date display
- Real time air temperature display
- Real time extract air humidity level display
- Easy to read, contemporary digital display

The Bluebrain controller is compatible with the following MVHR units:

HRX-aQ



See page 8

Fits into ceiling voids and utility cupboard spaces.

HRXD



See page 12

Mounts onto a wall in either a kitchen or utility cupboard space, or in a loft.

HRX2D



See page 14

Mounts onto a wall in either a kitchen or utility cupboard space, or in a loft.

Section 3 MEV Introduction

A continuous, effective and efficient means of maintaining the indoor air quality that you breathe and live in.

Particularly in new modern air tight properties, a build-up of condensation, mold and stale air can negatively impact the health of occupants and the fabric of the home. Installing an energy efficient Mechanical Extract Ventilation (MEV) system will effectively help to remove these pollutants and maintain a healthy indoor air quality.

How it works

Also referred to as System 3 in Approved Document F of the Building Regulations, an MEV system consists of a centralised ventilation unit that continuously extracts waste, polluted and moist air from wet rooms and can be discreetly positioned in either a cupboard, utility room, ceiling or loft space.

An MEV system can be ducted throughout the dwelling and operated by the homeowner through a range of control options. Typically dual speed, MEV systems provide both low speed continuous trickle ventilation and high speed boost flow when required. Replacement fresh air is drawn into the dwelling through background ventilators i.e. air inlets, located in the living areas.



18 www.domusventilation.co.uk

MEV Intro



- Improves indoor air quality through continuous ventilation
- Delivers quicker installation with minimum hassle
- Helps reduce the Dwelling Emission Rate (DER) to secure additional SAP points
- Provides peace of mind that the unit's performance complies with Building Regulations


■ Fits easily into joist spaces



One of the most versatile and easiest to install MEV solutions. Engineered for optimum system performance and to provide discreet operation.



Helps to provide healthy and clean indoor air.

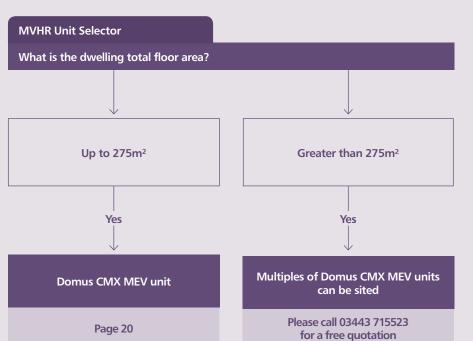





Domus CMX air supply kits provide effective background ventilation.

CMX MEV


Fits into ceiling voids and utility cupboard spaces - horizontally or vertically

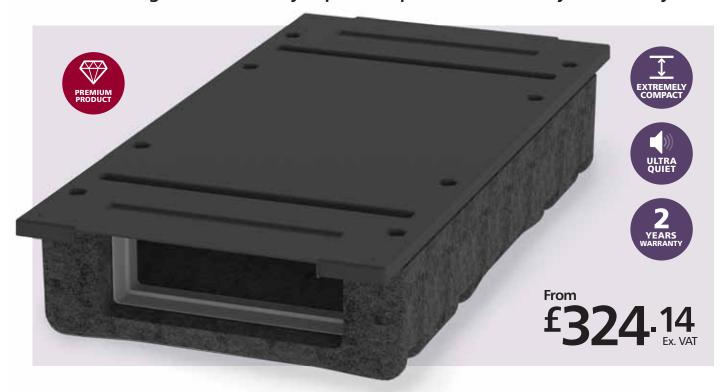

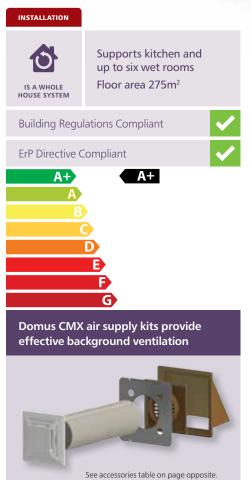

At just 125mm in depth, the CMX is one of the most versatile, easy to install and energy efficient MEV solutions available on the market.

- Extremely low Specific Fan Power (SFP) down to 0.24 W/(l/s)
- Exceptionally compact (125mm deep) and lightweight (3.25kg), ideal for small ceiling void depths
- Very quiet in operation, down to 34dB(A)
- Distinct EPP casing reduces noise
- High air flow performance up to 120 l/s
- In-line ports enable straightforward duct connection
- Flexible home owner control (3 speed options)

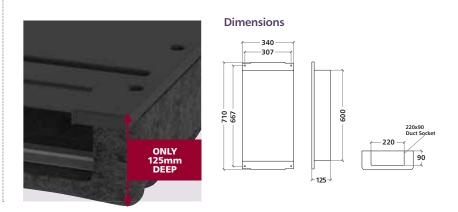

The CMX 220x90mm sockets enable a simple, straight in and out duct run. For information on 220x90mm rigid duct, see page 55. Alternatively for Radial semi-rigid duct options, see page 90.



Code	Unit Depth	Price			
CMX-S	CMX-S 125mm				
Code	Accessories	Price			
CMX-ASK1W	Air Supply Kit with White Cowl	£51.86			
CMX-ASK1B	Air Supply Kit with Brown Cowl	£51.86			
ANC848A	Low/Boost Switch	£25.67			
ANC849A	Low/Boost and Occupied/Unoccupied Switch	£33.67			
ANC850A	Low/Boost/Purge Switch	£33.67			
ANC108A	Timer Switch	£ 74 .89			
ANC808A	Timer and Humidity Switch with Neon Indicator	£ 147 .29			
ANC802A	Timer and Humidity Switch	£156.99			
ANC813A	Timer and PIR Switch	£166.69			
ANC846A	Timer and Humidity Switch with Duct Mounted Sensor	£ 174 .49			
ELE150R	Six Input Junction Box	£83.21			

Section 4 Decentralised Mechanical Extract Ventilation (dMEV)

Our highly efficient Domus dMEV range offers continuous low level ventilation – to a single wet room, coupled with virtually silent operation.

Also known as System 3 in Approved Document F of the Building Regulations, decentralised Mechanical Extract Ventilation (dMEV) systems incorporate continuously running extract fans, designed to remove waste and moist air from a single wet room.

dMEV fans continuously extract the waste air at both low trickle or boost speeds, as determined by the homeowner through a range of control options. Replacement fresh air is then drawn into the dwelling via background



SAP ratings

As an added benefit to developers, specifiers and self-builders, incorporating a dMEV system will also help to lower a property's Dwelling Emission Rate (DER) and therefore provide a higher SAP rating.



Sapphire Range

Stylishly designed to discreetly complement modern interior design schemes, our dMEV Sapphire range offers exceptionally high levels of energy efficient performance and operates almost silently; ensuring homeowners are not disturbed whilst maintaining continuous and effective balanced ventilation.







100mm (4") Energy Efficient, Centrifugal

Mounts onto a wall or ceiling














COMPLIES WITH

ErP Directive Building Regulations



- Stylish fascia to fit interior design scheme
- Very low SFP down to 0.29 W/(l/s)
- Ideal for long duct runs, with up to 6m in duct


For technical information visit: www.domusventilation.co.uk

£160.60 Ex. VAT









Measured in mm A: 170 **B:** 170 **C:** 110 **D:** 99 **E:** 72 **F:** 69







Specific Fan Power W/(l/s)

Code	Timer	Humidistat	SELV		Through-Wall Other Wet Room		In-Room Other Wet Room	Weight (kg)	Price
DME100C	*	~		0.29	0.35	0.29	0.35	0.85	£160.60
DME100LVC	*	~	~	0.29	0.35	0.29	0.35	0.85	£176.66

Section 5 Intermittent Extract Fans

Our range of Domus bathroom and kitchen fans provide rapid local extraction and include axial, in-line shower and centrifugal options. With a number of years presence in the UK market, our Domus range has earned itself a superb reputation for quality, reliability and ease of installation.

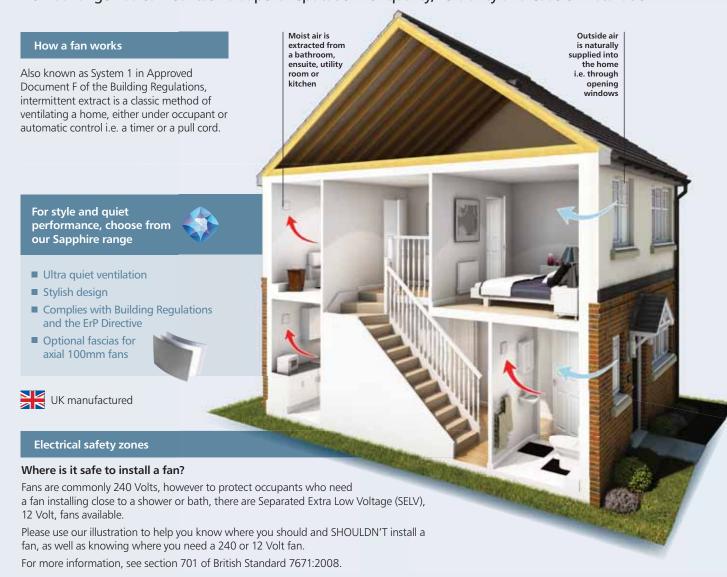

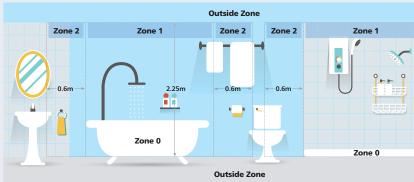

If in doubt, contact a qualified electrician for installation.

Zone (

No fans permitted.

Outside Zone

Fans positioned in this area will be less effective.

Zone 1

12 Volt (SELV) fans.

Must be positioned above Zone 0 over 2.25m from the floor.

Zone 2

230 Volt fans.

Must be positioned horizontally 0.6m from Zone 1.

24 www.domusventilation.co.uk

How to choose the right fan



Step one

What sort of property are you installing into:







An existing property?





Step two

What wet room are you installing into:









Step three

What sort of fan and model do you want:

Axial models - pages 26-36



Connect to a short duct run, up to 1.5m in length, typically running through a wall to an external grille.

Typical axial installation




In-Line models - pages 37-45



Perfect for shower applications and commonly mounted in a loft or ceiling void with up to 3m of duct.

Typical in-line installation



Centrifugal models - pages 46-53



Suitable for longer duct runs up to 6m in length and can be wall or ceiling mounted.

Typical centrifugal installation





Step four

What voltage your fan should be: 240V or 12V (SELV).

For more information on whether you need a 240V or a 12V (SELV) fan, see page 24 (left).





Step five

What extra options do you need:



Timer



Cord



Humidistat







LED





Kit



Retail **Pack**

Speed

100mm (4") Energy Efficient Mounts onto a wall



















- Offers a very low SFP down to 0.22 W/(l/s)
- Very quiet in operation
- Stylish fascia to fit interior design scheme
- Ability to mix and match fascia options, see page 29

For technical information visit: www.domusventilation.co.uk

From









Measured in mm A: 150 **B**: 150 **C**: 37 **D**: 99 **E**: 139 **F**: 75 **G**: 75











Code	Timer	Pull Cord	Humidistat	SELV (12V)	Retail Pack	Extract Volume (l/s)	Extract Volume (m³/h)	Max Pressure (Pa)	Weight (kg)	Price
GTF100-S						25	90	28	0.7	£13.56
GTF100LV-S				~		22	79	31	0.8	£ 52 .22
GTF100-SR					~	25	90	28	0.7	£15.25
GTF100-PC		~				25	90	28	0.7	£ 19 .93
GTF100LV-PC		~		~		22	79	31	0.8	£ 58 .59
GTF100-PCR		~			~	25	90	28	0.7	£ 21 .64
GTF100-T	~					25	90	28	0.7	£ 17 .89
GTF100LV-T	~			~		22	79	31	0.8	£ 56 .55
GTF100-TR	~				~	25	90	28	0.7	£ 19 .59
GTF100-H	~		~			25	90	28	0.7	£ 57 .94
GTF100LV-H	~		~	~		22	79	31	0.8	£ 96 .60
GTF100-HPC	~	~	~			25	90	28	0.7	£65.05
GTF100LV-HPC	~	~	~	~		22	79	31	0.8	£103.70
GTF100-HPCR	~	~	~		~	25	90	28	0.7	£66.74



For backdraught shutter models, add BS to the end of your code. Prices for fans and backdraught are available by emailing vent.sales@domusventilation.com

Sapphire Range

100mm (4") Mounts onto a wall

SUITABLE FOR















ErP Directive



Provides effective ventilation

Building Regulations

- Quiet in operation
- Stylish fascia to fit interior design scheme
- Ability to mix and match fascia options, see page 29

For technical information visit: www.domusventilation.co.uk

From











Measured in mm A: 150 **B**: 150 **C**: 37 **D**: 99 **E**: 139 **F**: 75 **G**: 75












					~~					
Code	Timer	Pull Cord	Humidistat	SELV (12V)	Retail Pack	Extract Volume (l/s)	Extract Volume (m³/h)	Max Pressure (Pa)	Weight (kg)	Price
STF100-S						17	63	28	0.7	£ 12 .26
STF100LV-S				~		25	89	29	1.6*	£ 57 .74
STF100-SR					~	17	63	28	0.7	£ 14 .25
STF100-PC		~				17	63	28	0.7	£18.02
STF100LV-PC		*		~		25	89	29	1.6*	£ 63 .50
STF100-PCR		~			~	17	63	28	0.7	£20.02
STF100-T	~					17	63	28	0.7	£ 16 .18
STF100LV-T	~			~		25	89	29	1.6*	£ 61 .66
STF100-TR	~				~	17	63	28	0.7	£ 18 .19
STF100-H	~		~			17	63	28	0.7	£ 52 .40
STF100LV-H	~		~	~		25	89	29	1.6*	£ 97 .88
STF100-HPC	~	~	~			17	63	28	0.7	£ 58 .83
STF100LV-HPC	~	~	~	~		25	89	29	1.6*	£104.31
STF100-HPCR	~	~	~		~	17	63	28	0.7	£60.82

For backdraught shutter models, add BS to the end of your code. Prices for fans and backdraught are available by emailing vent.sales@domusventilation.com *Weight includes transformer.



Sapphire Fan Accessories

For 100mm Sapphire axial wall fans, see pages 26-27

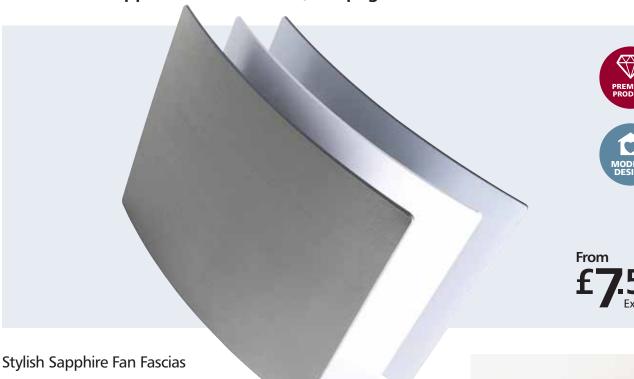

Stylish bathroom and kitchen fan fascias, designed to discreetly fit interior design schemes

• Offer the ability to mix and match 100mm axial fascia options

For technical information visit: www.domusventilation.co.uk

For architectural grilles with rigid duct and flow control plenum, please see page 82. If installing with Radial semi-rigid duct and flow control plenum, turn to page 94.






Fascia, Curved, Gloss White Finish, 210x202mm

Code	Price
TFF100-CF1W	£ 7 .55



Fascia, Curved, Silver Finish, 210x202mm

Code	Price
TFF100-CF1S	£ 11 .98



Code	Price
TFF100-CF1BM	£ 11 .98



Fascia, Circular Indent, Gloss White Finish, 202x202mm

Code	Price
TFF100-DT1W	£ 7 .55



Fascia, Circular Indent, Silver Finish, 202x202mm

Code	Price
TFF100-DT1S	£ 11 .98



Axial 100mm, Wall Fixing Kit, Grille, Gravity Flaps for Frame and Hose

Code	Price
1K	£ 9 .73

Axial Fans SDF Range

100mm (4") Mounts onto a wall


















- Provides effective ventilation
- Extract rates comply with current **Building Regulation requirements**
- Quiet in operation

For technical information visit: www.domusventilation.co.uk

From





Measured in mm **A**: 166 **B**: 166 **C**: 35 **D**: 99 **E**: 45 **F**: 83 **G**: 83









				_						
Code	Timer	Pull Cord	Humidistat	PIR	SELV (12V)	Extract Volume (l/s)	Extract Volume (m³/h)	Max Pressure (Pa)	Weight (kg)	Price
SDF100B						17	63	28	0.6	£ 11 .15
SDF100BLV					~	18	65	29	1.5*	£ 44 .86
SDF100PB		~				17	63	28	0.6	£16.39
SDF100TB	~					17	63	28	0.6	£ 14 .71
SDF100TBLV	~				~	18	65	29	1.5*	£61.81
SDF100HTB	~		~			17	63	28	0.6	£ 47 .64
SDF100HTBLV	~		~		~	18	65	29	1.5*	£ 89 .82
SDF100HBPCLV	~	~	~		~	18	65	29	1.5*	£ 91 .51
SDF100PIR	~			~		17	63	28	0.6	£ 53 .03
SDF100PIRLV	~			~	~	18	65	29	1.5*	£ 95 .21

Code	Accessories	Price
1K	Wall Fitting Kit	£ 9 .73



For backdraught shutter models, add BS to the end of your code.

Prices for fans and backdraught are available by emailing vent.sales@domusventilation.com *Weight includes transformer.

Axial Fans SVC Range

100mm (4") Auto Shutter Mounts onto a wall

SUITABLE FOR
















- Automatic shutters prevent backdraught from entering bathroom or toilet
- Quiet in operation
- Shutters are operated mechanically on the pull cord version or via thermoactuator system on all other models

For technical information visit: www.domusventilation.co.uk

£27.27











Code	Timer	Pull Cord	Humidistat	SELV (12V)	Extract Volume (l/s)	Extract Volume (m³/h)	Max Pressure (Pa)	Weight (kg)	Price
SVC100B					18	66	26	0.6	£ 27 .27
SVC100BLV				~	17	62	27	1.5*	£ 70 .46
SVC100PB		~			18	66	26	0.6	£ 33 .67
SVC100TB	~				18	66	26	0.6	£ 32 .61
SVC100TBLV	*			~	17	62	27	1.5*	£ 79 .64
SVC100HTB	~		~		18	66	26	0.6	£ 56 .15
SVC100HTBLV	*		~	~	17	62	27	1.5*	£107.23
SVC100HTBPC	*	~	~		18	66	26	0.6	£ 59 .56

Code	Accessories	Price
1K	Wall Fitting Kit	£ 9 .73

^{*}Weight includes transformer.

100mm (4") Compact Mounts onto a wall or window

SUITABLE FOR















- Classic design styling
- Quiet in operation
- Compact for easier and discreet installation
- Low standby power usage

For technical information visit: www.domusventilation.co.uk







Measured in mm A: 141 **B:** 141 **C:** 33 **D:** 99 **E:** 58 **F:** 70.5 **G:** 70.5









Code	Timer	Pull Cord	Humidistat	SELV (12V)	Extract Volume (l/s)	Extract Volume (m³/h)	Max Pressure (Pa)	Weight (kg)	Price
S1					15	55	26	0.6	£26.71
SL1 (req transformer)				~	14	49	28	1.5*	£ 31 .91
P1		~			15	55	26	0.6	£28.22
T1	*				15	55	26	0.6	£ 34 .35
H1	~		~		15	55	26	0.6	£ 56 .75

Code	Accessories						
VS	12V Transformer	£66.45					
VT	12V Transformer with Timer	£ 69 .96					
VH	12V Transformer with Humidistat	£ 95 .72					
1W	Window Fitting Kit	£ 14 .40					
1K	Wall Fitting Kit	£ 9 .73					

^{*}Weight includes transformer.

Sapphire Range

150mm (5") Energy Efficient Mounts onto a wall

Axial Fans



COMPLIES WITH **ErP Directive**














Quiet in operation

Building Regulations

Stylish fascia to fit interior design schemes

For technical information visit: www.domusventilation.co.uk

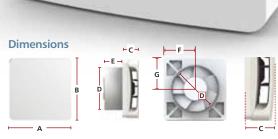

Measured in mm
A: 201 B: 201 C: 44 D: 150 E: 61 F: 100.5 G: 100.5







Code	Timer	Pull Cord	Humidistat	Extract Volume (l/s)	Extract Volume (m³/h)	Max Pressure (Pa)	Weight (kg)	Price
GTF150-S				60	216	50	0.8	£40.23
GTF150-PC		~		60	216	50	0.8	£48.31
GTF150-T	~			60	216	50	0.8	£ 43 .65
GTF150-H	~		~	60	216	50	0.8	£63.56

Code	Accessories	Price
15K	Wall Fitting Kit	£16.66

Axial Fans SDF Range

150mm (6") Mounts onto a window

















- Duct connection Ø155mm
- Provides effective ventilation
- Extract rates comply with current **Building Regulation requirements**
- Quiet in operation

For technical information visit: www.domusventilation.co.uk

£27.28 Ex. VAT





Measured in mm A: 205 **B:** 220 **C:** 53 **D:** 155 **E:** 53 **F:** 102.5 **G:** 110

Code	Timer	Pull Cord	Humidistat	PIR	SELV (12V)	Extract Volume (l/s)	Extract Volume (m³/h)	Max Pressure (Pa)	Weight (kg)	Price
SDF150B						61	220	26	1.0	£ 27 .28
SDF150BLV					~	70	252	37	1.9*	£ 85 .78
SDF150PB		~				61	220	26	1.0	£ 29 .15
SDF150TB	~					61	220	26	1.0	£ 37 .63
SDF150TBLV	~				~	70	252	37	1.9*	£103.11
SDF150HTB	~		~			61	220	26	1.0	£ 51 .35
SDF150HBPC		~	~			61	220	26	1.0	£69.58
SDF150PIR	~			~		61	220	26	1.9*	£ 51 .35

Code	Accessories	
SDF911WFK	Window Fitting Kit	£16.60

^{*}Weight includes transformer.

SVC Range

150mm (6") Auto Shutter Mounts onto a wall or window

SUITABLE FOR

Axial Fans

















- Automatic shutters prevent backdraught from entering kitchen or utility room
- Quiet in operation
- Shutters are operated mechanically on the pull cord version or via thermoactuator system on all other models

For technical information visit: www.domusventilation.co.uk

£41.72 Ex. VAT







Measured in mm

A: 205 B: 220 C: 48 D: 155 E: 53 F: 102.5 G: 110

Code	Pull Cord	Extract Volume (l/s)	Extract Volume (m³/h)	Max Pressure (Pa)	Weight (kg)	Price
SVC150B		61	220	39	1	£ 41 .72
SVC150PB	*	61	220	39	1	£ 44 .86

Code	Accessories	
SVC901WFK	Window Fitting Kit	£ 29 .13

150mm (6") Compact Mounts onto a wall


















- Classic design styling
- Compact for easier and discreet installation
- Quiet in operation
- Extracts a high volume of air
- Low standby power usage

For technical information visit: www.domusventilation.co.uk

£42.84









Measured in mm A: 201 **B:** 201 **C:** 44 **D:** 150 **E:** 61 **F:** 100.5 **G:** 100.5







Code	Timer	Pull Cord	Humidistat	Extract Volume (l/s)	Extract Volume (m³/h)	Max Pressure (Pa)	Weight (kg)	Price
S15				75	270	29	0.8	£ 42 .84
P15		~		75	270	29	0.8	£ 47 .38
T15	~			75	270	29	0.8	£60.90
H15	~		~	75	270	29	0.8	£88.86

Code	Accessories	Price
15K	Wall Fitting Kit	£ 16 .66

Sapphire Range

100mm (4") Energy Efficient Mounts in a loft

SUITABLE FOR

In-Line Fans (Axial)







COMPLIES WITH

ErP Directive	✓	A+ A B
Building Regulations	✓	E) F) G

- Offers an extremely low Specific Fan Power (SFP) down to 0.22 W/(l/s)
- Optional LED models available
- Quiet in operation
- Ideal for shorter duct runs and shower applications
- Duct kit options for easy installation

For technical information visit: www.domusventilation.co.uk

From









Dimensions







Measured in mm A: 130 B: 107 C: 155 D: 99 E: 57.5







		*							
Code	Timer	Retail Pack	Duct Kit	LED Light	Extract Volume (l/s)	Extract Volume (m³/h)	Max Pressure (Pa)	Weight (kg)	Price
GLD100-T	~				18	64	27	0.6*	£ 68 .19
GLD100-TK	~		~		18	64	27	0.6*	£ 74 .52
GLD100-TKR	~	~	~		18	64	27	0.6*	£ 90 .45
GSV100-TKW (White)	~		~	~	18	64	27	0.6*	£125.25
GSV100-TKC (Chrome)	~		~	~	18	64	27	0.6*	£130.00
GSV100-TKWR (White)	~	~	~	~	18	64	27	0.6*	£ 127 .71
GSV100-TKCR (Chrome)	~	~	~	~	18	64	27	0.6*	£132.44

^{*}Weight includes fan only.

100mm (4") Mounts in a loft


SUITABLE FOR







COMPLIES WITH



- Offers a very low Specific Fan Power (SFP) down to 0.37 W/(l/s)
- Optional LED models available
- Quiet in operation
- Ideal for shorter duct runs and shower applications
- Duct kit options for easy installation

For technical information visit: www.domusventilation.co.uk

£23.09










Dimensions







Measured in mm **A:** 130 **B:** 107 **C:** 155 **D:** 99 **E:** 57.5







Code	Timer	Retail Pack	Duct Kit	LED Light	Extract Volume (l/s)	Extract Volume (m³/h)	Max Pressure (Pa)	Weight (kg)	Price
GLD100AC-S					22	80	28	0.6*	£23.09
GLD100AC-SK			~		22	80	28	0.6*	£ 28 .39
GLD100AC-SKR		~	~		22	80	28	0.6*	£ 30 .76
GLD100AC-T	~				22	80	28	0.6*	£ 25 .93
GLD100AC-TK	~		~		22	80	28	0.6*	£ 31 .23
GLD100AC-TKR	~	~	~		22	80	28	0.6*	£ 33 .58
GSV100AGTKWR (White)	~	/	*	*	22	80	28	0.6*	£ 57 .47
GSV100AC-TKCR (Chrome)	✓	*	~	*	22	80	28	0.6*	£ 59 .60

^{*}Weight is fan only.

DVF Range

100mm (4") Mounts in a loft

In-Line Fans (Axial)







COMPLIES WITH

BATHROOM

ErP Directive	✓	A+ A B
Building Regulations	✓	E F G


- Concealed fan for discreet operation
- Quiet in operation
- Ideal for shorter duct runs and shower applications
- Duct kit options for easy installation

For technical information visit: www.domusventilation.co.uk












Measured in mm A: 201 B: 201 C: 44 D: 150 E: 61 F: 100.5 G: 100.5

Code	Timer	Duct Kit	Extract Volume (l/s)	Extract Volume (m³/h)	Max Pressure (Pa)	Weight (kg)	Price
DVF801D			17	62	23	0.6*	£15.44
DVF802D	~		17	62	23	0.6*	£ 20 .33
DVF801ET		~	17	62	23	0.6*	£ 20 .83
DVF802ET	~	~	17	62	23	0.6*	£ 25 .72

^{*}Weight includes fan only.

100mm (4")










COMPLIES WITH




- Includes LED ceiling light
- Concealed fan for discreet operation
- Quiet in operation
- Ideal for shorter duct runs and shower applications
- Duct kit for easy installation

For technical information visit: www.domusventilation.co.uk







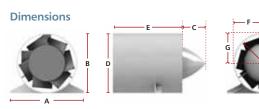

Measured in mm **A**: 201 **B**: 201 **C**: 44 **D**: 150 **E**: 61 **F**: 100.5 **G**: 100.5

Code	Timer	Duct Kit	LED Light	Extract Volume (l/s)	Extract Volume (m³/h)	Max Pressure (Pa)	Weight (kg)	Price
SPV801ETLED		*	~	17	62	23	0.6*	£ 49 .93
SPV802ETLED	~	~	~	17	62	23	0.6*	£ 54 .83

^{*}Weight includes fan only.

DVF Range

In-Line Fans (Centrifugal)

100mm (4") Mounts in a loft




- Ideal for longer duct runs and shower applications
- Duct kit enables easy installation

For technical information visit: www.domusventilation.co.uk

From

£66-22 Ex. VAT



Measured in mm **A:** 215 **B:** 215 **C:** 98 **D:** 75 **E:** 56





Code	Timer	Duct Kit	Extract Volume (l/s)	Extract Volume (m³/h)	Max Pressure (Pa)	Weight (kg)	Price
DVF821ET		~	19	67	117	0.47*	£66.22
DVF822ET	~	~	19	67	117	0.47*	£ 81 .70

^{*}Weight includes fan only.

100mm (4") Mounts in a loft









COMPLIES WITH




- Includes LED ceiling light
- Concealed fan for discreet operation
- Quiet in operation
- Ideal for longer duct runs and shower applications
- Duct kit enables easy installation

For technical information visit: www.domusventilation.co.uk

From

£95.33 Ex. VAT

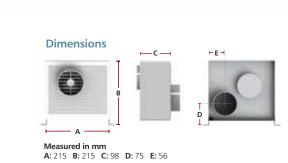







Code	Timer	Duct Kit	LED Light	Extract Volume (l/s)	Extract Volume (m³/h)	Max Pressure (Pa)	Weight (kg)	Price
SPV821ETLED		*	*	19	67	117	0.47*	£ 95 .33
SPV822ETLED	>	>	>	19	67	117	0.47*	£110.81

^{*}Weight includes fan only.


100mm (4") High Performance Mounts in a loft



- Ideal for longer duct runs and shower applications
- Duct kit options enable easy installation

For technical information visit: www.domusventilation.co.uk

£62.87







Code	Timer	Duct Kit	Extract Volume (l/s)	Extract Volume (m³/h)	Max Pressure (Pa)	Weight (kg)	Price
VIT100B			High 44.4 / Low 39.5	High 160 / Low 142	116	1.4*	£ 62 .87
VIT100TB	~		High 44.4 / Low 39.5	High 160 / Low 142	116	1.4*	£68.85
DVF831ET		*	High 44.4 / Low 39.5	High 160 / Low 142	116	1.4*	£ 72 .57
DVF832ET	~	~	High 44.4 / Low 39.5	High 160 / Low 142	116	1.4*	£78.55


^{*}Weight includes fan only.

100mm (4") High Performance Mounts in a loft



Ideal for longer duct runs and shower applications

For technical information visit: www.domusventilation.co.uk









Code	Timer	Duct Kit	LED Light	Extract Volume (l/s)	Extract Volume (m³/h)	Max Pressure (Pa)	Weight (kg)	Price
SPV831ETLED		~	~	High 44.4 / Low 39.5	High 160 / Low 142	116	1.4*	£ 99 .52
SPV832ETLED	~	~	~	High 44.4 / Low 39.5	High 160 / Low 142	116	1.4*	£105.50

Code	Accessories	Price
SPV801TWCG	Spotvent Ceiling Light Grille	£ 34 .50

^{*}Weight includes fan only.

150mm (6") High Performance

Mounts in a loft









COMPLIES WITH



- Very high air flow performance
- Concealed fan for discreet operation
- Quiet in operation
- Ideal for longer duct runs and shower applications


For technical information visit: www.domusventilation.co.uk

From

£126.43







Measured in mm A: 223 B: 250 C: 295 D: 146 E: 130



Code	Timer	Extract Volume (l/s)	Extract Volume (m³/h)	Max Pressure (Pa)	Weight (kg)	Price
VIT150B	~	High 144 / Low 112	High 520 / Low 405	275	2.65	£ 98 .97
VIT150TB	~	High 144 / Low 112	High 520 / Low 405	275	2.65	£113.97

^{*}Weight includes fan only.

100mm (4") Energy Efficient

Mounts onto a wall or ceiling





















- Offers a very low Specific Fan Power (SFP) down to 0.39 W/(l/s)
- Quiet in operation
- Ideal for long duct runs
- Stylish fascia to fit interior design scheme

For technical information visit: www.domusventilation.co.uk

From



Measured in mm A: 170 **B:** 170 **C:** 110 **D:** 99 **E:** 72 **F:** 69









Code	Timer	Pull Cord	Humidistat	SELV (12V)	Extract Volume (l/s)	Extract Volume (m³/h)	Max Pressure (Pa)	Weight (kg)	Price
GCF100-S					19	67	82	0.85	£ 88 .01
GCF100LV-S				~	20	73	91	0.95	£ 98 .79
GCF100-T	*				19	67	82	0.85	£ 99 .82
GCF100LV-T	*			~	20	73	91	0.95	£110.60
GCF100-HPC	~	~	~		19	67	82	0.85	£136.27
GCF100LV-HPC	~	*	~	~	20	73	91	0.95	£ 147 .05

Code	Accessories	Price
SAPFD	Fire Damper Back Plate	£ 172 .04

Sapphire Range

Centrifugal Fans

100mm (4")

Mounts onto a wall or ceiling













ErP Directive	~	A+ A B
Building Regulations	✓	D) E) F) G)

- Provides effective ventilation
- Extract rates comply with current **Building Regulations requirements**
- Quiet in operation
- Ideal for long duct runs
- Stylish fascia to fit interior design scheme

For technical information visit: www.domusventilation.co.uk

From














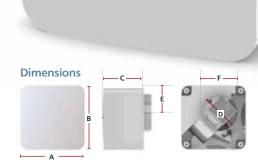

Measured in mm A: 170 **B:** 170 **C:** 110 **D:** 99 **E:** 72 **F:** 69

Code	Timer	Pull Cord	Humidistat	Extract Volume (l/s)	Extract Volume (m³/h)	Max Pressure (Pa)	Weight (kg)	Price
SCF100-S				22	78	107	0.85	£58.19
SCF100-T	~			22	78	107	0.85	£ 87 .11
SCF100-HPC	~	~	~	22	78	107	0.85	£110.33

Code	Accessories	Price
SAPFD	Fire Damper Back Plate	£172.04

Centrifugal Fans Curzon Range

100mm (4")

Mounts onto a wall or ceiling with back box

















- Provides effective ventilation
- Quiet in operation
- Ideal for long duct runs

For technical information visit: www.domusventilation.co.uk

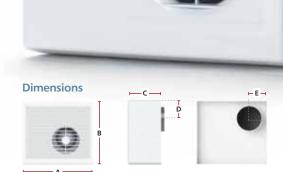

Measured in mm **A:** 224 **B:** 212 **C:** 98 **D:** 56 **E:** 56











				•						
Code	Timer	Pull Cord	Humidistat	PIR	SELV (12V)	Extract Volume (l/s)	Extract Volume (m³/h)	Max Pressure (Pa)	Weight (kg)	Price
CUR7001B						19	67	117	1.1	£ 47 .90
CUR7002B		~				19	67	117	1.1	£ 51 .57
CUR7003B	~					19	67	117	1.1	£63.38
CUR9003LV	~				~	21	75	53	2.0*	£108.33
CUR7004B	~	~	~			19	67	117	1.1	£88.28
CUR9004LV	~		~		~	21	75	53	2.0*	£138.21
CUR7005B	~			~		19	67	117	1.1	£ 83 .20

Code	Accessories	Price
CURFD	Fire Damper Back Plate	£175.05

^{*}Weight includes transformer.

100mm (4") Plug-In High Performance Mounts onto a wall or ceiling with back box

SUITABLE FOR
















- Plug-in design makes it ideal for maintained properties where units may need to be easily replaced
- Provides effective ventilation
- Quiet in operation
- Ideal for long duct runs

For technical information visit: www.domusventilation.co.uk

£147.83



Measured in mm

A: 250 B: 250 C: 40 D: 90 E: 65 F: 65







Code	Timer	Humidistat	dMEV Twin Speed	Extract Volume (l/s)	Extract Volume (m³/h)	Max Pressure (Pa)	Weight (kg)	Price
MTD070BLW	~			17	60	128	1.7	£ 147 .83
MTT070BLW	~		~	19/13	68/46	124/27	1.7	£164.27
MCC070BLW	~	~		17	60	128	1.7	£189.26

Code	Accessories	Price
MAY905A	Front Cover	£ 29 .07
MAY905B	Building In Wall Back Box	£31.27
MAY904A	Surface Installation Back Box, Plastic	£31.27
MAY906A	Surface Installation Back Box, Metal	£ 94 .48

100mm (4") Plug-In

Mounts onto a wall or ceiling with back box



















- Plug-in design makes it ideal for maintained properties where units may need to be easily replaced
- Provides effective ventilation
- Quiet in operation
- Ideal for long duct runs

For technical information visit: www.domusventilation.co.uk

£101.07





Measured in mm A: 250 **B:** 250 **C:** 40 **D:** 90 **E:** 65 **F:** 65













Code	Timer	Pull Cord	Humidistat	PIR	SELV (12V)	dMEV Twin Speed	Extract Volume (l/s)	Extract Volume (m³/h)	Max Pressure (Pa)	Weight (kg)	Price
MSS070B							17	60	128	1.7	£101.07
MSS070BLV					~		20	73	49	3.5*	£138.99
MPC070B		~					17	60	128	1.7	£107.41
MTD070B	~						17	60	128	1.7	£ 104 .81
MTD070BLV	~				~		20	73	49	3.5*	£145.58
MCC070B	~		~				17	60	128	1.7	£145.58
MCC070BLV	~		~		~		20	73	49	3.5*	£ 270 .77
MIR070B	~			~			17	60	128	1.7	£151.62
MTS070B						~	19/13	68/46	124/27	1.7	£120.05
MTT070B	~					~	19/13	68/46	124/27	1.7	£126.36

Code	Accessories	Price	Code	Accessories	Price
MAY905A	Front Cover	£ 29 .07	MAY905B	Building In Wall Back Box	£31.27
MAY904A	Surface Installation Back Box, Plastic	£31.27	MAY906A	Surface Installation Back Box, Metal	£ 94 .48

^{*}Weight includes transformer.

SUITABLE FOR





100mm (4") Plug-In Compact




Mounts onto a wall or ceiling with back box









- Plug-in design makes it ideal for maintained properties where units may need to be easily replaced
- Compact for easier and discreet installation
- Quiet in operation
- Ideal for long duct runs

For technical information visit: www.domusventilation.co.uk



Measured in mm
A: 250 B: 250 C: 40 D: 60 E: 60 F: 68





Code	Timer	Twin Speed	Extract Volume (l/s)	Extract Volume (m³/h)	Max Pressure (Pa)	Weight (kg)	Price
MAY102B			18	66	119	1.5	£180.76
MAY202B	~		18	66	119	1.5	£223.78
MAY402B	~	~	18 / 10	65 / 37	70	1.5	£241.01

Code	Accessories		
MAY907A	Building In Wall Back Box	£ 54 .27	
MAY906A	Surface Installation Back Box, Metal	£ 94 .48	
MAYFD	Fire Damper Back Plate	£210.24	

100mm (4") Low Maintenance Mounts onto a wall

















- Ability to run continuously at a very low level or boost when required
- Large inlet grille maximises extraction and filtration
- Quiet in operation
- Built-in filter for easy maintenance
- Integral backdraught shutter

For technical information visit: www.domusventilation.co.uk

£232.85





Measured in mm A: 337 B: 294 C: 121 D: 99 E: 70 F: 70











Code	Timer Module	Pull Cord Module	Humidistat Module	Two Speed	Three Speed	Weight (kg)	Price
KIT2S-RS				~		3.1	£232.85
KIT2S-T	~			~		3.1	£ 244 .27
KIT2S-PC		~		~		3.1	£232.85
KIT2S-HPC		~		~		3.1	£260.88
KIT2S-HT			~	~		3.1	£271.66
KIT3S-RS					~	3.1	£271.66

Speed	Performance	Extract Volume (l/s)	Extract Volume (m³/h)	Max Pressure (Pa)
Speed 1	9 l/s @ 0PA – 12 Pa @ 0 l/s (Adjustable up to 9l/s)	9	33	12
Speed 2	9 l/s @ 0PA – 27 Pa @ 0 l/s	15	53	27
Speed 3	9 l/s @ 0PA – 101 Pa @ 0 l/s [12W Specific Fan Power 0.39W/(l/s)]	31	111	101

Code	Accessories	Price
1K	Wall Fitting Kit	£ 9 .73

Control Options



Allows for simple fan operation

- Ideal for mechanical extract appliances designed for remote switch operation
- In keeping with conventional wall furniture
- Can be flush or surface mounted using a standard single pattress box

For technical information visit: www.domusventilation.co.uk



Humidistat with Overrun Timer Switch

More sensitive than traditional humidistat controls, Intelligent Humidity Control (IHC) identifies a significant change in humidity. Timer adjustable between 2-25 minutes. W89mm x H89mm x D54mm* 5 amps

Code	Price
ANC802A	£156.99

PIR Switch with Overrun Timer Switch

Activates by detecting movement. Detection distance of up to 5 metres. Timer adjustable between 2-25 minutes.

W89mm x H89mm x D54mm* 5 amps

Code	Price
ANC813A	£166.69

Humidistat with Pull Cord Switch

More sensitive than traditional humidistat controls, Intelligent Humidity Control (IHC) identifies a significant change in humidity. Neon indicator and pull cord override.

W89mm x H89mm x D54mm* 5 amps

Code	Price
ANC808A	£ 147 .29

Overrun Timer Switch

Adjustable time delay between 2-25 minutes after the light switch has been turned off. W89mm x H89mm x D54mm* 5 amps

Code	Price
ANC108A	£ 74 .89

Duct Mounted Humidistat with Remote Sensor and Overrun Timer Switch

More sensitive than traditional humidistat controls, Intelligent Humidity Control (IHC) identifies a significant change in humidity. Timer adjustable between 2-25 minutes. W89mm x H89mm x D54mm* 5 amps

Code	Price
ANC846A	£ 174 .99

Two Speed Rocker Switch

Provides two speed operation for twin speed fans.

W89mm x H89mm x D54mm* 5 amps

Code	Price
ANC812A	£ 87 .21

^{*}Includes 35mm surface mounted pattress box (supplied).

Section 6 Duct Systems

Our Domus range offers the most comprehensive selection of high quality plastic ducting available in the industry. The range includes six profile sizes of rigid ducting to allow customers to select the most suitable system based on the dwelling type and installation requirements.

Rigid Duct Overview

As a branch based system, rigid duct is ideal for new build or for where space isn't restricted and can be used with MVHR, MEV, dMEV or intermittent extract.

Our market leading Domus rigid duct range is available in 6 different profiles to suit any application and comes with a full set of adapters to enable a simple or complex system as required.

Designed to offer high levels of air tightness and system efficiency, Domus rigid duct systems are also supported by patented duct insulation, fire stopping & sound attenuation components as shown in


Unique to the range are our high efficiency duct bends, designed to reduce duct resistance and overall system energy usage, in addition to innovative flow control plenums, engineered to allow connection to a range of stylish architectural grilles. Read more on page 82.





54 www.domusventilation.co.uk

Rigid Duct Systems Duct Range

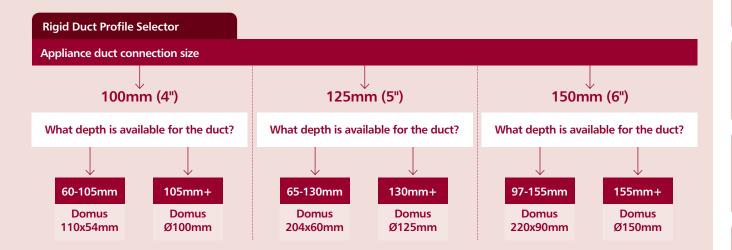

When a profile has been specified and the duct layout designed, the system resistance must be calculated to ensure that the appliance has sufficient power to more than match the resistance of the complete system.

See pages 56-89 to select the relevant components.

Suitable Application						
	Size	Range	Free Area	Application		
Rectangular						
	110x54mm	System 100	5,300mm ²	Bathroom, toilet, utility room and kitchen		
	204x60mm	Supertube	11,200mm ²	Bathroom, toilet, utility room, kitchen and whole house		
No.	220x90mm	Megaduct	17,968mm²	Kitchen, commercial and whole house		
Round						
	Ø100mm	EasiPipe 100	7,850mm ²	Bathroom, toilet and utility room		
	Ø125mm	EasiPipe 125	12,266mm ²	Bathroom, toilet, utility room, kitchen and whole house		
	Ø150mm	EasiPipe 150	17,263mm ²	Kitchen, commercial and whole house		



Where components are listed with one of three connection profiles; Male, Female or Duct.



Male: The fitting will fit inside duct.



Female: The fitting will fit around duct.



Duct: The connection profile is the same as the duct and may need a Female or Male straight connector to couple to duct.

Where fittings are available in different colours:



Colour	RAL Reference and Title			
O White	Traffic White	RAL 9016		
Brown	Nut Brown	RAL 8011		
Cotswold	lvory	RAL 1014		
Terracotta	Copper Brown	RAL 8004		
Black	Traffic Black	RAL 9017		







Duct									
Description	Code		Connection	Code		Connection	Code		Connection
Duct - 1m	Boxed	Retail Pack		Boxed	Retail Pack		Boxed	Retail Pack	
Duct - IIII	DD010	40010	Duct	_ 510	50510	Duct	910	NI/A	Duct
	£ 6 .02	£ 7 .13	Duct	£ 12 .44	£ 14 .32	Duct	£ 19 .93	N/A	Duct
The same of the sa	10.02	17.13		-12.44	- 14.52		119.93		
Duct - 1.5m		1							T
	DD015	N/A	Duct	515	N/A	Duct	915	N/A	Duct
	£ 9 .04			£18.65			£29.95		
Duct - 2m		1	1						<u> </u>
	D1-2000	N/A	Duct	D3-2000	N/A	Duct	D4-2000	N/A	Duct
	£ 12 .04			£ 24 .84			£40.26		
D 1 C 1									
Duct - Connecto		40020	Famala		F0F20		020	N1/A	
No. of	DD020	40020	Female	520	50520	Female	920	N/A	Female
	£2.24	£ 2 .92		£ 7 .32	£ 8 .39		£ 8 .40		
Duct - Connecto	r - Straight - D	Damper							т.
No. of	DD027	N/A	Female	527	N/A	Female	927	N/A	Female
	£ 3 .37			£ 9 .23			£10.60		
Duct - Connecto	r - Universal	<u>- </u>			<u>' </u>			•	
	N/A	N/A	N/A	-	N/A	Male	N/A	N/A	N/A
				£ 21 .39					
D 1 11 1 E((;)									
Duct - High Effici					N1/A		050.61	N1/A	
	N/A	N/A	N/A	550-GL	N/A	Female	950-GL	N/A	Female
				£32.67			£3 7 .27		
For more information,	see page 83.			_					
Duct - Bend - Ho			I		1	T			
	DD050	40050	Female	550	50550	Female	950	N/A	Female
	£ 5 .52	£6.74		£15.23	£ 17 .52		£ 17 .53		
Duct - Bend - Ho	rizontal 45°	1			1	<u> </u>		<u> </u>	1
	DD055	40055	Female	555	50555	Female	955	N/A	Female
	£ 4 .97	£ 5 .92		£13.69	£ 17 .10		£15.77		
Dust Road Ho	rizontal Adio								
Duct - Bend - Ho	N/A	N/A	N/A	<u></u>	N/A	Male/Female	N/A	N/A	N/A
	IN/A	11//	IN/A			iviale/Terriale		IV/A	IN/A
				£15.23					
Duct - T Piece - H	lorizontal	1							1
	DD080	40080	Female	582	50582	Female	982	N/A	Female
	£ 7 .86	£ 9 .23		£21.53	£ 24 .77		£27.51		
								•	

Rigid Duct Systems







Connection

Rectangular Range

Duct									
Description	Code		Connection	Code		Connection	Code		
	Boxed	Retail Pack		Boxed	Retail Pack	ζ	Boxed	Retail Pack	
Duct - Bend - Ve	ertical 90°								
100	DD060	40060	Female	560	50560	Female	960	N/A	
	£ 5 .52	£6.74		£ 11 .15	£12.80		£13.93		
Duct - Bend - Ve	ertical 45°		1		'	·		'	İ
	DD075	40075	Female	575	50575	Female	975	N/A	
	£ 4 .97	£ 5 .92		£ 9 .99	£12.47		£12.55		
Duct - End Cap			1			-			İ
1	DD018	N/A	Male	518	N/A	Male	N/A	N/A	
	£ 2 .92			£3.59					
Duct - Wall Plate	e - White		1		'	<u>'</u>		,	
	115-4	40115	N/A	115-5W	N/A	N/A	115-6	N/A	
	£ 1 .82	£ 2 .44		£2.55			£2.74		
Duct - Wall Plate	e - Brown	1	1		i	1		i	Ė
	N/A	N/A	N/A	115-5B	N/A	N/A	N/A	N/A	
				£ 2 .55					
Duct - Wall Plate	e - Cotswold		1			1		·	İ
	N/A	N/A	N/A	115-5C	N/A	N/A	N/A	N/A	
				£2.81					
Duct - Wall Plate	e - Terracotta	· · · · · · · · · · · · · · · · · · ·						I	
	N/A	N/A	N/A	115-5T	N/A	N/A	N/A	N/A	
				£2.55					
					•		.		

560	50560	Female	960	N/A	Female
£ 11 .15	£12.80		£13.93	2	
	<u>'</u>	<u>'</u>		•	
575	50575	Female	975	N/A	Female
£ 9 .99	£12.47		£12.55		
 518	N/A	Male		N/A	N/A
£ 3 .59					
115-5W	N/A	N/A	115-6	N/A	N/A
£ 2 .55			£2.74		
	1	1			1
115-5B £ 2 .55	N/A	N/A	N/A	N/A	N/A
115-5C	N/A	N/A	N/A	N/A	N/A
£ 2 .81					
115-5T	N/A	N/A	N/A	N/A	N/A
£ 2 .55					

Description	Code	Connection	
	Boxed Retail Pack		
Duct Clip			
1	122-4	40122	N/A
	£ 1 .42	£3.44	
Duct Clip		•	'
J	N/A	N/A	N/A

C
N/A
NI/A
N/A

Code		Connection
Boxed	Retail Pa	nck
N/A	N/A	N/A
922*	N/A	N/A
£1.28		

^{*}Two components per fitting required







Duct Insulat	ion								
Description	Code		Connection	Code		Connection	Code		Connection
	Boxed	Retail Pack		Boxed	Retail Pack		Boxed	Retail Pack	
Thermal Duct Ins	sulation - 1m			Outside Di	mension 252x10	8mm	Outside Di	imension 268x13	38mm
	N/A	N/A	N/A	TS510	N/A	N/A	TS910	N/A	N/A
				£ 7 .23			£ 9 .41		
Thermal Duct In:	sulation - Hor	izontal 90° Ben	ıd						
	N/A	N/A	N/A	TS550	N/A	N/A	TS950	N/A	N/A
				£ 4 .55			£ 5 .91		
Thermal Duct In:	sulation - Hor	izontal 45° Ben	d						
6	N/A	N/A	N/A	TS555	N/A	N/A	TS955	N/A	N/A
				£ 3 .64			£4.72		
Thermal Duct In:	sulation - Hor	izontal T Piece							
	N/A	N/A	N/A	TS582	N/A	N/A	TS982	N/A	N/A
				£6.67			£ 8 .69		
Thermal Duct In:	sulation - Ver	tical 45° Bend	I						
	N/A	N/A	N/A	TS575	N/A	N/A	TS975	N/A	N/A
				£ 2 .93			£3.81		
Thermal Duct In:	sulation - Fixe	ed Spigot Ø125r	nm Plenum						
	N/A	N/A	N/A	TS540	N/A	N/A	TS961	N/A	N/A
				£ 4 .54			£ 5 .90		
PVC Coated - Ste	eel Fastening	Strap - 10m Rol	I - White						
dillo	N/A	N/A	N/A	TS22	N/A	N/A	TS22	N/A	N/A
	N			£18.08			£18.08		
-									

LABC

The Domus Thermal range complies with Building Regulations and is LABC registered, for more information, see page 86.

Insulation - Sheet - 1m x 1.2m				
10TP12	N/A	N/A	10TP12	N/A
£17.19			£ 17 .19	
Insulation sheet does not form part of the D	Domus Thermal ra	nge. For further informa	ation on regulation	complia

10TP12	N/A	N/A
£ 17 .19		

liance, please call us on 03443 715523.

Duct Sound Attenuation					
Description	Code	Connection			
	Boxed	Retail Pag	:k		
Duct - Sound At	tenuators - N	1icroban - 0.5	m		
+	N/A	N/A	N/A		

Code	Connection	
Boxed	Retail Pack	
5SL-500	N/A	Duct
£ 97 .68		

N/A

Code	Connection	
Boxed	Retail Pack	
9SL-500	N/A	Duct
£154.87		

Join more than one 0.5m length sound attenuator, for a longer duct run. For more information on Domus Sound Attenuators, see page 84.

Microban

Rigid Duct Systems







Rectangular Range

Fire Compartment Integrity		
Code		Connection
Boxed	Retail Pack	
- Horizontal		
N/A	N/A	N/A
ontal	•	
DFS110	N/A	Female
£ 7 .48		Up to 120min fire resistance
	Code Boxed - Horizontal N/A ontal DFS110	Code Boxed Retail Pack - Horizontal N/A N/A ontal DFS110 N/A

Code		Connection	Code	
Boxed	Retail Pack		Boxed	F
FBS20460H	N/A	Female	FB22090H	١
£26.46		Up to 120min fire resistance	£43.87	
DFS204	N/A	Female	DFS220	١
£12.74		Up to 90min fire resistance	£19.46	

Code		Connection	
Boxed	Retail Pack		
FB22090H	N/A	Female	
£43.87		Up to 120min fire resistance	
DFS220	N/A	Female	
£19.46		Up to 60min fire resistance	

For more information on Domus fire stopping solutions, see page 88. For intumescent, fire resistant sealant, DDSEAL, see page 73.

Flexible Hose			
Description	Code		Connection
	Boxed	Retail Pack	
Hose - 0.5m			
	3305	40335	Female
	£ 4 .92	£5.01	
Hose - 3m			
	333	N/A	Female
	£ 14 .40		

Code		Connection
Boxed	Retail Pack	
5305	N/A	Female
£5.64		
533	N/A	Female
£ 24 .75		

Retail Pack	
N/A	Female
N/A	Female
	N/A

Flexible Hose Connectors			
Description	Code		Connection
	Boxed	Retail Pack	
Hose - Connecto	or - 0.1m		
	381	N/A	Duct
	£ 1 .61		
Hose - Connecto	or - 0.14m	,	
	N/A	N/A	N/A

Code		Connection
Boxed	Retail Pa	ck
581	N/A	Duct
£3.65		
N/A	N/A	N/A

Code		Connection
Boxed	Retail P	ack
N/A	N/A	N/A
	8 8 9 8 9 8	
004	N1/A	5 .
981	N/A	Duct
£6.97		

Internal Duct	Terminal	s	
Description	Code		Connection
	Boxed	Retail Pack	
Air Valve - Adapte	r - Flow Contr	rol - For Single Fi	x Commissioning
	N/A	N/A	N/A
For more information, s	ee page 82.		
Air Valve - Adapte	er		
	DD040	N/A	Female/Male
1	£ 5 .52		

Code		Connection	
Boxed	Retail Pack		
540-FC	N/A	Female/Male	
£43.73			
540	N/A	Female/Male	
£10.11			

Code		Connection
Boxed	Retail Pack	
N/A	N/A	N/A
		1
961	N/A	Female/Male
£ 14 .53		







External Wa	ll Duct Te	rminals							
Description	Code		Connection	Code		Connection	Code		Connection
	Boxed	Retail Pa		Boxed	Retail Pack		Boxed	Retail Pack	
Outlet - Airbrick	- Adapter - 1	10x54-204x6	50mm		1				
	DD077	40077	Duct/Male	N/A	N/A	N/A	N/A	N/A	N/A
1	£ 3 .93	£ 4 .72							
Typically installed with	a 505 or 501 or	55015.							
Outlet - Airbrick	- White - H7	0xW210xD62	 2mm						l .
	N/A	N/A	N/A	505W	N/A	Female	N/A	N/A	N/A
				£ 7 .22					
0 11 1 11 11		70 14/240 D.G					-		
Outlet - Airbrick	-				1		-		1
	N/A	N/A	N/A	505B	N/A	Female	N/A	N/A	N/A
				£ 7 .22					
Outlet - Airbrick	- Cotswold -	H70xW210x	D62mm		'			'	
	N/A	N/A	N/A	505C	N/A	Female	N/A	N/A	N/A
				£ 7 .96					
Outlet - Airbrick	Torracotta	⊔70√\\/210\	/D62mm				-		
Outlet - Allbrick	N/A	N/A	N/A	- 505T	N/A	Female	N/A	N/A	N/A
	IN/A	IVA	IN/A		IN/A	гептате	IN/A	IN/A	IN/A
				£ 7 .22					
Outlet - Airbrick	- Black - H70)xW210xD62ı	mm						
	N/A	N/A	N/A	505BK	N/A	Female	N/A	N/A	N/A
				£ 7 .22					
Outlet - Airbrick	- Damper - V	White - H69x\	W210xD56mm						
	N/A	N/A	N/A	501W	N/A	Male	N/A	N/A	N/A
The same of	•	,		£6.21			,	,	,
		# # # # # # # # # # # # # # # # # # #							
Outlet - Airbrick							_		1
	N/A	N/A	N/A	501B	N/A	Male	N/A	N/A	N/A
				£6.21					
Outlet - Airbrick	- Damper - C	Cotswold - H6	59xW210xD56mm					-	1
	N/A	N/A	N/A	501C	N/A	Male	N/A	N/A	N/A
				£6.83					
Outlet Aids 1	Damestra	Tanna aatta 11	CO-14/210-DEC-						
Outlet - Airbrick		1	69xW210xD56mm	_	NI/A	N.4-1-		N1/A	1
	N/A	N/A	N/A	501T	N/A	Male	N/A	N/A	N/A
				£6.21					
			1	-	1	1	- 1	1	1







External Wa	ll Duct Ter	rminals							
Description	Code		Connection	Code		Connection	Code		Connection
	Boxed	Retail Pa	ck	Boxed	Retail Pack		Boxed	Retail Pack	3
Outlet - Airbrick -	Damper - Wall	Plate - White	- H69xW210xD56mm	1					
	N/A	N/A	N/A	N/A	55015W £ 10 .95	Male	N/A	N/A	N/A
Outlet - Airbrick -	Damper - Wall	Plate - Brown	- H69xW210xD56mm	1		'		·	'
	N/A	N/A	N/A	N/A	55015B £ 10 .95	Male	N/A	N/A	N/A
Outlet - Airbrick	- Adapter - 2	.04x60-220x9	90mm			I			1
	N/A	N/A	N/A	957 £ 5 .92	N/A	Male/Female	N/A	N/A	N/A
Typically installed with	a 977 and 905.								
Outlet - Double	Airbrick - Ada	apter							
	N/A	N/A	N/A	N/A	N/A	N/A	977 £ 5 .92	N/A	Female/Male
Typically installed with	a 905 and if ada	pting from 204x6	0mm, a 957.				.		
Outlet - Airbrick	- Double - W	/hite - H140x\	W250xD75mm						
	N/A	N/A	N/A	N/A	N/A	N/A	905W £11 .90	905WX2R £ 27 .38	Female
Typically installed with	a 977 and if ada	pting from 204x6	0mm, a 957.						
Outlet - Airbrick	- Double - Br	rown - H140x	:W250xD75mm						
	N/A	N/A	N/A	N/A	N/A	N/A	905B £ 11 .90	905BX2R £ 27 .38	Female
Typically installed with	a 977 and if ada	pting from 204x6	0mm, a 957.	_			.		
Outlet - Airbrick	- Double - Co	otswold - H14	40xW250xD75mm						
	N/A	N/A	N/A	N/A	N/A	N/A	905C £ 13 .10	905CX2R £ 30 .13	Female
Typically installed with	a 977 and if ada	pting from 204x6	0mm, a 957.						
Outlet - Airbrick	- Double - Te	erracotta - H1	40xW250xD75mm						
Tunically installed with	N/A	N/A	N/A	N/A	N/A	N/A	905T £ 11 .90	905TX2R £ 27 .38	Female
Typically installed with	a 9// and if ada	pung trom 204x6	UIIIN, a 95/.	_			.		







External Wa		minals	,						
Description	Code		Connection	Code		Connection	Code		Connection
	Boxed	Retail Pack	1	Boxed	Retail Pack		Boxed	Retail Pack	
Outlet - Gravity	Flaps - White	- H155xW155x[D30mm						
	4901W	44910W*	Male	N/A	N/A	N/A	N/A	N/A	N/A
	£ 4 .12	£5.42							
Outlet - Gravity	Flaps - Brown	- H155xW155x	D30mm		,	1			1
	4901B	44910B*	Male	N/A	N/A	N/A	N/A	N/A	N/A
	£ 4 .12	£ 5 .42							
Outlet - Gravity	Flaps - Cotswo	old - H155xW15	55xD30mm			I			
	4901C	N/A	Male	N/A	N/A	N/A	N/A	N/A	N/A
	£ 4 .93								
Outlet - Gravity	Flaps - Terraco	otta - H155xW1	55xD30mm						
	4901T	44910T*	Male		N/A	N/A	N/A	N/A	N/A
	£ 4 .47	£ 5 .42							
Outlet - Cowled	Damper - Wh	nite - H155xW15	55xD100mm		-	I			
	4903W	44932W*	Male	N/A	N/A	N/A	N/A	N/A	N/A
	£6.02	£ 7 .51							
Outlet - Cowled	Damper - Bro	own - H155xW1	55xD100mm			I			
	4903B	44932B*	Male	N/A	N/A	N/A	N/A	N/A	N/A
	£6.02	£ 7 .51							
Outlet - Louvere	ed Grille - Whi	te - H155xW155	5xD40mm		**	<u> </u>			
	4905W	N/A	Male	N/A	N/A	N/A	N/A	N/A	N/A
	£ 4 .93								
Outlet - Louvere	ed Grille - Brov	vn - H155xW15	5xD40mm						
	4905B	N/A	Male	N/A	N/A	N/A	N/A	N/A	N/A
	£ 5 .34								
Outlet - Louvere	ed Grille - Cots	swold - H155xW	<u> </u> /155xD40mm						
	4905C	N/A	Male	N/A	N/A	N/A	N/A	N/A	N/A
45	£ 5 .86								
Outlet - Louvere	ed Grille - Terra	acotta - H155xV	V155xD40mm			1			
	4905T	N/A	Male	N/A	N/A	N/A	N/A	N/A	N/A
	£ 5 .34								
	£ 5 .34	V-1							

^{*}Rectangular and round connections – fit directly to either 110x54mm or Ø100mm systems.







External Wa	ll Duct Terr	ninals					
Description	Code		Connection	Code		Connection	[
	Boxed	Retail Pack		Boxed	Retail Pack		В
Outlet - Louvered	l Grille - Flyscree	n - White - H15	5xW155xD40mm				
	F4905W	44954W*	Male	N/A	N/A	N/A	N
	£ 5 .64	£ 7 .04					
Outlet - Louvered	I Grille - Flyscree	n - Brown - H15	5xW155xD40mm			<u>I</u>	
	F4905B	44954B*	Male	N/A	N/A	N/A	N
	£ 5 .64	£ 7 .04					
Outlet - Louvered	Grille - Flyscreen	- Cotswold - H15	55xW155xD40mm		'	'	
1	F4905C	N/A	Male	N/A	N/A	N/A	N,
	£6.20						

Code				
Retail Pack				
N/A	N/A			
	I			
N/A	N/A			
NI/A	NI/A			
IN/A	N/A			
	N/A			

^{*}Rectangular and round connections – fit directly to either 110x54mm or Ø100mm systems.









Duct									
Description	Code		Connection	Code		Connection	Code		Connection
	Boxed	Retail Pag	ck	Boxed	Retail Pa	ck	Boxed	Retail Pac	k
Duct - 0.25-0.45	im - Telescopi	ic Assembly							
	130-4	N/A	N/A	130-5	N/A	N/A	130-6	N/A	N/A
The same of the sa	£ 14 .12			£ 19 .40			£23.44		
Duct - 0.35m	'	'	1		<u>'</u>			·	<u>'</u>
	135-4	40135	Duct	135-5	50135	Duct	135-6	N/A	Duct
The same of the sa	£3.41	£6.22		£6.92	£ 8 .61		£ 9 .81		
Duct - 1m	1	'	*		'	1			1
	1100-4	41100	Duct	1100-5	51100	Duct	1100-6	N/A	Duct
	£10.01	£ 11 .61		£ 12 .25	£15.28		£15.23		
Duct - 1m - Slee	ve	- 1	1			i		'	-1
	2100-4	N/A	N/A	2100-5	N/A	N/A	2100-6	N/A	N/A
The same of the sa	£11.22			£13.87			£16.89		
Duct - 2m		-1	'			1			-
	1200-4	N/A	Duct	1200-5	N/A	Duct	1200-6	N/A	Duct
	£ 17 .63			£21.75			£ 27 .23		
Duct - Connecto	r - Straight	'	*		'	,		·	'
0	493	40493	Male	593	50593	Male	693	N/A	Male
	£ 4 .03	£4.72		£ 4 .62	£ 5 .33		£ 5 .64		
Duct - Connecto	r - Straight - [Damper	'		'	-			<u>'</u>
	494	40494	Male	594	50594	Male	694	N/A	Male
	£6.42	£ 7 .43		£ 7 .47	£ 9 .34		£ 8 .81		
Duct - Connecto	r - Straight - [Damper & Wa	all Plate		<u>.</u>				
	495	N/A	Male	595	N/A	Male	695	N/A	Male
	£ 7 .64			£10.65			£10.63		
Duct - Bend - Ho	orizontal 90°								
	490	40490	Male	590	50590	Male	690	N/A	Male
1	£ 7 .32	£ 8 .51		£ 12 .25	£ 14 .08		£15.23		
Duct - Bend - Ho	orizontal 45°	·				•		·	
	491	40491	Male	591	50591	Male	691	N/A	Male
	£6.35	£ 7 .43		£10.11	£ 12 .64		£28.50		
Duct - T Piece - F	Horizontal						_		
	492	40492	Male	592	50592	Male	692	N/A	Male
	£ 14 .23	£15.63		£16.53	£20.60		£31.93		

Connection

N/A

Male

N/A

Rigid Duct Systems Round Range







Duct								
Description	Code	Connection						
	Boxed	Retail Pack						
Duct - Y Piece								
ATT THE REAL PROPERTY.	499	N/A	Male					
	£ 17 .08							
Duct - Y Piece - Wh	nite Metal							
	N/A	N/A	N/A					
Duct - Wall Plate								
	114-4	40114	N/A					
Y	£ 2 .61	£2.55						

Code		Connection	Code			
Boxed	Retail Pack		Boxed	Retail Pack		
N/A	N/A	N/A	N/A	N/A		
599M	N/A	Male	699M	N/A		
£20.51			£33.58			
				<u> </u>		
	1		-	1		
114-5	N/A	N/A	114-6	N/A		
£2.46			£3.04			
				•		

Duct Fixings								
Description	Code	Code						
	Boxed	Retail Pack						
Duct Clip								
	496	40496	N/A					
	£2.26	£ 5 .66						

Code		Connection
Boxed	Retail Pac	k
596	50596	N/A
£2.46	£6.10	

Code		Connection
Boxed	Retail Pa	ack
696	N/A	N/A
£2.68		


Condensation Control									
Description	Code	Connection							
	Boxed	Retail Pack							
Duct - Condensati	Duct - Condensation Trap with Overflow								
	497	40497	Male/Female						
4. 3	£12.72	£ 15 .25							


Code	Connection	
Boxed	Retail Pack	
5697	N/A	Male/Female
£38.85		


Code	Connection	
Boxed	Retail Pack	
5697	N/A	Male/Female
£ 38 .85		

Condensation Trap Pipe Combinations







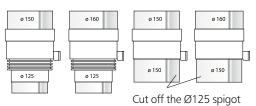

All dimensions shown in mm.

Note: 125mm installations - exit the trap using 150mm ventilation pipe or 160mm soil pipe in order to reduce air flow resistance.







Duct Insulat	ion								
Description	Code		Connection	Code		Connection	Code		Connection
	Boxed	Retail Pack		Boxed	Retail Pack	4	Boxed	Retail Pack	4
Thermal Duct Ins	sulation - 1m -	Outside Dime	nsion Ø146mm	Outside Dir	mension Ø171r	nm	Outside Dir	mension Ø197r	nm
	TS1100-4	N/A	N/A	TS1100-5	N/A	N/A	TS1100-6	N/A	N/A
	£ 5 .64			£ 7 .23			£ 7 .80		
Thermal Horizon	ital 90° Bend D	Duct Insulation	<u>'</u>		·	ı			ı
6 6	TS490	N/A	N/A	TS590	N/A	N/A	TS690	N/A	N/A
	£ 4 .15			£ 4 .55			£ 5 .66		
Thermal Horizon	ital 45° Bend D	ouct Insulation				ı		'	1
8 6	TS491	N/A	N/A	TS591	N/A	N/A	TS691	N/A	N/A
W	£ 3 .95			£3.64			£ 4 .75		
Thermal Horizon	ital T Piece Duc	t Insulation			·				
	TS492	N/A	N/A	TS592	N/A	N/A	TS692	N/A	N/A
	£ 4 .93			£6.67			£13.11		
PVC Coated - Ste	eel Fastening St	trap - 10m Ro	l - White		'	1		'	1
	TS22	N/A	N/A	TS22	N/A	N/A	TS22	N/A	N/A
	£18.08			£18.08			£18.08		



The Domus Thermal range complies with Building Regulations and is LABC registered, for more information, see page 86.

Insulation - Sheet - 1m x 1.2m								
10TP12	N/A	N/A	10TP12	N/A	N/A	10TP12	N/A	N/A
£ 17 .19			£ 17 .19			£ 17 .19		

Insulation sheet does not form part of the Domus Thermal range. For further information on regulation compliance, please call us on 03443 715523.

Fire Compar	tment Inte	grity							
Description	Code		Connection	Code		Connection	Code		Connection
	Boxed	Retail Pack		Boxed	Retail Pack		Boxed	Retail Pack	
FireBrake+ Sleev	ve - Horizontal								
	FBS100H	N/A	Female	FBS125H	N/A	Female	FBS150H	N/A	Female
	£30.66		Up to 120min fire resistance	£43.07		Up to 120min fire resistance	£71.12		Up to 120min fire resistance
Fire Sleeve - Hor	izontal								
	N/A	N/A	N/A	DFS125	N/A	Female	N/A	N/A	N/A
				£ 21 .89		Up to 90min fire resistance			
Fire Sleeve - Ver	tical								
	N/A	N/A	N/A	DFSV125	N/A	Female	DFSV150	N/A	Female
11 (2)				£12.29		Up to 240min fire resistance	£ 17 .70		Up to 60min fire resistance

For more information on Domus fire stopping solutions, see page 88. For intumescent, fire resistant sealant, DDSEAL, see page 73.







Flexible Hose									
Description	Code		Connection	Code		Connection	Code		Connection
	Boxed	Retail Pack		Boxed	Retail Pack		Boxed	Retail Pack	
Hose - 1m									
	361	40361	Female	561	50561	Female	661	N/A	Female
	£2.88	£3.55		£ 3 .98	£ 4 .56		£ 4 .76		
Hose - 3m			1			<u> </u>		<u> </u>	I.
1000	363	40363	Female	563	50563	Female	663	N/A	Female
The state of the s	£ 4 .94	£ 8 .87		£ 11 .18	£ 12 .85		£24.86		
Hose - 6m	,	1	1		,	'		;	i
	366	N/A	Female	566	N/A	Female	666	N/A	Female
TO LOT	£ 9 .57			£ 21 .94			£ 24 .86		
Hose - 15m	<u> </u>		<u> </u>			1			1
	3615	N/A	Female	5615	N/A	Female	6615	N/A	Female
10	£40.68			£ 57 .18			£69.11		
Hose - 45m	<u>'</u>	<u>'</u>	'						<u>'</u>
	3645 £ 76 .99	N/A	Female	N/A	N/A	N/A	N/A	N/A	N/A
100									
Hose - Insulated	- 10m	-	1			1			1
Co. Little	4210	N/A	Female	5210	N/A	Female	6210	N/A	Female
	£62.63			£132.99			£150.76	5	
Aluminium/Poly	ester Hose - 3	Bm				1			<u> </u>
SALAR	3133	N/A	Female	5133	N/A	Female	6133	N/A	Female
	£ 1 .95			£2.42			£2.95		
Aluminium/Poly	ester Hose - 6	5m				<u> </u>			I
5000	3136	N/A	Female	5136	N/A	Female	6136	N/A	Female
	£ 3 .92			£ 4 .86			£ 5 .88		
Aluminium/Poly	ester Hose - 1	0m				•		·	
A LAND	N/A	N/A	N/A	51310 £ 7 .37	N/A	Female	N/A	N/A	N/A







Description	Code		Connection			
•	Boxed	Boxed Retail Pack				
Hose - Connector - 0.1m						
	380	N/A	Male			
	£ 2 .12					
Hose - Connecto	or - Threaded	- Socket	'			
	126-4	40126	Female			
	£ 1 .83	£2.41				
Hose - Connecto	or - Threaded	- Spigot	'			
100	124-4	40124	Male			
	£ 1 .76	£ 2 .31				

Code	Connection	
Boxed	Retail Pack	
580	N/A	Male
£2.54		
		I
126-5	50126	Female
£2.46	£ 3 .19	
N/A	N/A	N/A

Code		Connection
Boxed	Retail Pack	
680	N/A	Male
£2.77		
	'	
126-6	N/A	Female
£ 3 .36		
N/A	N/A	N/A

Description	Code		Connection
-	Boxed	Retail Pack	
Aluminium Duct	- 0.3m		
	403203	N/A	Female
	£ 3 .85		
Aluminium Duct	- 1.5m	1	
	403215	N/A	Female
0	£10.35		
Aluminium Duct	- 3m	•	
	403230	N/A	Female
0	£18.75		
Aluminium Duct	Clip	•	
	127-4	40127	N/A
	£ 1 .66	£ 4 .24	

Code		Connection
Boxed	Retail Pack	
503203	N/A	Female
£5.07		
	i	
503215	N/A	Female
£13.90		
503230	N/A	Female
£23.61		
127-5	50127	N/A
£ 2 .72	£6.23	

Code	Connection	
Boxed	Retail Pack	
603203	N/A	Female
£ 5 .49		
603215	N/A	Female
£18.39		
	1	I .
603230	N/A	Female
£30.03		
	1	
127-6	N/A	N/A
£3.21		

Description	Code		Connection		
	Boxed	Retail Pack			
Hose Clip					
	125-4	40125	90-110mm		
Q	£ 1 .76	£ 3 .93			
Hose Clip - Univ	ersal	'			
\cap	125-UNI	N/A	65-215mm		
\bigcirc	£ 4 .03				

Retail Pack 50125	00.110
50125	00.110
50125	00 110
30123	90-110mm
£ 5 .63	
NI/A	65-215mm
N/A	05-215111111

Code		Connection
Boxed	Retail Pack	
125-6	N/A	90-110mm
£ 3 .36		
	-	
125-UNI	N/A	65-215mm
£ 4 .03		







Description	Code		Connection	Code		Connection	Code		Connection
	Boxed	Retail Pack		Boxed	Retail Pack		Boxed	Retail Pack	
Air Valve - Extra	ct or Supply								
	136-04	N/A	Male	136-05	N/A	Male	136-06	N/A	Male
	£10.70			£12.88			£ 17 .19		
Air Valve - Extra	ct or Supply - Su	ıspended Ceil	ling		1	ı		1	ı
	136-24	40136	Male	136-25	50136	Male	136-26	N/A	Male
	£ 17 .19	£18.13		£19.36	£ 24 .16		£25.75		
Air Valve - Extra	ct or Supply - Su	ıspended Ceil	ling - Fire Rated		1			1	<u> </u>
60	136FR-24M	N/A	Male	136FR-25M	N/A	Male	136FR-26M	N/A	Male
	£108.25			£ 111 .38			£152.34		

Description	Code		Connection	Code		Connection	Code		Connection
	Boxed	Retail Pack		Boxed	Retail Pack		Boxed	Retail Pack	
Diffuser - Multi-	Directional - E	nvironment Filt	er - White						
	4908F £ 44 .06	N/A	Male	N/A	N/A	N/A	N/A	N/A	N/A
Accessory: Spar	e Environmen	tal Filter	<u> </u>		<u> </u>				
	40AF £ 15 .17	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Accessory: Polle	n Filter								
	40AFP £15 .17	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Diffuser - Round	d - White	<u>'</u>	1						
0	4907W £ 5 .37	N/A	Male	5907W £ 9 .01	55907W £ 11 .22	Male	N/A £ 10 .27	N/A	N/A
Diffuser - Round	d - Chrome								
	4907CH £ 18 .42	N/A	Male	N/A	N/A	N/A	N/A	N/A	N/A
Architectural Gr	ille - Silver								
	N/A	N/A	N/A	ART125-CF1S £ 18 .30	N/A	N/A	6907W	N/A	Male
Architectural Gr	ille - Brushed	Metal	1			<u> </u>			
	N/A	N/A	N/A	ART125-CF1BM £ 18 .30	N/A	N/A	N/A	N/A	N/A







Internal Duc	ct Termina	ls							
Description	Code		Connection	Code		Connection	Code		Connection
	Boxed	Retail Pack		Boxed	Retail Pack		Boxed	Retail Pack	
Architectural Gr	ille - White								
	N/A	N/A	N/A	ART125-SD2W	N/A	N/A	N/A	N/A	N/A
1				£ 12 .75					
Architectural Gr	ille - Silver - Ir	ndent							
	N/A	N/A	N/A	ART125-SD1W	N/A	N/A	N/A	N/A	N/A
100				£18.30					
Architectural Gr	ille - White - I	ndent							ı
	N/A	N/A	N/A	ART125-CD1W	N/A	N/A	N/A	N/A	N/A
1				£12.75					
Architectural Gr	rille - White		i		I	I.			
1	N/A	N/A	N/A	ART125-SD2W	N/A	N/A	N/A	N/A	N/A
/ Milliamor				£12.75					
Architectural Gr	ille - White		<u>I</u>		I	<u>I</u>			
/in	N/A	N/A	N/A	ART125-SD1W	N/A	N/A	N/A	N/A	N/A
11111				£ 12 .75					
Architectural Gr	ille - White		<u>I</u>		I	I			
	N/A	N/A	N/A	ART125-CD1W	N/A	N/A	N/A	N/A	N/A
(((((======)))				£12.75					
							_		

Description	Code		Connection	Code		Connection
•	Boxed	Retail Pack	ck Boxed Retail Pack			
Outlet - Gravity	Flaps - White	- H155xW155x	D30mm			
	4900W	44910W*	Male	5900W	55900W	Male
	£ 3 .13	£ 5 .42		£ 9 .23	£10.60	
Outlet - Gravity	Flaps - Brown	- H155xW155	kD30mm		I	I
	4900B	44910B*	Male	5900B	55900B	Male
	£ 3 .13	£ 5 .42		£ 9 .23	£10.60	
Outlet - Gravity	Flaps - Cotswo	old - H155xW1	55xD30mm		'	
	4900C	N/A	Male	5900C	N/A	Male
	£3.44			£10.17		
Outlet - Gravity	Flaps - Terraco	otta - H155xW	155xD30mm		1	1
	4900T	44910T*	Male	5900T	N/A	Male
	£ 3 .13	£ 5 .42		£ 9 .23		

Code		Connection
Boxed	Retail Pack	
6900W	N/A	Male
£ 8 .18		
6900B	N/A	Male
£ 8 .18		
6900C	N/A	Male
£ 9 .01		
6900T	N/A	Male
£ 8 .18		

^{*}Rectangular and round connections – fit directly to either 110x54mm or Ø100mm systems.







External Wal	l Duct Tern	ninals							
Description	Code		Connection	Code	***************************************	Connection	Code		Connection
	Boxed	Retail Pack		Boxed	Retail Pack		Boxed	Retail Pack	
Outlet - Gravity F	laps - Black - H	H155xW155xD	30mm						
	4900BK	44900BK	Male	N/A	N/A	N/A	N/A	N/A	N/A
	£3.03	£3.57							
Outlet - Cowled -	- Damper - Wh	hite - H155xW	155xD100mm						
-	4902W	44932W*	Male	5902W	55902W	Male	6902W	N/A	Male
/ /	£ 5 .83	£ 7 .51		£ 11 .73	£ 14 .61		£13.02		
				•••					
Outlet - Cowled -	1	1	I		*		_		
	4902B	44932B*	Male	5902B	55902B	Male	6902B	N/A	Male
	£ 5 .83	£ 7 .51		£11.73	£ 14 .61		£13.02		
Outlet - Cowled -	Damper - Cot	tswold - H155	: \W155xD100mm						
	4902C	N/A	Male	5902C	N/A	Male	6902C	N/A	Male
1.7	£ 6 .87			£12.91			£ 14 .33		
Outlet - Cowled -	Dampar Tari	racotta II1EE	4M1EEvD100mm						
Outlet - Cowled -	4902T	N/A	Male	5902T	NI/A	Male	6902T	NI/A	Male
		IN/A	IVIale		N/A	iviale		N/A	iviale
	£ 5 .83			£11.73			£13.02		
Outlet - Cowled -	- Damper - Bla	nck - H155xW1	55xD100mm						
	4902BK	44902BK	Male	N/A	N/A	N/A	N/A	N/A	N/A
	£ 5 .67	£ 7 .38							
Outlet - Louvered	d Grille - White	e - H155xW155	5xD45mm						
	4904W	N/A	Male	5904W	N/A	Male	6904W	N/A	Male
	£2.98			£ 9 .23			£ 8 .18		a.c
				-9	8 8 8 9 9 9 9		-0		
Outlet - Louvered			1			I		1	
	4904B	N/A	Male	5904B	N/A	Male	6904B	N/A	Male
	£2.98			£ 9 .23			£ 8 .18		
Outlet - Louvered	d Grille - Cotsv	vold - H155xW	/155xD45mm					1	
	4904C	N/A	Male	5904C	N/A	Male	6904C	N/A	Male
	£3.28			£10.17			£ 9 .78		
Outlet Lauren	d Cuilla Taura	U1FF: \	V/155D 45						
Outlet - Louvered	1	-	T T	FOOAT	NI/A	N 4 - 1 -	COO 4T	NI/A	N.4-1-
	4904T	N/A	Male	5904T	N/A	Male	6904T	N/A	Male
	£2.98			£ 9 .23			£ 8 .18		
Outlet - Louvered	d Grille - Black	- H155xW155	xD45mm		_				
	4904BK	44904BK	Male	N/A	N/A	N/A	N/A	N/A	N/A
	£ 4 .72	£ 5 .42							
				.			.		

^{*}Rectangular and round connections – fit directly to either 110x54mm or Ø100mm systems.







External Wall Duct Terminals								
Code		Connection	Code		Connection	Code		Connection
Boxed	Retail Pack		Boxed	Retail Pack		Boxed	Retail Pack	
l Grille - Flyscree	en - White - H15	5xW155xD45mm						
F4904W	44954W*	Male	F5904W	55904W	Male	F6904W	N/A	Male
£ 5 .33	£ 7 .04		£10.01	£ 11 .51		£11.43		
Grille - Flyscree	n - Brown - H15	5xW155xD45mm			I			
F4904B	44954B*	Male	F5904B	55904B	Male	F6904B	N/A	Male
£ 5 .33	£ 7 .04		£10.01	£ 11 .51		£11.43		
Grille - Flyscreen	ı - Cotswold - H1	55xW155xD45mn	n	-	ı			I.
F4904C	N/A	Male	F5904C	N/A	Male	F6904C	N/A	Male
£ 5 .85			£ 11 .03			£12.58		
Grille - Flyscreen	- Terracotta - H1	 55xW155xD45mn	n	1	I			ı
F4904T	N/A	Male	F5904T	N/A	Male	F6904T	N/A	Male
£ 5 .33			£10.01			£ 11 .43		
ed Soffit Vent -	White			-				
4804W	44804W	Male	N/A	N/A	N/A	N/A	N/A	N/A
£ 2 .12	£ 2 .72							
ed Soffit Vent -	Brown	ı		ı	1		ı	1
4804B	44804B	Male	N/A	N/A	N/A	N/A	N/A	N/A
£ 2 .12	£ 2 .72							
d Soffit Vent -	Flyscreen - Wl	nite			1			ı
F4804W	F44804W	Male	N/A	N/A	N/A	N/A	N/A	N/A
£ 2 .51	£3.21							
d Soffit Vent -	Flyscreen - Bro	own						I.
F4804B	F44804B	Male	N/A	N/A	N/A	N/A	N/A	N/A
£ 2 .51	£3.21							
	Code Boxed Grille - Flyscree F4904W £5.33 Grille - Flyscree F4904B £5.33 Grille - Flyscreen F4904C £5.85 Grille - Flyscreen F4904T £5.33 d Soffit Vent - 4804W £2.12 d Soffit Vent - F4804W £2.51 d Soffit Vent -	Code Boxed Retail Pack Grille - Flyscreen - White - H15 F4904W	Code Connection Boxed Retail Pack Grille - Flyscreen - White - H155xW155xD45mm F4904W 44954W* £5.33 £7.04 Grille - Flyscreen - Brown - H155xW155xD45mm F4904B 44954B* £5.33 £7.04 Grille - Flyscreen - Cotswold - H155xW155xD45mm F4904C N/A Male £5.85 Grille - Flyscreen - Terracotta - H155xW155xD45mm F4904T N/A Male £5.33 d Soffit Vent - White 4804W 44804W £2.12 £2.72 d Soffit Vent - Flyscreen - White F4804W F44804W Male £2.51 £3.21 d Soffit Vent - Flyscreen - Brown F4804B F44804B Male	Code Boxed Retail Pack Grille - Flyscreen - White - H155xW155xD45mm F4904W	Code Connection Gode Boxed Retail Pack Retail Pack I Grille - Flyscreen - White - H155xW155xD45mm F5904W F4904W 44954W* Male F5904W \$55904W F10.01 £11.51 Grille - Flyscreen - Brown - H155xW155xD45mm F5904B F4904B 44954B* Male £5.33 £7.04 Male F4904C N/A Male F4904C N/A Male F5904C \$11.03 Grille - Flyscreen - Terracotta - H155xW155xD45mm F5904C F4904T N/A Male F5904T N/A £10.01 N/A F5904T N/A £10.01 N/A N/A N/A	Code	Code Retail Pack Connection Boxed Retail Pack Code Boxed Connection Retail Pack Code Boxed Code Retail Pack Code Boxed Code Boxed Code Boxed Retail Pack Grille - Flyscreen - White - H155xW155xD45mm F5904W 55904W Male F6904W N/A Grille - Flyscreen - Brown - H155xW155xD45mm F5904B 55904B Male F6904B N/A grille - Flyscreen - Cotswold - H155xW155xD45mm F5904B 55904B Male F6904B N/A grille - Flyscreen - Terracotta - H155xW155xD45mm F5904C N/A Male F6904C N/A grille - Flyscreen - Terracotta - H155xW155xD45mm F5904C N/A Male F6904C N/A grille - Flyscreen - Terracotta - H155xW155xD45mm F5904T N/A Male F6904C N/A grille - Flyscreen - White N/A N/A N/A N/A N/A d Soffit Vent - White N/A N/A N/A N/A N/A d Soffit Vent - Flyscreen - White N/A N/A N/A N/A N/A grille - Flyscreen - White N/A N/A </td	

External Roc	of Duct Tern	ninals								
Description Code Connec			Connection	Code		Connection	Code		Connect	
	Boxed	Retail Pack		Boxed	Retail Pack		Boxed	Retail Pack		
Roof Cowl - Univ	versal									
1	4411	N/A	Male	4411	N/A	Male	4411	N/A	Male	
	£182.12			£182.12			£182.12			

^{*}Rectangular and round connections - fit directly to either 110x54mm or Ø100mm systems.

Square grilles and cowls for Ø100mm - 154mm x 154mm. Square grilles and cowls for Ø125mm & Ø150mm - 200mm x 200mm.

Rigid Duct Systems Ancillary Range

Ancillaries									
Description	Code	Code		Code		Connection	Code		Connection
	Boxed	Retail Pack		Boxed	Retail Pack		Boxed	Retail Pack	
Duct - Intumesce	ent - Sealant -	4hrs Fire Resist	tance						
Com	DDSEAL	N/A	N/A	DDSEAL	N/A	N/A	DDSEAL	N/A	N/A
Carry .	£ 11 .15			£11.15			£ 11 .15		
Duct - Tape - Alu	ıminium - 45r	n				I			1
	50TP45	N/A	N/A	50TP45	N/A	N/A	50TP45	N/A	N/A
1	£ 21 .76			£ 21 .76			£21.76		
Duct - Tape - PV	C - 4.6m								
	123-4	40123	N/A	123-4	40123	N/A	123-4	40123	N/A
	£ 3 .21	£ 4 .21		£3.21	£ 4 .21		£3.21	£ 4 .21	
Duct - Tape - PV	C - 33m								
	123	N/A	N/A	123	N/A	N/A	123	N/A	N/A
	£ 11 .11			£ 11 .11			£ 11 .11		

Ancillaries apply to both rectangular and round rigid ducting.



In-line Adapte	ers					
Description	Size		Code		Connection	Dimensions
	From (mm)	To (mm)	Boxed	Retail Pack		
Round – Round		1				
0	Ø80	Ø100	DD019 £ 7 .04	N/A	Duct/Male	1 15mm 1 1 1 1 1 1 1 1 1 1
0	Ø100	Ø110	120 £ 2 .21	40120 £ 2 .70	Female/Male	40110mm
0	Ø100	Ø125	119 £ 2 .99	40119 £ 3.51	Duct/Male	4Ø125mm √60mm √60mm
0	Ø120	Ø125	519 £ 2 .81	N/A	Female/Female Material: Rubber	120mm Þ
0	Ø100	Ø150	619 £ 3 .59	N/A	Duct/Male	4125mm 4 0150mm
0	Ø125	Ø150	118 £ 3 .32	50118 £ 3 .78	Duct/Male	40125mm 4000mm
0	Ø150	Ø160	620 £ 28 .23	N/A	Duct/Male Material: Metal	40160mm ►
0	Ø150	Ø200	819 £ 3 .82	N/A	Duct/Male	40200mm¥
Space Saving						
	Ø105	Ø125	544 £ 2 .77	N/A	Male/Male	105mm ► 125mm ►
	Ø100/Ø125	Ø150	644 £ 3 .32	N/A	Male/Male/Male	4Ø125mm ► 4Ø100mm ► 4Ø150mm ►
V	110x54	Ø100	DD071 £ 3 .51	40071 £ 4.52	Female/Male	4 Ø1 00 nm }

Rigid Duct Systems Adapter Range

In-line Adap	ters					
Description	Size		Code		Connection	Dimensions
	From (mm)	To (mm)	Boxed	Retail Pack		
Rectangular – Ro	ound					
	110x54	Ø100	DD070 £ 5 .92	40070 £7.04	Female/Duct	4 Months
9	204x60 To single airbrick	Ø100	DD073 £ 5 .92	N/A	Male/Male	4Ø100mm
V	204x60	Ø125	570 £ 12 .25	50570 £ 14 .08	Female/Duct	40125mm
9	220x90	Ø150	970 £ 14 .93	N/A	Female/Female	4@150mm
	227x133 To double airbrick	Ø100, Ø125, Ø150	954 £ 64 .31	N/A	Female/Male/ Male/Male	4133mm 4 (133mm 4 (133mm 4 (133mm 4 (133mm 4 (133mm 4 (133mm 5 (133mm 4 (133mm 5
ectangular - Re	ctangular	1	'	'	<u>'</u>	,
	204x60	110x54	DD077 £3.93	40077 £4.72	Duct/Male	\$54mm
	220x90	204x60	957 £ 5 .92	N/A	Male/Female	\$220mm
	220x90	204x60	958 £ 11 .58	N/A	Female/Female	\$60mm
	220x90 To double airbrick	227x133	977 £ 5 .92	N/A	Male/Female	133mm 133mm

Plenums						
Description	Size		Code		Connection	Dimensions
	From (mm)	To (mm)	Boxed	Retail Pack		
Fixed Socket			I		1	
1	110x54	Ø100	DD030 £5.52	40030 £ 6 .74	Female/Duct	Ø100mm Ø100mm
Fixed Spigot						
	110x54	Ø100	DD040 £ 5 .52	40040 £ 6 .74	Female/Male	Marion A de 100mm
	204x60	Ø102	440	N/A	Female/Male	√ Ø102mm →
			£ 10 .11		Connects to hose only	* SORWING SOR
3	204x60	Ø125	£ 10 .11	N/A	Female/Male	10125mm
9	204x60	Ø150	640 £ 10 .11	N/A	Female/Male	Ø150mm
Offset Rotating Sp	igot - Rotates E	ccentrically to All	ow Alignment v	vith Fixed Applian	ces	,
	204x60	Ø100	441 £ 12 .25	N/A	Female/Male	1Ø100mm
	204x60	Ø125	541 £ 12 .25	50541 £ 14.0 8	Female/Male	1Ø125mm) (204mm) (204mm)
	204x60	Ø150	641 £ 12 .25	N/A	Female/Male	10150mm)
9	220x90	Ø100	941 £ 14 .53	N/A	Female/Male	1Ø100mm ►
P	220x90	Ø125	951 £ 14 .53	N/A	Female/Male	1Ø125mm
P	220x90	Ø150	961 £ 14 .53	N/A	Female/Male	1Ø150mm ►

Rigid Duct Systems Duct Kit Range







Background '	Ventilators	5							
Description	Code		External	Code		External	Code		External
	Boxed	Retail Pack	Connection	Boxed	Retail Pack	Connection	Boxed	Retail Pack	Connection
Telescopic - Diffu	ser - White - v	vith Environm	ental Filter						
	2404W £ 65 .13	N/A	Ø100mm	N/A	N/A	N/A	N/A	N/A	N/A
Telescopic - Diffu	ser - Brown - v	with Environm	nental Filter		'	•		'	'
	2404B £ 65 .13	N/A	Ø100mm	N/A	N/A	N/A	N/A	N/A	N/A
Telescopic - Diffu	ser - Cotswold	d - with Enviro	nmental Filter						
	2404C £ 71 .70	N/A	Ø100mm	N/A	N/A	N/A	N/A	N/A	N/A
Telescopic - Diffu	ser - Terracott	a - with Enviro	onmental Filter					'	
	2404T £ 65 .13	N/A	Ø100mm	N/A	N/A	N/A	N/A	N/A	N/A
Accessory - Enviro	onmental Filte	r	ı			1			ı
	40AF £ 15 .17	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Accessory - Poller	n Filter	'	'		·			'	'
	40AFP £ 15 .17	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Telescopic - Cowl	ed Damper - \	Nhite						1	
	N/A	N/A	N/A	508W £ 23 .68	N/A	Ø125mm	N/A	N/A	N/A

Rigid Duct Systems Duct Kit Range







Cooker Hood	Extraction	Kits				
Description	Code		External			
	Boxed	Retail Pack	Connection			
Cowled - White						
1	212W	N/A	Ø100mm			
	£ 43 .37					
Cowled - Brown	•					
A STATE OF THE PARTY OF THE PAR	212B	N/A	Ø100mm			
	£ 43 .37					
Cowled - Brown - 9	0° Bend					
A-7-1	214B	N/A	Ø100mm			
	£ 47 .59					
Cowled - White						
7	N/A	N/A	N/A			
Cowled - Brown						
7	N/A	N/A	N/A			

Code		External
Boxed	Retail Pack	Connection
N/A	N/A	N/A
N/A	N/A	N/A
N/A	N/A	N/A
227W	N/A	Ø125mm
£ 79 .65		
227B	N/A	Ø125mm
£ 79 .65		

Code	External	
Boxed	Retail Pack	Connection
		1
N/A	N/A	N/A
		ı
N/A	N/A	N/A
	'	
N/A	N/A	N/A
N/A	N/A	N/A
	<u> </u>	
N/A	N/A	N/A







Cooker Hood Extraction Kits						
Description	Description Code					
	Boxed	Retail Pack	Connection			
Double Airbrick - V	Vhite - 90° Be	end				
1	N/A	N/A	N/A			
Double Airbrick - B	rown - 90° B	end				
1	N/A	N/A	N/A			
Double Airbrick - White - 90° Bend - Rigid Connection						
1	N/A	N/A	N/A			

Code		External		
Boxed	Retail Pack	Connection		
N/A	N/A	N/A		
N/A	N/A	N/A		
N/A	N/A	N/A		
IV/A	IN/A	IV/A		

Code		External	
Boxed	Retail Pack	Connection	
2653W	N/A	Ø150mm	
£ 124 .06			
2653B	N/A	Ø150mm	
£124.06			
	_		
2000	NI/A	Ø150	
2655W	N/A	Ø150mm	
£127.29			



Rigid Duct Systems Duct Kit Range








Tumble Dryer	Tumble Dryer Extraction Kits						
Description	Code		External				
	Boxed	Retail Pack	Connection				
Wall - Cowled - W	hite /						
-570	240W	N/A	Ø100mm				
A	£ 18 .98						
Wall - Hose - Gravi	ty Flap - White	2					
60	N/A	40205	Ø100mm				
		£ 17 .83					
Wall - Hose - Cow	led - White						
-	202W	40202	Ø100mm				
	£ 17 .95	£18.30					
Wall - Hose - Cow	led - Brown						
	202B	N/A	Ø100mm				
	£ 17 .95						
Wall - Hose - Cow	led - White						
	N/A	N/A	N/A				
Wall - Hose - Cow	led - Brown		•				
	N/A	N/A	N/A				

Code		External
Boxed	Retail Pack	Connection
N/A	N/A	N/A
	1	
N/A	N/A	N/A
N/A	N/A	N/A
,, .	14/7	14/7
N/A	N/A	N/A
202-5W	N/A	Ø125mm
£26.63		
	1	
202-5B	N/A	Ø125mm
£26.63		

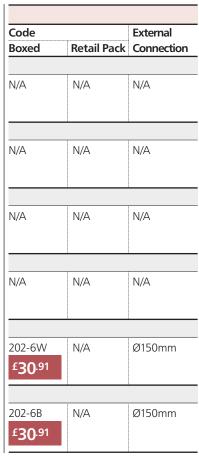







Tumble Dryer Extraction Kits								
Description	Code	External						
	Boxed	Retail Pack	Connection					
Wall - Cowled - Wh	nite							
- 69	207W	40207	Ø100mm					
A	£22.98	£28.52						

Code		External
Boxed	Retail Pack	Connection
N/A	N/A	N/A
		1 4//

Code	
Retail Pack	Connection
N/A	N/A
	1

Rigid Duct Systems







Duct Kit Range

High Rise Kit	ts								
Description	Code		External	Code		External	Code		External
	Boxed	Retail Pack	Connection	Boxed	Retail Pack	Connection	Boxed	Retail Pack	Connection
Cowled - White									
	2447W	N/A	Ø100mm	N/A	N/A	N/A	N/A	N/A	N/A
)	£22.98								
Cowled - Brown			I						
	2447B	N/A	Ø100mm	N/A	N/A	N/A	N/A	N/A	N/A
	£22.98								
Cowled - Terraco	otta		<u> </u>			<u> </u>			
	2447T	N/A	Ø100mm	N/A	N/A	N/A	N/A	N/A	N/A
	£22.98								
Cowled - White	'		ı					'	
	N/A	N/A	N/A	N/A	N/A	N/A	2647W	N/A	Ø150mm
)							£30.52		
Cowled - Brown	1	1			1	<u> </u>			
100	N/A	N/A	N/A	N/A	N/A	N/A	2647B	N/A	Ø150mm
							£30.52		

Flow Control Plenum for Architectural Grilles



KEY FEATURES

- Allows simple connection to architectural grilles – no air valves necessary
- Enables commissioning to be carried out prior to fixing the ceiling boards
- Adjusting the air terminal for commissioning is quick and easy

KEY BENEFITS

- Integral flow control device cannot be easily tampered with, thereby reducing the likelihood of impacting system performance and indoor air quality
- Commissioning rates can be agreed prior to ceilings being fixed; enabling peace of mind that the required air flow rates will be achieved (if fitted correctly) and less risk of costly remedial work
- Ability to integrate stylish grilles to fit interior design scheme

Innovatively designed to include an integral flow control device; allowing connection to a range of stylish grilles and single fix commissioning.

Why they are needed:

When installing a centralised mechanical extract system into a dwelling, the air flow rates need to be balanced and commissioned at the internal terminals to ensure the correct rates are achieved.

An integral flow control device allows the required air flow rates to be easily set and an attractive architectural grille directly fitted to the plenum – regardless of the installation stage; no air valves required.



Flow Control Plenum for Architectural Grilles See page 59

540-FC



Grille, Gloss White Finish Grille, Silver Finish Grille, Brushed Metal Finish Grille, Indent, Gloss White Finish Grille, Indent, Silver Finish See page 69-70

TFF100-CF1W TFF100-CF1S TFF100-CF1BM TFF100-DT1W TFF100-DT1S




To help adjust the integral flow control device for commissioning and balancing, we also offer a Flow Control Adjustment Kit – code FCAK1.

For technical information visit: www.domusventilation.co.uk

Rigid Duct Systems Duct Solution Range

High Efficiency Green Line Duct Bends

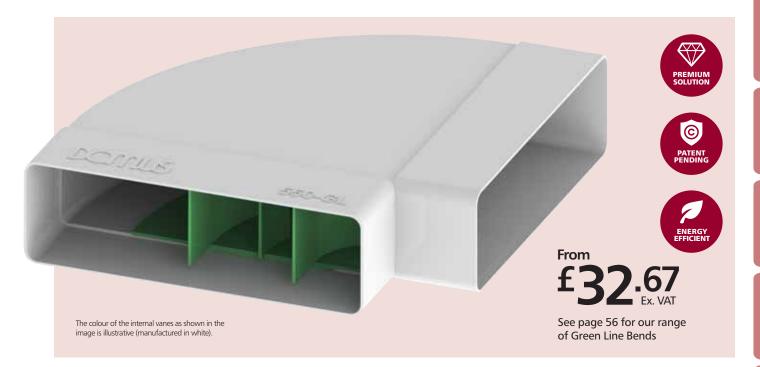

KEY FEATURES

- Smoothly channels air through the duct bend in a uniform flow
- Performance has been tested by the Building Research Establishment (BRE)

KEY BENEFITS

- Reduces duct resistance by up to 60% to lower the system's pressure drop and overall energy usage
- Reduced air speed through the bend to lower system noise

Engineered to significantly reduce duct resistance, lower system noise and overall energy usage. Domus Green Line bends are an innovative solution for a well designed and energy efficient duct system.

Why they are needed:

Due to the profile of a duct bend, air travelling through it can become turbulent, causing increased resistance and system noise. As a consequence, the mechanical extract appliance will need to work harder in order to meet the required air flow rates; therefore consuming more energy.


Domus Green Line high efficiency 90° duct bends have been specifically designed to enable a uniform flow of air through the section of duct, reducing the duct resistance by up to 60% and lowering the air speed. All of which results in a quieter and more efficient ventilation system.



To support the most popular rectangular rigid duct profiles, Domus Green Line bends are available to install with 204x60mm (550-GL) and 220x90mm (950-GL) ducting.

For technical information visit: www.domusventilation.co.uk

PERFORMANCE

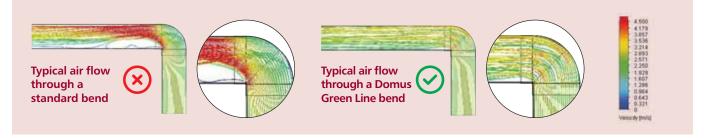

Sound Attenuators - @Microban Protected



KEY FEATURES

- Excellent sound attenuation properties as verified by the Sound Research Laboratories (SRL)
- Microban® protected foam helps enable a long life, clean and fresh ventilation system
- Low profile increases installation options and offers greater flexibility
- Lightweight and easy to fit for quicker installation time
- Can also be used with Domus Thermal duct insulation

KEY BENEFITS

- Significantly reduces transmitted appliance noise and room-to-room cross talk
- Helps facilitate occupant acceptance of a continuously running centralised ventilation system
- Helps achieve Building Regulation recommendations

Significantly reduce noise transmitted from centralised appliances and 'cross talk' travelling between rooms in duct systems.

Why they are needed:

Noise generated by a mechanical extract appliance could result in occupants incorrectly altering the performance of their system and as a consequence, detrimentally impacting indoor air quality.

To avoid this, Building Regulations stipulate that the system should not produce excessive noise that could discourage occupants from using it correctly.

In addition to this, resident cross talk carried through connecting room-to-room ducting can also impair homeowner comfort.




To support the most popular rectangular rigid duct profiles our enhanced Domus attenuators are available to install with 204x60mm and 220x90mm duct systems.

For technical information visit: www.domusventilation.co.uk



Rigid Duct Systems

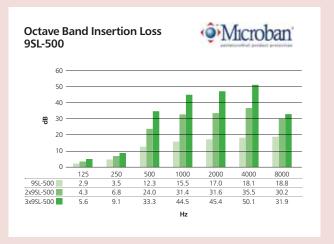

Cumulative length acoustic sound results

The diagrams above illustrates the increased sound absorption levels when close-coupling up to three individual 0.5m lengths of rigid duct attenuators, thus reducing noise levels by up to 55dB.

Sound Absorption Chart								
Size (mm)	Code	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz	8000Hz
204x60	5SL-500	0.2	4.2	7.4	19	19.3	21.6	22.2
220x90	9SL-500	2.9	3.5	12.3	15.5	17	18.1	18.8



Join more than one 0.5m length sound attenuator, for a longer duct run.


Installation

Rigid duct attenuators can be installed in roof and ceiling voids and are recommended to be fitted on the room-side of the ventilation appliance, to limit cross talk and to be near each inlet and outlet.



Approved Document F of the Building Regulations (F1 Means of Ventilation) recommends that the system should not produce excessive noise that could discourage occupants from using it correctly. A rigid duct attenuator should therefore form part of duct system, to ensure occupants do not incorrectly alter the performance of the system and as a consequence, detrimentally impact indoor air quality.

THERMALI Rigid Duct Insulation

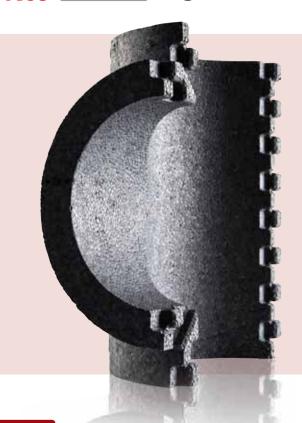













See page 66 for our full range of round duct insulation products and page 58 for rectangular.

BREADTH OF RANGE

Domus Thermal is available in a range of profiles and fittings to insulate the Domus:

- Ø100mm EasiPipe ducting, see page 66
- Ø125mm EasiPipe ducting, see page 66
- Ø150mm EasiPipe ducting, see page 66
- 204x60mm Supertube ducting, see page 58
- 220x90mm Megaduct ducting, see page 58

To support the system, PVC coated, perforated, TS22, steel banding is also available for surface mounting or suspending the insulated system.

As an integral part of Domus rigid duct systems, Domus Thermal is a unique and patented duct insulation system, designed specifically to radically improve the thermal insulation of rigid ducting in domestic properties.

Why Domus Thermal?

- Complies with 2010 Building Regulations and NHBC requirements*
- LABC registered
- Reduces heat loss and virtually eliminates the formation of condensation
- Insulates ducting passing through cold spaces and in the heated area of a dwelling
- Insulates both the exhaust and intake ducts into the MVHR unit
- An installer-friendly solution which can be fitted quickly and reliably without the need for gluing or taping

*Note: NHBC requirement for unheated areas require supplementary insulation. Please consult NHBC Standards Chapter 3.2

Why it's needed:

Current Building Regulations require that greater provision needs to be made for insulating ducting in domestic properties.

Building Regulations demand:

≤0.04 W/(m.K) thermal conductivity at 25mm insulation thickness.


Minimum thermal resistance or R-value = 0.025/0.04 = 0.625 K/W.

Domus Thermal provides:

≤0.03 W/(m.K) thermal conductivity at 20mm insulation thickness.

Thermal resistance or R-value = 0.020/0.03 = 0.666 K/W.


For technical information visit: www.domusventilation.co.uk

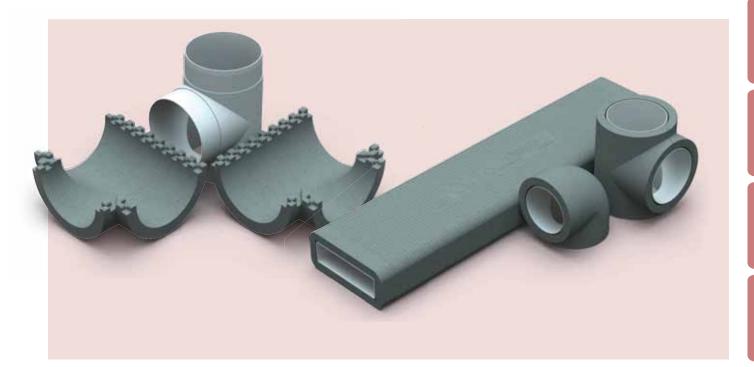

INSTALLATION


Rigid Duct Systems

Currently, compliant solutions are more labour intensive and require higher skill levels to install. Domus Thermal's simple interlocking feature means that the system is quicker and easier to install. This revolutionary method can therefore significantly reduce installation costs.




Improved insulation properties

Domus Thermal is manufactured from flame retardant (EN 13163 class E) Silver EPS (expanded polystyrene), which provides its enhanced thermal insulation properties and enables the system to exceed the requirements of the current Building Regulations.

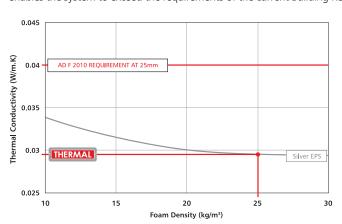

The Silver EPS used to manufacture Domus Thermal provides a significantly improved thermal conductivity value due to the inclusion of carbon particles, which gives Domus Thermal its distinctive silver colour.

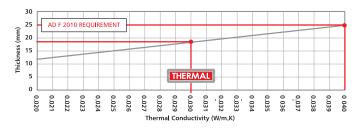

Fire Sleeves



Domus Intumescent Fire Sleeves prevent the spread of fire where Domus rigid ducting penetrates fire compartment walls. The range includes horizontal and vertical sleeves.

KEY FEATURES

Domus Fire Sleeves consist of a flexible galvanised steel shell containing graphite based intumescent material. They are manufactured to suit the following Domus duct:



Rectangular

- 110 x 54mm horizontal
- 204 x 60mm horizontal
- 220 x 90mm horizontal



Round

- Ø125mm horizontal & vertical
- Ø150mm vertical

Horizontal application

Why Domus Horizontal Fire Sleeves?

- Rectangular profiles tested to BSEN 1366-3: 2009
- Round profile tested to the temperature and pressure conditions of BSEN 1363-1: 1999 and the principles of BSEN 1366-3: 2009
- Tested with Uncapped/Uncapped (U/U) duct configurations as required for ventilation duct
- Up to 90 minutes fire rating (see table below for exact rating)
- Rectangular profiles are very slimline, saving ceiling space
- Suitable for masonry walls or plasterboard partitions
- Suitable for insulated and non-insulated partitions
- Can be retrofitted
- No mechanical fixings required
- Robust galvanised steel shell
- Performance unaffected by weathering (type x durability)

Product Code	Duct Size	Space Needed Around Duct to Fit the Fire Sleeve	Recommended Aperture	Length	Fire Rating (minutes)
DFS110	110 x 54mm	5mm	122 x 66mm	140mm	120
DFS204	204 x 60mm	5mm	216 x 72mm	140mm	90
DFS220	220 x 90mm	9mm	241 x 112mm	140mm	60
DFS125	Ø125mm	20mm	170mm	180mm	90



REGULATIONS

Building Regulations require all services passing through fire compartment walls. Domus Fire Sleeves therefore allow plastic duct to meet the requirements of Building Regulations.



For installation and technical information visit: www.domusventilation.co.uk

Vertical application


Why Domus Vertical Fire Sleeves?

- Tested to BSEN 1366-3: 2009
- CE Marked
- Up to 4 hour fire rating
- Suitable for PVC, PVC-U, PE, HDPE, MDPE, PP & ABS pipes
- Available for Ø125mm and Ø150mm ducting
- Can be retrofitted
- Robust galvanised steel shell
- Performance unaffected by weathering (type X durability)





Performance					
Product Code	Duct Size	Space Needed Around Duct to Fit the Fire Sleeve	Recommended Aperture	Length	Fire Rating (minutes)
DFSV125	Ø125mm	45mm	Ø132mm	50mm	240
DFSV150	Ø150mm	50mm	Ø162mm	50mm	60

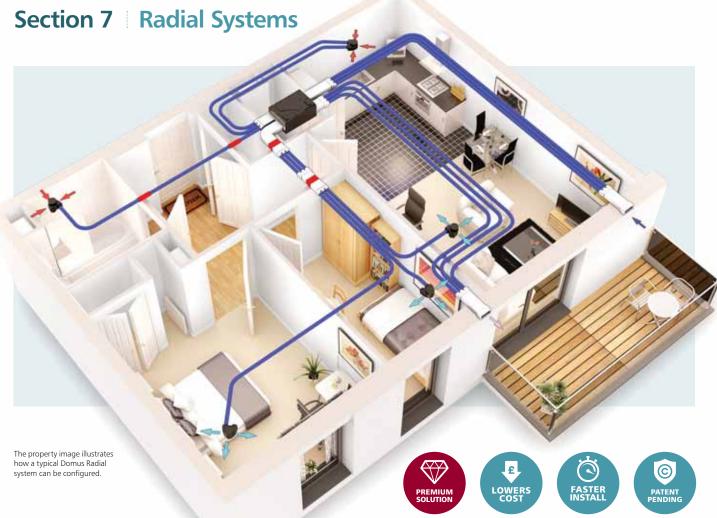

INSTALLATION



Suitable for new build and refurbishment projects

Perfect ventilation choice for all residential dwellings



- Apartments
- Flats



Homes



- Student Accomodation
- Hotels
- Care Homes

Whole house air distribution systems, which provide simple, quick and hassle free installation, to save time and money.

Domus Radial systems are a clever plug and play whole house ventilation solution, which use manifold distribution to evenly service each room through semi-rigid duct. These systems incorporate a centralised mechanical unit; either a Mechanical Ventilation with Heat Recovery (MVHR) or Mechanical Extract Ventilation (MEV).

Why Domus Radial?


- Up to 60% quicker and easier to install, saving contractors and developers time and money
- Easy to order pre-selected house packs enable straightforward selection
- Option of a slimline manifold (125mm deep) OR NEW Domus Adapt, to evenly distribute air
- Use of Domus Adapt allows installers to run straight out into Radial duct, lowering project costs. See page 100
- Rapid fixing mechanism enable secure and air tight connection with no leakages
- Corrugated construction and the unique formulation of Radial duct resists stress cracking and onsite damage
- Eliminates room-to-room cross talk, for a quieter home

- Simplified design layout makes the system ideal for new and refurb projects
- Increased air capacity for reduced air noise, low duct losses and improved appliance efficiency
- Ability to integrate stylish architectural grilles, through the use of an innovative Flow Control Plenum; no air valves necessary
- Plenum with optional twin connection increases air flow and lowers engery usage
- Can integrate Domus rigid duct to create versatile hybrid solutions that suit your project

For technical information visit: www.domusventilation.co.uk

90 www.domusventilation.co.uk







Whole house Domus extract units; either MVHR or MEV.

MVHR:

- HRX-aQ, see page 8
- HRXD, see page 12
- HRX2D, see page 14

MEV:

■ CMX, see page 20





OR



The NEW Domus Adapt OR slimline manifold evenly distribute air.


Illustration (on opposite page) features Domus Adapt.

Domus Adapt (for kitchen and up to two wet rooms)



Manifold







Domus Flow Control Plenum and stylish architectural grille.



Domus Adapt 204x60mm fire compartment sleeve.



Domus Radial duct fire compartment sleeve.



Domus rigid duct with insulation and sound attenuation soultions.



Domus rigid duct 220x90mm external airbrick and adapter.

Other key products for use with Domas Radial



Domus Intumescent rigid duct sealant, for sealing between rigid duct connectors.



Domus Radial duct insulation sleeve. Typically insulates intake and exhaust into MVHR unit.



Domus roof cowls for larger developments.

Radial Parts Range Radial Systems

Radial Parts

Parts that may be needed to make up a Domus Radial system.

Property configurations vary, which is why you can either purchase a Radial system as a simple house pack or as parts, bespoke for your project.

For FREE design and technical advice, email: vent.sales@domusventilation.com



Looking to sell or purchase a ready made Radial house pack?





If so, see pages 98-99 to choose your relevant pack.

The three columns below highlight what is included in Domus house packs, as listed on pages 98-99

				iisted on pages 30 33			
Туре	Code	Description	Price	MVHR Type 1	MVHR Type 2	MEV Type 1	
Radial Semi-Rigid Duc	t and Clips						
	RDD75(25)	Semi-Rigid Duct, Ø75mm - 25m Coil	£181.86				
	RDD75	Semi-Rigid Duct, Ø75mm - 50m Coil	£218.25	Qty 2	Qty 2	Qty 1	
5	RDCLIP75	Duct Clips, Ø75mm – Pack of 10	£10.31	Qty 8	Qty 8	Qty 8	
80	RDPC75	Manifold Protective Caps	£15.67	Qty 10	Qty 10	Qty 10	
Radial Manifolds and	Domus Adapts	'				1	
000	RDM-EP150	Manifold (Round)	£213.93	Qty 2	Qty 2	Qty 2	
000	RDM-MD220	Manifold (Rectangular)	£213.93			Qty 1	
1 2 3 4 5 6 7 8 9 19 11 12 1 2 3 4 5 6 7 8 9 10 11 12	RDLAB	Manifold Extract and Supply Label Kits	£6.37	Qty 1	Qty 1	Qty 1	
O Pen	RDA-3FA	Adapt 204x60mm In-Line Adapter 3xØ75mm Radial Sockets	£15.87				
Of the	RDA-3FC	Adapt 220x90mm In-Line Adapter 3xØ75mm Radial Sockets	£15.87				
O O O	RDA-3FV90	Adapt 220x90mm Vertical 90° Bend 3xØ75mm Radial Sockets	£15.59				
Ten Pen	RDA-3FH90	Adapt 220x90mm Horizontal 90° Bend 3xØ75mm Radial Sockets	£18.34				

Radial Systems Radial Parts Range

highlight what is included in Domus house packs, as listed on pages 98-99.

				<i>J</i> .	
Code	Description	Price	MVHR Type 1	MVHR Type 2	MEV Type 1
ıct Components	ı			1	
RDA-3R90-125	Adapt Ø125mm Plenum 3xØ75mm Radial Sockets	£20.50			
RDA-3R90-150	Adapt Ø150mm Plenum 3xØ75mm Radial Sockets	£ 20 .50			
RDA-3T	Adapt 220x90mm T Piece 3xØ75mm Radial Sockets	£ 19 .66			
RDA-6T	Adapt 220x90mm T Piece 6xØ75mm Radial Sockets	£31.78			
RDA-6TB	Adapt 220x90mm T Piece 3xØ75mm Radial Sockets 3 from Branch	£31.78			
RDA-CSK3	Adapt Spares 2 Blanking Caps, 3 Clips and 3 Seals	£ 6 .99			
RDA-CSK6	Adapt Spares 4 Blanking Caps, 6 Clips and 6 Seals	£ 13 .34			
ıct Fire Solutions		1			
RDA-FSK	Adapt Fire Sleeve	£50.77			
RDFS75	Semi-Rigid Duct Fire-Stopping Sleeve	£23.85			
tions		1			
RDI-25X5M	Insulation for Ø75mm Semi-Rigid Duct	£22.19			
RDD125	Insulated Rigid Duct, Ø125mm - 1m	£38.80	Qty 8		
RDD150	Insulated Rigid Duct, Ø150mm - 1m	£56.98		Qty 8	Qty 4
RDD12590	Insulated Rigid Duct 90° Degree Bend, Ø125mm	£33.95	Qty 6		
RDD15090	Insulated Rigid Duct 90° Degree Bend, Ø150mm	£ 33 .95		Qty 6	Qty 3
	RDA-3R90-125 RDA-3R90-150 RDA-3R90-150 RDA-6T RDA-6T RDA-6TB RDA-CSK3 RDA-CSK6 RDA-FSK RDA-FSK RDA-FSK RDA-FSK RDA-FSK RDA-FSK RDA-FSK RDA-FSK RDA-FSK RDA-FSK	RDA-3R90-125 Adapt Ø125mm Plenum 3xØ75mm Radial Sockets RDA-3R90-150 Adapt Ø150mm Plenum 3xØ75mm Radial Sockets RDA-3T Adapt 220x90mm T Piece 3xØ75mm Radial Sockets RDA-6T Adapt 220x90mm T Piece 6xØ75mm Radial Sockets RDA-6T Adapt 220x90mm T Piece 3xØ75mm Radial Sockets RDA-6TB Adapt 220x90mm T Piece 3xØ75mm Radial Sockets 3 from Branch RDA-CSK3 Adapt Spares 2 Blanking Caps, 3 Clips and 3 Seals RDA-CSK6 Adapt Spares 4 Blanking Caps, 6 Clips and 6 Seals RDA-FSK Adapt Fire Sleeve RDF575 Semi-Rigid Duct Fire-Stopping Sleeve RDF575 Insulation for Ø75mm Semi-Rigid Duct RDD125 Insulated Rigid Duct, Ø125mm - 1m RDD150 Insulated Rigid Duct, Ø150mm - 1m RDD12590 Insulated Rigid Duct 90° Degree Bend, Ø125mm	RDA-3R90-125 Adapt Ø125mm Plenum 3xØ75mm Radial Sockets	Type 1	Type 1 Type 2 ct Components RDA-3R90-125 Adapt Ø125mm Plenum 3xØ75mm Radial Sockets £20.50 RDA-3R90-150 Adapt Ø150mm Plenum 3xØ75mm Radial Sockets £20.50 RDA-3T Adapt 220x90mm T Piece 3xØ75mm Radial Sockets £19.66 RDA-6T Adapt 220x90mm T Piece 6xØ75mm Radial Sockets £31.78 RDA-6TB Adapt 220x90mm T Piece 3xØ75mm Radial Sockets 3 from Branch £31.78 RDA-CSK3 Adapt Spares 2 Blanking Caps, 3 Clips and 3 Seals £6.99 RDA-CSK6 Adapt Spares 4 Blanking Caps, 6 Clips and 6 Seals £13.34 cct Fire Solutions RDA-FSK Adapt Fire Sleeve £50.77 RDFS75 Semi-Rigid Duct Fire-Stopping Sleeve £23.85 RDI-25X5M Insulated Rigid Duct, Ø150mm - 1m £38.80 Qty 8 RDD125 Insulated Rigid Duct, Ø150mm - 1m £36.98 Qty 8 RDD150 Insulated Rigid Duct, Ø150mm - 1m £56.98 Qty 6

For more information on Domus Adapt, see page 100.

Radial Parts Range

highlight what is included in Domus house packs, as listed on pages 98-99

				listed on pages 96-99			
Туре	Code	Description	Price	MVHR Type 1	MVHR Type 2	MEV Type 1	
Commonly Used Ri	gid Duct Components			·			
	593	Straight Duct Connector, Ø125mm	£ 4 .62	Qty 8			
	693	Straight Duct Connector, Ø150mm	£ 5 .64		Qty 8	Qty 4	
	981	Flat Duct Connector, 220x90mm	£6.97			Qty 2	
0	118	Circular Reducer, Ø150mm - Ø125mm	£6.97	Qty 2			
9	970	Adapter 220x90mm – Ø150mm	£ 14 .93			Qty 1	
	954	Double Duct Adapter	£64.31				
6	561	Flexible PVC Hose, Ø125mm - 1m	£ 3 .98	Qty 10	Qty 10	Qty 5	
0	125-5	Flexible Hose Clip, Ø125mm	£2.46	Qty 20	Qty 20	Qty 10	
Plenums and Intern	al Terminals						
(2)	RDOP-125 OR RDOP-125FC	Plenum, Ø125mm for Air Valve OR Flow Control Plenum, Ø125mm for Architectural Grilles	£ 24 .34	Qty 10 OR Qty 10 (Two options)	Qty 10 OR Qty 10 (Two options)	Qty 5 OR Qty 5 (Two options)	
	ART125-CF1S	Architectural Grille, Silver	£18.30	Qty 10 (Optional)	Qty 10 (Optional)	Qty 5 (Optional)	
	ART125-CF1BM	Architectural Grille, Brushed Metal	£18.30	Qty 10 (Optional)	Qty 10 (Optional)	Qty 5 (Optional)	
	ART125-CF1W	Architectural Grille, White	£12.75	Qty 10 (Optional)	Qty 10 (Optional)	Qty 5 (Optional)	
	ART125-DT1S	Architectural Grille, Silver with Indent	£18.30	Qty 10 (Optional)	Qty 10 (Optional)	Qty 5 (Optional)	
-	ART125-DT1W	Architectural Grille, White with Indent	£12.75	Qty 10 (Optional)	Qty 10 (Optional)	Qty 5 (Optional)	

Radial Parts Range

highlight what is included in Domus house packs, as listed on pages 98-99

			listed on pages 98-99			
Туре	Code	Description	Price	MVHR Type 1	MVHR Type 2	MEV Type 1
Plenums and Interna	al Terminals		<u>'</u>		'	•
	FCAK1	Flow Control Plenum Fixing / Adjustment Kit	£ 8 .24			
0	5907W	Diffuser, Ø125mm	£ 9 .01	Qty 10 (Optional)	Qty 10 (Optional)	Qty 5 (Optional)
and the same	ART125-SD2W	Diffuser, Ø125mm	£ 12 .75	Qty 10 (Optional)	Qty 10 (Optional)	Qty 5 (Optional)
/ IIII	ART125-SD1W	Diffuser, Ø125mm	£12.75	Qty 10 (Optional)	Qty 10 (Optional)	Qty 5 (Optional)
	ART125-CD1W	Diffuser, Ø125mm	£ 12 .75	Qty 10 (Optional)	Qty 10 (Optional)	Qty 5 (Optional)
	136-26	Air Valve, Ø125mm	£25.75	Qty 10 (Optional)	Qty 10 (Optional)	Qty 5 (Optional)
external Terminals						
	905W	Double Airbrick, 220x90mm, White	£ 11 .90			
	905B	Double Airbrick, 220x90mm, Brown	£ 11 .90			
	905C	Double Airbrick, 220x90mm, Cotswold	£ 13 .10			
	905T	Double Airbrick, 220x90mm, Terracotta	£ 11 .90			
W	4411	Roof Cowl	£182.12			
Rigid Duct Ancilliarie	25					
Carry .	DDSEAL	Domus Rigid Ducting Sealant, 310ml	£ 11 .15	Qty 1	Qty 1	Qty 1

Radial Systems

Radial Parts Range

highlight what is included in Domus house packs, as listed on pages 98-99

Code	Description	Price	MVHR Type 1	MVHR Type 2	MEV Type 1
nits & Accessories					
HRX-aQ	HRX-aQ MVHR Ceiling / Void Unit Various models available. See page 8 for technical information	From £1,018.71			
HRXD	HRXD MVHR Wall / Cupboard Unit See page 12 for technical information	From £1,126.44	Qty 1		
HRX2D	HRX2D MVHR Wall / Loft Unit See page 14 for technical information	From £1,506.83		Qty 1	
CMX-S	CMX MEV Ceiling / Void Unit See page 20 for technical information	£324.14			Qty 1
CMX-ASK1W	CMX Fresh Air Supply Kit with White Cowl	£ 51 .86			
CMX-ASK1B	CMX Fresh Air Supply Kit with Brown Cowl	£ 51 .86			
HRXC-AF	HRXD MVHR Filters (Sold as a pair)	£ 24 .19			
HRX2C-AF	HRX2D MVHR Filters (Sold as a pair)	£45.64			
297	MVHR Condensate Drainage Kit	£64.17			
	HRX-ASK1W CMX-ASK1B HRXC-AF HRX2C-AF	Inits & Accessories HRX-aQ MVHR Ceiling / Void Unit Various models available. See page 8 for technical information HRXD HRXD MVHR Wall / Cupboard Unit See page 12 for technical information HRX2D HRX2D MVHR Wall / Loft Unit See page 14 for technical information CMX-S CMX MEV Ceiling / Void Unit See page 20 for technical information CMX-ASK1W CMX Fresh Air Supply Kit with White Cowl CMX-ASK1B CMX Fresh Air Supply Kit with Brown Cowl HRXC-AF HRX2D MVHR Filters (Sold as a pair) HRX2C-AF HRX2D MVHR Filters (Sold as a pair)	Inits & Accessories HRX-aQ HRX-aQ MVHR Ceiling / Void Unit Various models available. See page 8 for technical information HRXD HRXD MVHR Wall / Cupboard Unit See page 12 for technical information From £1,126-44 HRX2D HRX2D MVHR Wall / Loft Unit See page 14 for technical information From £1,506-83 CMX-S CMX-S CMX MEV Ceiling / Void Unit See page 20 for technical information £324-14 CMX-ASK1W CMX Fresh Air Supply Kit with White Cowl £51-86 CMX-ASK1B CMX Fresh Air Supply Kit with Brown Cowl £51-86 HRXC-AF HRXD MVHR Filters (Sold as a pair) £24-19 HRX2C-AF HRX2D MVHR Filters (Sold as a pair)	INITS & Accessories HRX-aQ HRX-aQ MVHR Ceiling / Void Unit Various models available. See page 8 for technical information HRXD HRXD MVHR Wall / Cupboard Unit See page 12 for technical information From \$1,018.71 HRXD HRXDD MVHR Wall / Loft Unit See page 12 for technical information From \$1,126.44 Qty 1 From \$1,126.44 Qty 1 From \$1,126.44 CMX-S CMX-SEE page 14 for technical information From \$1,506.83 CMX-S CMX-SEE page 14 for technical information From \$1,506.83 CMX-SEE page 20 for technical information From \$1,126.44 From \$1,126.44 From \$1,126.44 From \$1,126.44 From \$1,126.44 From \$1,126.44 From \$1,126.44 From \$1,126.44 From \$1,126.44 From \$1,126.44 From \$1,126.44 From \$1,126.44 From \$1,126.44 From \$1,126.44 From \$1,126.44 From \$1,126.44 From \$1,126.44 From \$1,018.71 From \$1,126.44 From \$1,018.71 From \$1,126.44 From \$1,018.71 Fr	Type 1 Type 2 Inits & Accessories HRX-aQ HRX-aQ MVHR Ceiling / Void Unit Various models available. See page 8 for technical information HRXD HRXD MVHR Wall / Cupboard Unit See page 12 for technical information From \$1,126.44\$ Qty 1 HRX2D MVHR Wall / Loft Unit See page 14 for technical information From \$1,126.44\$ Qty 1 CMX-S CMX-S CMX MEV Ceiling / Void Unit See page 20 for technical information From \$1,126.44\$ Qty 1 \$1,126.44 Qty 1 \$1,126.44 CMX-S CMX-S CMX Fresh Air Supply Kit with White Cowl \$1,506.83 CMX-ASK1W CMX-Fresh Air Supply Kit with White Cowl \$2,186 CMX-ASK1B CMX-Fresh Air Supply Kit with Brown Cowl #51.86 HRXC-AF HRXD MVHR Filters (Sold as a pair) \$24.19 HRX2C-AF HRX2D MVHR Filters (Sold as a pair)

DOMUS RADIAL SYSTEMS

ENTILATION ADE SIMPLE








Domus Radial systems are a clever plug and play whole house ventilation solution, which use manifold distribution to evenly service each room through semi-rigid duct.

These systems incorporate a centralised mechanical unit; either a Mechanical Ventilation with Heat Recovery (MVHR) or Mechanical Extract Ventilation (MEV).

Domus Radial House Packs

Designed to make selling and installing Domus Radial simple and hassle free

Domus Radial House Packs are ideal for self builders and one-off straightforward residential developments. To check the suitability of a Radial House Pack, you can email designs to: vent.sales@domusventilation.com or call 03443 715 523.

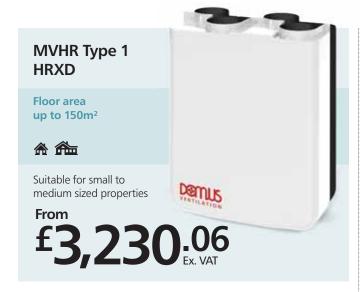

Pack incorporating a HRXD Mechanical Ventilation with Heat Recovery (MVHR) Unit

Fits inside a kitchen cupboard, utility room or loft space

HRXD MVHR performance:

- Low Specific Fan Power down to 0.66 W/(l/s)
- Heat exchange efficiency up to 86%

See house pack details, page 92

For MVHR perfomance details, see page 12

House Pack	S		
Code	Extract Unit	Price	Internal Terminal
RDK-HRXD	HRXD MVHR Unit	£3,230.06	Ø125mm Air Valves
RDK-HRXD-AR	HRXD MVHR Unit	£3,230.06	Order Architectural Grilles Separately

System Expansion Pack Code Description Qty Price RDSE2 Semi-Rigid Duct, Ø75mm - 50m £412.24 Duct Clips, Ø75mm - Pack of 10 5 Insulated Duct, Ø125mm - 1m 2 Insulated 90° Bend, Ø125mm 3 2 Straight Duct Connector, Ø125mm

Room	Expansion Pack - Air Valve		
Code	Description	Qty	Price
RDRE1	Outlet Plenum, Ø125mm	1	£ 42 .44
	Air Valve, Ø125mm	1	¹ 42.44
	Flexible PVC Hose, Ø125mm - 1m	1	
	Flexible Hose Clip, Ø125mm	2	



Pack incorporating a HRX2D Mechanical Ventilation with Heat Recovery (MVHR) Unit

Fits inside a utility room or loft space

HRX2D MVHR performance:

- Extremely Low Specific Fan Power down to 0.57 W/(l/s)
- Heat exchange efficiency up to 94%

See house pack details, page 92

For MVHR perfomance details, see page 14

House Pack	s		
Code	Extract Unit	Price	Internal Terminal
RDK-HRX2D	HRX2D MVHR Unit	£3,635.21	Ø125mm Air Valves
RDK-HRX2D-AR	HRX2D MVHR Unit	£3,635.21	Order Architectural Grilles Separately

Systen	n Expansion Pack		
Code	Description	Qty	Price
RDSE1	Semi-Rigid Duct, Ø75mm - 50m	1	£ 545 .60
	Duct Clips, Ø75mm - Pack of 10	5	-343.
	Insulated Duct, Ø150mm - 1m	2	
	Insulated 90° Bend, Ø150mm	3	
	Straight Duct Connector, Ø150mm	2	

Room	Expansion Pack - Air Valve		
Code	Description	Qty	Price
RDRE1	Outlet Plenum, Ø125mm	1	£ 42 .44
	Air Valve, Ø125mm	1	±4Z ^{.44}
	Flexible PVC Hose, Ø125mm - 1m	1	
	Flexible Hose Clip, Ø125mm	2	



Pack incorporating a CMX Mechanical Extract Ventilation (MEV) Unit Fits into ceiling voids and utility cupboard spaces – horizontally and vertcially

CMX MEV performance:

- Extremely low Specific Fan Power down to 0.24 W/(l/s)
- High air flow performance up to 120 l/s

See house pack details, page 92

For MEV perfomance details, see page 20

Code	Extract Unit	Price	Internal Terminal
RDK-CMXS	CMX MEV Unit	£1,511.19	Ø125mm Air Valves
RDK-CMXS-AR	CMX MEV Unit	£ 1,511 .19	Order Architectural Grilles Separately

System Expansion Pack


Code	Description	Qty	Price
RDSE1	Semi-Rigid Duct, Ø75mm - 50m	1	£545.60
	Duct Clips, Ø75mm - Pack of 10	5	-545.00
	Insulated Duct, Ø150mm - 1m	2	
	Insulated 90° Bend, Ø150mm	3	
	Straight Duct Connector, Ø150mm	2	

Room	Expansion	Pack -	Δir	Valve
1100111		rack -		vaive

Code	Description	Qty	Price
RDRE1	Outlet Plenum, Ø125mm	1	£ 42 .44
	Air Valve, Ø125mm	1	±4Z.44
	Flexible PVC Hose, Ø125mm - 1m	1	
	Flexible Hose Clip, Ø125mm	2	






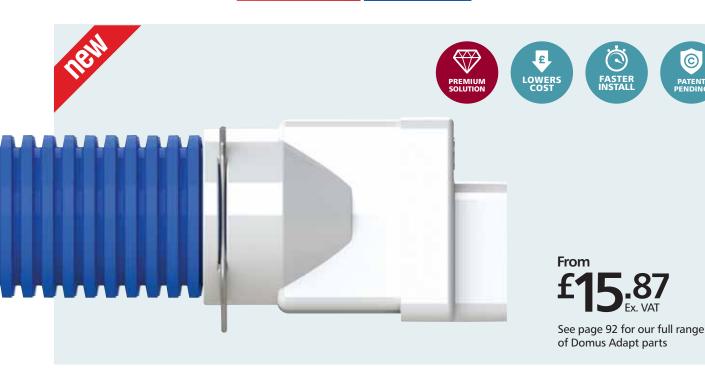

BENEFITS

- Lowers project costs
- Simplifies installation, to overcome site constraints and space restrictions
- Reduces installation time
- Allows for a variety of duct configurations

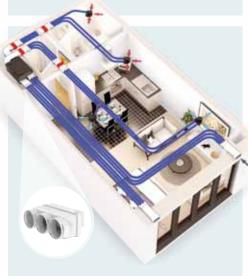

No typical void space is too tight or duct run too complicated for Domus Adapt, with options available to suit a variety of configurations and installations.

Domus Adapt is a unique duct solution, which will allow for simple, straightforward connection between PCDB (Product Characteristics Database) listed Domus Radial semi-rigid and rigid duct systems with minimal effort.

Designed to lower project costs, whilst also reducing duct installation time by up to 25%; Domus Adapt has innovatively evolved Radial semi-rigid duct systems, to make installing whole house ventilation, **EASIER** and **MORE COST EFFECTIVE** than ever before.


Why Domus Adapt?

- Ideal for apartments or cluster developments, such as care homes and student accommodation*
- Allows installers to run straight into Domus Radial semi-rigid Ø75mm duct; no need for tape, screws or sealant
- Provides a complete ducting solution, including the ducting for supply and extract when supporting a kitchen plus two wet rooms
- Will remove the need for a manifold; lowering installation costs and time
- A versatile solution to help overcome issues associated with a lack of installation space or tight void areas
- Helps prevent complicated duct runs, providing simpler design and installation
- Domus Radial is a simple plug-and-play, labour saving duct system, which takes away the need for traditional jointing

*Capable of achieving up to 30l/s per fitting

Mechanical Ventilation with Heat Recovery (MVHR) Range with Domus Adapt

Domus Adapt can be seamlessly installed with the HRX Mechanical Ventilation with Heat Recovery range, allowing fitters to ADAPT straight into Domus Radial duct, thus removing the need for expensive manifolds. All units are available with a Bluebrain controller, for enhanced user control and air comfort.

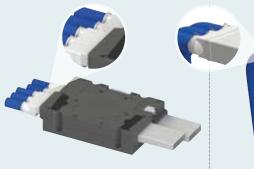

HRX-aQ


Ideal for ceiling/void applications in a floor area up to 80m². For more information on unit, see page 8.



HRXD

see page 12.

For installation in a floor area up to 150m². For more information on unit,



HRX2D

see page 14.

For installation in a floor area up to 250m².
For more information on unit,

Mechanical Extract Ventilation (MEV) with Domus Adapt



As a versatile solution, the CMX Mechanical Extract (MEV) appliance is available with Domus Adapt, for a straight in and out Radial duct run.

Code: CMXR-S

Socket Size: 220x90mm

Radial Duct Socket Size: Ø75mm Includes: CMXR-S MEV unit, 1 blanking cap, 3 seals and 3 clips

£351.09

Fittings

The Domus Adapt range includes T pieces, In-line Adapters, Elbows and Bends, available to install with a MVHR or MEV appliance. All pressure loss figures have been tested by the Building Research Establishment (BRE).

Adapt T Pieces

RDA-3T, 220x90mm RDA-6T, 220x90mm

Adapt In-Line Adapters



RDA-3FA, 204x60mm RDA-3FC, 220x90mm

Adapt Elbows



RDA-3R90-125, Ø125mm RDA-3R90-150, Ø150mm

Adapt Horizontal 90° Bend

RDA-6TB, 220x90mm



RDA-3FV90, 220x90mm

Adapt Vertical 90° Bend



RDA-3FH90, 220x90mm

Adapt Spares





RDA-CSK3 RDA-CSK6

Duct Fire Sleeve



RDA-FSK, 204x60mm

DOMUS C ADAPT

For fitting prices, see page 92-93



Section 8 | Domus Ventilation Support

Let us help you become a BPEC Accredited Ventilation Installer

Our ventilation installer training course provides installers with the opportunity to learn new skills and increase their scope of work.





To book call **03443 715523** or email: **vent.sales@domusventilation.com**

MVHR Commissioning Meter

The CM01 MVHR Commissions Meter is a hand-held digital rotating vane anemometer used for air velocity and volumetric flow measurements.

Simple to use, the CM01 enables the commissioning and performance inspection of all types of ventilation systems, by providing accurate and reliable readings every time.

- Measures velocity and temperature
- Calculates volumetric flow rate
- Supplied with large format flow hood and carry case
- UKAS approved calibration certificate
- Light weight, robust and simple to use Requires 4 x AA batteries (included)

To order a CM01 call 03443 715523

We also offer on-site commissioning services. Ask for more information.



Why you should be qualified:

Domestic ventilation became 'Notifiable Work' on 1st October 2010 as part of the 2010 revision to Approved Document F of the Building Regulations. This means ventilation provision in new homes must be commissioned by a suitably qualified person.

To ensure installers are qualified to complete domestic ventilation installation, commissioning and hand-over, Domus Ventilation wrote and launched the first industry-recognised accredited training program. The content of the course conforms to the requirements of Summit Skills new syllabus for ventilation and is recognised by the Government as a suitable academic qualification for relevant Competent Person Schemes.

The course is accredited by independent training company BPEC, an industry recognised training and certification provider which already provides ACS, OFTEC, ECS and other renewable certification.

The new domestic ventilation course provides significant opportunity for allied trades to take on additional skills and increase their scope of work.

Training course objectives:


The objectives of this training course are to enable delegates to:

- Install and inspect common types of domestic ventilation systems in the UK
- Commission any of the common types of domestic ventilation systems in the UK safely and efficiently

Who the course is applicable to:

- M&E Contractors
- Plumbing & Heating Contractors/Engineers
- Electricians Specialist Wholesaler & Merchant Staff
- Students & ApprenticesBuilding Control



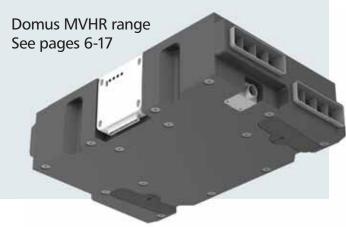

What is covered:

The syllabus covers the majority of existing types of UK domestic ventilation systems and emphasises the most common configurations that most tradespeople are likely to encounter.

Due to time constraints, the syllabus does not aim to cover material that should already be known to plumbing, heating and electrical engineers. Repetition of existing knowledge is only likely to occur in areas which are regarded as critical, including legal and safety issues.

What prerequisite knowledge is needed:

The training/assessment course is targeted at candidates with a number of years' experience in plumbing, heating or electrical engineering and who hold or are studying towards an NVQ Level 3 in plumbing, heating or electrical engineering.

Course duration, content and assessment:

The training and assessment course runs over two days and includes both theoretical training and practical exercises.

At the end of the course there is a multiple choice assessment that each individual candidate needs to pass. The assessment is closed book.

Day 1

- Background and Building Regulations
- Course aims and objectives
- Module 1: Domestic ventilation in context
- Module 2: Air flow requirements and calculations
- Module 3: Health and Safety

Day 2

- Module 4: Installation, inspection, testing, commissioning and provision of information
- Commissioning workshop and assessment
- Examination

Professional development centres

The ventilation installer training course is available at a choice of two locations:

- Aylesford, Kent
- Doncaster, South Yorkshire



Professional development centre, Doncaste

Course availability:

Courses are run on two consecutive days at both training centres regularly throughout the year.

Accommodation:

Accommodation is available locally at preferential rates for course attendees.

Course includes:

- BPEC official certification
- BPEC manual
- All necessary training materials
- Lunch and refreshments both days
- Qualification and van stickers upon successful completion

Payment:

To book, please call our Customer Service team on 03443 715523

Project Notes



104

Project Notes



Glossary

ACH – Air changes per hour. The number of times the volume of air in a room needs to be changed in one hour depending on the activity in that space. Normally given as a range e.g. 15-20 ach; based on the level of usage.

Air Changes – CIBSE Guide B, 2005 recommends extract rates are calculated by multiplying the volume of the room (m³) by the below air changes per hour (ACH). This rate should always be greater than Building Regulations minimum requirements.

Bathrooms 6 - 8	Launderettes 10 -15
Bedrooms 2 - 4	Laundries 10 -15
Billiard Rooms 6 - 8	Lecture Theatres 6 -10
Cafés & Coffee Bars 10 -15	Libraries 3 - 4
Canteens 8 -12	Living Rooms 4 - 6
Cellars 3 -10	Offices 4 - 6
Club Rooms 8 -10	Photo & X-ray Darkrooms 6 - 8
Conference Rooms 6 -10	Public House Bars 6 - 8
Entrance Halls, Corridors 3 -5	Restaurants 10 - 15
Factories & Workshops 6 -10	Shops & Supermarkets 8 - 10
Garages 6 -10	Shower / Bathrooms 15 - 20
Gymnasiums 6	Stores & Warehouses 3 - 6
Hairdressing Salons 10 - 15	Toilets (Public) 5+
Hotel Bars 6 -10	Toilets (Domestic) 6 - 10
Kitchens (Domestic) 10 - 15	Utility Rooms 15 - 20
Laboratories 4 - 15	

Axial Fans are suitable for low pressure applications, where duct runs are short.

Branch – A section of a duct system serving only one or two inlets or outlets.

Centrifugal Fans, also known as radial fans, deliver the pressure needed to propel air through long duct runs

cMEV – Centralised Mechanical Extract Ventilation. See page 11.

CSH – The Code for Sustainable Homes is the national standard for the sustainable design and construction of new homes. The Code aims to reduce our carbon emissions and create homes that are more sustainable. It applies in England, Wales and Northern Ireland.

dB(A)@3m – Decibel, unit of sound measurement based on pressure at 3m away from the source. P17 of the Approved Document F of Building Regulations recommends sound levels for whole house ventilation systems do not exceed 30 dB(A) levels within bedrooms and living rooms.

dMEV – Decentralised Mechanical Extract Ventilation. See page 14.

Duct System Resistance – The total resistance of the duct system can be calculated by simply adding up the resistance of each component at a specific air flow rate. Each product within the Domus range has a measured resistance value for the main UK Building Regulation extract flow rates.

Dwelling Emission Rate (DER) – The estimated annual CO² emissions per square meter due to space heating, water heating, ventilation and internal lighting, minus any CO² emissions saved by the generation of electricity.

Electrical Safety Zones

Section 701 of British Standard 7671:2008 defines four bathrooms and shower room zones:

Zone	Description Voltage	Permitted	Min IP
Zone 0:	The interior of a bath or shower basin	None	None
Zone 1:	Area above Zone 0 up to a height of 2.25m above the floor	Separated extra low voltage (SELV) with transformer located outside Zone 2	None
Zone 2:	Area above Zone 1 up to a height of 2.25m, as well as the area that is horizontally within 0.6m from Zone 1	Any	X4 protection against splashing water from all directions
Outside the Zones:	Includes any space under the bath or shower that can only be accessed with a tool	Any	Any
Fans with hur	midity controls and PIRs should not be locat	ed within splash Zone 1	

EPP - Expanded Polypropylene

EPS – Expanded Polystyrene (Silver).

EST – The Energy Saving Trust (EST) provides independent sustainability recommendations to businesses and individuals. They are accepted by the Government as the authority on many environmental issues.

Extract Rates are given in Table 5.1a and 5.1b of Approved Document F of Building Regulations 2010.

Habitable Rooms – A term used by the Building Regulations to collectively indicate that fresh air is being supplied to bedrooms, living rooms, dining rooms or similar.

Humidistat – A switched control that triggers the appliance once a set level of humidity is reached.

IEE Wiring Regulations – Publication of the Institute of Electrical Engineers. Also known as BS 7671.

Intermittent Extract Fans – Local extract fans are fitted in a dwelling's 'wet rooms' and provide rapid extraction of moisture and other pollutants. They operate intermittently under either occupant or automatic control. See page 16.

IP Rating – Classification of degrees of protection for an electrical product developed by CENELEC. First digit describes degree of protection from solids, the second from liquids. Example: IP44.

I/s – Litres per second - measurement of volume flow.

 $l/s = m3/h \div 3.6$

m³/h - Cubic metres per hour - measurement of volume flow.

 $m^3/h = 1/s \times 3.6$

MEV – A Continuous Mechanical Extract Ventilation continually extracts air from 'wet rooms'. It usually consists of a central ventilation unit (cMEV), positioned in a cupboard or loft space ducted throughout the dwelling to extract air from the wet rooms. Other configurations do exist, including the use of continuously running individual rooms (dMEV).

Mixed Flow Fans combine elements of axial and centrifugal and are therefore appropriate for medium length dust runs

MVHR – Continuous, balanced Mechanical Ventilation with Heat Recovery systems extract stale air from wet rooms and deliver fresh air to habitable rooms. Heat loss associated with the air changes is reduced by a heat recovery mechanism. See page 6.

Pa – Pascal, unit of pressure for measuring system resistance or static pressure.

PIR – Passive infrared sensor, detects movement and is used to trigger appliances

RH – Relative humidity. The ratio of the amount of water in the air at a given temperature.

Outside humidity levels are usually between 60-70%RH

■ The target for indoor levels is normally between 40-60%RH

SAP – The Standard Assessment Procedure (SAP) is the Department of Energy and Climate Change's (DECC) methodology for assessing and comparing the energy and environmental performance of dwellings. Its purpose is to provide accurate and reliable assessments of dwelling energy performances that are needed to underpin energy and environmental policy initiatives.

SELV – Separated Extra Low Voltage, used to describe fans operating at less than 25V.

Specific Fan Power (SFP) – The measurement of power used to drive a fan. Measured in Watts per litre per second (WWs).

SRHRV – Single Room Heat Recovery. See page 10.

Target Emission Rate (TER) – To comply with Part L1A, the dwelling CO² emission rate (DER) must be no greater than a target emission rate based on a notional dwelling of the same size and shape.

Temperature – The common metric measurement of which is Centigrade (or Celsius).

Thermal Overload Protection – A safety component designed to interrupt the current to a motor before the windings exceed their design operating temperature.

Trunk – The section of a duct system carrying the maximum flow of air to or from the appliance

Watts – Measure of electrical power.

Wet Rooms – Refers to rooms with potable water; for example, kitchens, utility rooms (including utility cupboards and drying rooms), WC's or bath/shower rooms from which stale, polluted air is extracted. Hallways and landings are used as conduits for the exchange or transfer of air.

106 www.domusventilation.co.uk

Index

Product Code	Page	Box Qty	List Price	VT Group	Packed*	Product Code	Page	Box Qty	List Price	VT Group	Packed*
	tilation with Heat Red	covery	CC 4 17	L \/T12	Lpp	KIT2S-HPC	52	1	£260.88	SV21 SV21	BB
297 ANC108A	9, 13, 15, 96 21, 53	1	£64.17 £74.89	VT12 SV25	BB BB	KIT2S-HT KIT2S-PC	52 52	1 1	£271.66 £232.85	SV21	BB BB
ANC802A	21, 53	1	£156.99	SV25	BB	KIT2S-RS	52	1	£232.85	SV21	BB
ANC808A ANC812A	21, 53 53	1	£147.29 £87.21	SV25 SV25	BB BB	KIT2S-T KIT3S-RS	52 52	1	£244.27 £271.66	SV21 SV21	BB BB
ANC813A	21	1	£166.69	SV25	BB	MAY102B	51	1	£180.76	SV21	BB
ANC846A ANC848A	21, 53	1	£174.49 £25.67	SV25 SV25	BB BB	MAY202B MAY402B	51 51	1	£223.78 £241.01	SV21 SV21	BB BB
ANC849A	21	1	£33.67	SV25	BB	MAY904A	49, 50	1	£31.27	SV27	BB
ANC850A AQH200-B	21 9	1	£33.67 £1,067.22	SV25 VT12	BB BB	MAY905A MAY905B	49, 50 49	1	£29.07 £31.27	SV27 SV27	BB BB
AQH200E-B	9	1	£1,305.00	VT12	BB	MAY906A	49, 51	1	£94.48	SV27	BB
AQH200E-S AQH200-S	9	1	£1,260.00 £1,018.71	VT12 VT12	BB BB	MAY907A MAYFD	51 51	1	£54.27 £210.24	SV27 SV21	BB BB
AQH240-B	9	1	£1,212.75	VT12	BB	MCC070B	50	1	£145.58	SV21	BB
AQH240E-B	9	1	£1,440.00	VT12	BB	MCC070BLV	50	1	£270.77	SV21	BB
AQH240E-S AQH240-S	9	1	£1,395.00 £1,164.24	VT12 VT12	BB BB	MCC070BLW MIR070B	49 50	1	£189.26 £151.62	SV21 SV21	BB BB
ELE150R	21	1	£83.21	SV25	BB	MPC070B	50	1	£107.41	SV21	BB
HRX2C-AF HRX2-CK1	15, 96 13	1	£45.64 £53.59	VT12 VT12	BB BB	MSS070B MSS070BLV	50	1	£101.07 £138.99	SV21 SV21	BB BB
HRX2D	13, 91, 96, 98, 101	1	£1,506.83	VT12	BB	MTD070BLV	50	1	£145.58	SV21	BB
HRXC-AF	13, 96	1	£24.19	VT12	BB	MTD070BLW	49	1	£147.83	SV21	BB
HRX-CK1 HRXD	13 13, 91, 96, 98, 101	1	£45.86 £1.126.44	VT12 VT12	BB BB	MTS070B MTT070B	50	1	£120.05 £126.36	SV21 SV21	BB BB
RDLAB	92	1	£6.37	VT21A	BB	MTT070BLW	49	1	£164.27	SV21	BB
RDPC75	92	1	£15.67	VT21A	BB	P1	32	1	£28.22	VT04	BB
Mechanical Extr	act Ventilation					P15 S1	36 32	1	£47.38 £26.71	VT04 VT04	BB BB
CMX-ASK1B	21, 96	1	£51.86	SV24	BB	S15	36	1	£42.84	VT04	BB
CMX-ASK1W CMX-S	21, 96 21, 91, 96	1	£51.86 £324.14	SV24 SV24	BB BB	SAPFD SCF100-HPC	46, 47 47	1	£172.04 £110.33	SV21 SV21	BB BB
CIVINES	21, 31, 30		1324.14	3724	DD	SCF100-S	47	1	£58.19	SV21	BB
	lechanical Extract Ver	ntilation	5450.50	0.00		SCF100-T	47	1	£87.11	SV21	BB
DME100C DME100LVC	23	1	£160.60 £176.66	SV30 SV30	BB BB	SDF100B SDF100BLV	30	1	£11.15 £44.86	SV20 SV20	BB BB
				1 -1		SDF100HBPCLV	30	1	£91.51	SV20	BB
Intermittent Ext	ract Fans 33, 36	1	£16.66	VT04	BB	SDF100HTBLV SDF100PB	30	1	£89.82 £16.39	SV20 SV20	BB BB
1K	29, 30, 31, 32, 52	1	£9.73	VT04	BB	SDF100PB SDF100PIR	30	1	£53.03	SV20	BB
1W	32	1	£14.40	VT04	BB	SDF100PIRLV	30	1	£95.21	SV20	BB
CUR7001B CUR7002B	48	1	£47.90 £51.57	SV21 SV21	BB BB	SDF100TB SDF100TBLV	30	1	£14.71 £61.81	SV20 SV20	BB BB
CUR7003B	48	1	£63.38	SV21	BB	SDF150B	34	1	£27.28	SV20	BB
CUR7004B CUR7005B	48 48	1	£88.28	SV21 SV21	BB BB	SDF150BLV	34	1	£85.78 £69.58	SV20	BB BB
CUR9003LV	48	1	£83.20 £108.33	SV21	BB	SDF150HBPC SDF150HTB	34	1	£51.35	SV20 SV20	BB
CUR9004LV	48	1	£138.21	SV21	BB	SDF150PB	34	1	£29.15	SV20	BB
CURFD DVF801D	48	1	£175.05 £15.44	SV21 SV22	BB BB	SDF150PIR SDF150TB	34	1	£51.35 £37.63	SV20 SV20	BB BB
DVF801ET	39	1	£20.83	SV22	BB	SDF150TBLV	34	1	£103.11	SV20	BB
DVF802D	39	1	£20.33	SV22	BB	SDF901WFK	30, 31	1	£13.82	SV20	BB
DVF802ET DVF821ET	39 41	1	£25.72 £66.22	SV22 SV22	BB BB	SDF911WFK SL1	34	1	£16.60 £31.91	SV20 VT04	BB BB
DVF822ET	41	1	£81.70	SV22	BB	SPV801ETLED	40	1	£49.93	SV22	BB
DVF831ET DVF832ET	43	1	£72.57 £78.55	SV22 SV22	BB BB	SPV801TWCG SPV802ETLED	44	1 1	£34.50 £54.83	SV22 SV22	BB BB
FCAK1	82, 95	1	£8.24	VT21A	BB	SPV821ETLED	42	1	£95.33	SV22	BB
GCF100-HPC	46	1	£136.27	SV21	BB	SPV822ETLED	42	1	£110.81	SV22	BB
GCF100-S GCF100-T	46	1	£88.01 £99.82	SV21 SV21	BB BB	SPV831ETLED SPV832ETLED	44	1	£99.52 £105.50	SV22 SV22	BB BB
GCF100LV-HPC	46	1	£147.05	SV21	BB	STF100-H	27	1	£52.40	SV20	BB
GCF100LV-S GCF100LV-T	46 46	1	£98.79 £110.60	SV21 SV21	BB BB	STF100-HPCR STF100-PC	27	1	£60.82 £18.02	SV20 SV20	BB BB
GLD100-T	37	1	£68.19	SV22	BB	STF100-PCR	27	1	£20.02	SV20	BB
GLD100-TK	37	1	£74.52	SV22	BB	STF100-S	27	1	£12.26	SV20	BB
GLD100-TKR GLD100AC-S	37 38	1	£90.45 £23.09	SV22 SV22	BB BB	STF100-SR STF100-T	27	1	£14.25 £16.18	SV20 SV20	BB BB
GLD100AC-SK	38	1	£28.39	SV22	BB	STF100-TR	27	1	£18.19	SV20	BB
GLD100AC-SKR GLD100AC-T	38	1	£30.76 £25.93	SV22 SV22	BB BB	STF100LV-H STF100LV-HPC	27	1	£97.88 £104.31	SV20 SV20	BB BB
GLD100AC-TK	38	1	£31.23	SV22	BB	STF100LV-PC	27	1	£63.50	SV20	BB
GLD100AC-TKR	38	1	£33.58	SV22	BB	STF100LV-S	27	1	£57.74	SV20	BB
GSV100-TKC GSV100-TKCR	37 37	1	£130.00 £132.44	SV22 SV22	BB BB	STF100LV-T SVC100B	27 31	1	£61.66 £27.27	SV20 SV20	BB BB
GSV100-TKW	37	1	£125.25	SV22	BB	SVC100BLV	31	1	£70.46	SV20	BB
GSV100-TKWR GSV100AC-TKCR	37 38	1	£127.71 £59.60	SV22 SV22	BB BB	SVC100HTB SVC100HTBLV	31	1	£56.15 £107.23	SV20 SV20	BB BB
GSV100AC-TKCK		1	£57.47	SV22	BB	SVC100HTBPC	31	1	£59.56	SV20	BB
GTF100-H	26	1	£57.94	SV20	BB	SVC100PB	31	1	£33.67	SV20	BB
GTF100-HPCR	26 26	1	£65.05 £66.74	SV20 SV20	BB BB	SVC100TB SVC100TBLV	31	1	£32.61 £79.64	SV20 SV20	BB BB
GTF100-PC	26	1	£19.93	SV20	BB	SVC150B	35	1	£41.72	SV20	BB
GTF100-PCR	26	1	£21.64	SV20	BB	SVC150PB	35	1	£44.86	SV20	BB
GTF100-S GTF100-SR	26 26	1	£13.56 £15.25	SV20 SV20	BB BB	SVC901WFK T1	35 32	1	£29.13 £34.35	SV20 VT04	BB BB
GTF100-T	26	1	£17.89	SV20	BB	T15	36	1	£60.90	VT04	BB
GTF100-TR	26	1	£19.59	SV20	BB	TFF100-CF1BM	29, 82	1	£11.98	SV20	BB
GTF100LV-H GTF100LV-HPC	26 26	1	£96.60 £103.70	SV20 SV20	BB BB	TFF100-CF1S TFF100-DT1S	29, 82	1	£11.98 £11.98	SV20 SV20	BB BB
GTF100LV-PC	26	1	£58.59	SV20	BB	TFF100-DT1W	29, 82	1	£7.55	SV20	BB
GTF100LV-S GTF100LV-T	26 26	1	£52.22 £56.55	SV20 SV20	BB BB	VH VIT100B	32 43	1	£95.72 £62.87	VT04 SV22	BB BB
GTF100LV-1	33	1	£56.55 £63.56	SV20 SV20	BB	VIT100B VIT100TB	43	1	£62.87	SV22 SV22	BB
	33	1	£48.31	SV20	BB	VIT150B	45	1	£98.97	SV22	BB
GTF150-PC			0.000								
GTF150-S	33	1	£40.23	SV20 SV20	BB BB	VIT150TB VIT150TB	45	1	£126.43	SV22 SV22	BB BB
			£40.23 £43.65 £56.75 £88.86	SV20 SV20 VT04 VT04	BB BB BB	VIT150TB VIT150TB VS VT	45 45 32 32	1 1	£126.43 £113.97 £66.45 £69.96	SV22 SV22 VT04 VT04	BB BB BB

Index

Product Code	Page	Box Qty	List Price	VT Group	Packed*	Product Code	Page	Box Qty	List Price	VT Group	Packed*
						5136	67	1	£4.86	VT06	BB
Rigid Duct Syste 18	74, 94	10	£3.32	VT03E	RT	6136 51310	67 67	1	£5.88 £7.37	VT06 VT06	BB BB
119	74	10	£2.99	VT03C	RT	4411	72, 95	1	£182.12	VT01B	BB
20 23	74 73	1	£2.21 £11.11	VT03G VT03C	RT BB	5210 5305	67 59	1	£132.99 £5.64	VT06 VT06	BB BB
133	59	1	£14.40	VT06	BB	5615	67	1	£57.18	VT06	BB
861 863	67 67	1	£2.88 £4.94	VT06 VT06	RT RT	5697 6210	65 67	3	£38.85 £150.76	VT03C VT06	BB BB
366	67	1	£9.57	VT06	BB	6615	67	1	£69.11	VT06	BB
880	68 58	10	£2.12	VT03A VT02A	BB BB	9305 40205	59 80	1	£6.88 £17.83	VT18A VT05	BB
381 140	76	10	£1.61 £10.11	VT02A VT02B	BB	40492	64	1	£17.83	VT03A	BB BB
141	76	10	£12.25	VT02B	BB	50592	64	1	£20.60	VT03A	BB
190 191	64 64	5 10	£7.32 £6.35	VT03A VT03A	RT RT	403203 403215	68 68	1	£3.85 £10.35	VT06 VT06	BB BB
192	64	4	£14.23	VT03A	BB	403230	68	1	£18.75	VT06	BB
193 194	64 64	10 10	£4.03 £6.42	VT03A VT03A	RT RT	503203 503215	68 68	1	£5.07 £13.90	VT06 VT06	BB BB
195	64	10	£7.64	VT03A	BB	503230	68	1	£23.61	VT06	BB
196	65	10	£2.26	VT03A	RT	603203	68	1	£5.49	VT06	BB
197 199	65 65	7	£12.72 £17.08	VT03A VT03A	RT BB	603215 603230	68 68	1	£18.39 £30.03	VT06 VT06	BB BB
510	56	5	£12.44	VT02C	RT	40AFP	69, 77	Pack of 2	£15.17	VT03A	BB
515	56	5	£18.65	VT02C	BB	10TP12	66	1	£17.19	VT03G	BB
518 519	57 74	1 1	£3.59 £2.81	VT02B VT03C	BB BB	1100-4 1100-5	64 64	3	£10.01 £12.25	VT03B VT03D	RT RTRT
520	56	10	£7.32	VT02B	RT	1100-6	64	2	£15.23	VT03F	BB
522 527	57 56	20* 8	£1.13 £9.23	VT02B VT02B	RT BB	114-4 114-5	65 65	10	£2.61 £2.46	VT03A VT03C	RT BB
533	59	1	£24.75	VT06	BB	114-6	65	10	£3.04	VT03E	BB
540	59, 76	10	£10.11	VT02B	BB	115-4	57	10	£1.82	VT02A	RT
541 544	76 74	10	£12.25 £2.77	VT02B VT02B	RT BB	115-5B 115-5C	57 57	10	£2.55 £2.81	VT02B VT02B	BB BB
545	56	10	£15.23	VT02B	BB	115-5T	57	10	£2.55	VT02B	BB
550	56	10	£15.23	VT02B	RT	115-5W	57	10	£2.55	VT02B	BB
555 560	56 57	10	£13.69 £11.15	VT02B VT02B	RT RT	115-6 1200-4	57 64	10	£2.74 £17.63	VT18A VT03B	BB BB
561	67, 94	1	£3.98	VT06	RT	1200-5	64	3	£21.75	VT03D	BB
563 566	67 67	1	£11.18 £21.94	VT06 VT06	RT BB	1200-6 122-4	64 57	10	£27.23 £1.42	VT03F VT02A	BB RT
570	75	10	£12.25	VT02B	RT	123-4	73	10	£3.21	VT03C	BB
75	57	10	£9.99	VT02B	RT	124-4	67	10	£1.76	VT03A	RT
580 581	68 58	10	£2.54 £3.65	VT03C VT02B	BB BB	125-4 125-5	68 68, 94	1	£1.76 £2.46	VT03A VT03C	RT RT
582	56	6	£21.53	VT02B	RT	125-6	68	1	£3.36	VT03E	BB
590 591	64 64	10	£12.25 £10.11	VT03C VT03C	RT RT	125-UNI 126-4	68 67	10	£4.03 £1.83	VT03E VT03A	BB RT
592	64	5	£16.53	VT03C	BB	126-5	67	10	£2.46	VT03C	RT
593	64, 94	10	£4.62	VT03C	RT	126-6	67	10	£3.36	VT03E	BB
594 595	64 64	10	£7.47 £10.65	VT03C VT03C	RT BB	127-4 127-5	68 68	1	£1.66 £2.72	VT03A VT03C	RT RT
596	65	10	£2.46	VT03C	RT	127-6	68	1	£3.21	VT03E	BB
519	74 74	10	£3.59	VT03E	BB BB	130-4	64	10	£14.12	VT03B	BB BB
520 540	76	10	£28.23 £10.11	VT03E VT02B	BB	130-5 130-6	64 64	10	£19.40 £23.44	VT03D VT03F	BB
541	76	8	£12.25	VT02B	BB	135-4	64	10	£5.41	VT03B	RT
644 661	74 67	10	£3.32 £4.76	VT02B VT06	BB BB	135-5 135-6	64 64	10	£6.92 £9.81	VT03D VT03F	RT BB
563	67	1	£10.52	VT06	BB	136-04	69	8	£10.70	VT01A	BB
566	67	10	£24.86	VT06	BB	136-05	69	8	£12.88	VT01B	BB
580 590	68 64	6	£2.77 £15.23	VT03E VT03E	BB BB	136-06 136-24	69 69	8	£17.19 £17.19	VT01B VT01A	BB RT
591	64	10	£28.50	VT03E	BB	136-25	69	6	£19.36	VT01B	RT
592 593	64 64, 94	10	£31.93 £5.64	VT03E VT03E	BB BB	136-26 136FR-24M	69, 95 69	6	£25.75 £108.25	VT01B VT01A	BB BB
594	64	10	£8.81	VT03E	BB	136FR-25M	69	1	£111.38	VT01B	BB
595	64	10	£10.63	VT03E	BB	136FR-26M	69	1	£152.34	VT01B	BB
596 319	65 74	10	£2.68 £3.82	VT03E VT03G	BB BB	202-5B 202-5W	80	1	£26.63	VT05 VT05	BB BB
910	56	3	£19.93	VT18B	BB	202-6B	80	1	£30.91	VT05	BB
915	56 56	6	£29.95 £8.40	VT18B VT18A	BB BB	202-6W 202B	80	1	£30.91 £17.95	VT05 VT05	BB BB
922	57	10*	£1.28	VT18A	BB	202W	80	1	£17.95	VT05	RT
927	56	6	£10.60	VT18A	BB	207W	80	1	£22.98	VT05	RT
933 941	59 76	6	£24.62 £14.53	VT18A VT18A	BB BB	2100-4 2100-5	64 64	3	£11.22 £13.87	VT03B VT03D	BB BB
950	56	6	£17.53	VT18A	BB	2100-6	64	2	£16.89	VT03F	BB
951 954	76 75, 94	6	£14.53 £64.31	VT18A VT02B	BB BB	212B 212W	78 78	1	£43.37 £43.37	VT05 VT05	BB BB
955	75, 94 56	6	£15.77	VT18A	BB	214B	78	1	£43.37 £47.59	VT05	BB
157	61	10	£5.92	VT18A	BB	227B	78	1	£79.65	VT05	BB
957 958	75 75	10	£5.92 £11.58	VT18A VT18A	BB BB	227W 2404B	78 77	1	£79.65 £65.13	VT05 VT05	BB BB
960	57	6	£13.93	VT18A	BB	2404C	77	1	£71.70	VT05	BB
961	59, 76	6	£14.53	VT18A	BB	2404T	77	1	£65.13	VT05	BB
970 975	75, 94 57	6	£14.93 £12.55	VT18A VT18A	BB BB	2404W 240W	77 80	1	£65.13 £18.98	VT05 VT05	BB BB
977	61, 75	10	£5.92	VT18A	BB	2447B	81	1	£22.98	VT05	BB
981	59	1	£6.97	VT18A	BB	2447T	81	1	£22.98	VT05	BB
982 3305	56 59	6	£27.51 £4.92	VT18A VT06	BB RT	2447W 2647B	81	1	£22.98 £30.52	VT05 VT05	BB BB
3615	67	1	£40.68	VT06	BB	2647W	81	1	£30.52	VT05	BB
3645	67	1	£76.99	VT06	BB	2653B	78	1	£124.06	VT18A	BB
1210 3133	67 67	1	£62.63 £1.95	VT06 VT06	BB BB	2653W 2655W	78 78	1	£124.06 £127.29	VT18A VT05	BB BB
133	67	1	£2.42	VT06	BB	40AF	69, 77	Pack of 2	£15.17	VT03A	BB
5133	67 67	1	£2.95 £3.92	VT06 VT06	BB BB	4804B 4804W	72 72	20	£2.12 £2.12	VT01A VT01A	RT RT



Product Code	Page	Box Qty	List Price	VT Group	Packed*
4900B	70	20	£3.13	VT01A	RT
4900BK	70	20	£3.03	VT01A	RT
4900C	70	20	£3.44	VT01A	BB
4900T	70	20	£3.13	VT01A	BB
4900W	70	20	£3.13	VT01A	RT RT
4901B 4901C	62 62	20	£4.12 £4.93	VT01A VT01A	BB
4901T	62	20	£4.47	VT01A	RT
4901W	62	20	£4.12	VT01A	RT
4902B	71	10	£5.83	VT01A	RT
4902BK	71	10	£5.67	VT01A	RT
4902C 4902T	71 71	10	£6.87 £5.83	VT01A	BB BB
4902W	71	10	£5.83	VT01A VT01A	RT
4903B	62	8	£6.02	VT01A	RT
4903W	62	8	£6.02	VT01A	RT
4904B	71	20	£2.98	VT01A	BB
4904BK	71	20	£4.72	VT01A	RT
4904C	71	20	£3.28	VT01A	BB
4904T 4904W	71	20	£2.98 £2.98	VT01A VT01A	BB BB
4904VV 4905B	62	20	£5.34	VT01A	BB
4905C	62	20	£5.86	VT01A	BB
4905T	62	20	£5.34	VT01A	BB
4905W	62	20	£4.93	VT01A	BB
4907CH	69	1	£18.42	VT01A	BB
4907W 4908F	69 69	1 1	£5.37	VT01A	BB BB
4908F 501B	69	20	£44.06 £6.21	VT01A VT01B	BB
501C	60	20	£6.83	VT01B	BB
501T	60	20	£6.21	VT01B	BB
501W	60	20	£6.21	VT01B	BB
505BK	60	20	£7.22	VT01B	BB
505C	60	20	£7.96	VT01B	BB
505T 505W	60	20	£7.22	VT01B VT01B	BB BB
508W	77	1	£23.68	VT05	BB
50TP45	73	1	£21.76	VT03C	BB
540-FC	59	10	£43.73	VT02D	BB
55015B	61	1	£10.95	VT01A	BB
55015W	61	1	£10.95	VT01A	BB
550-GL 5900B	56, 83 70	10	£32.67 £9.23	VT02D	BB RT
5900B 5900C	70	10	£10.17	VT01A VT01A	BB
5900T	70	10	£9.23	VT01A	BB
5900W	70	10	£9.23	VT01A	RT
5902B	71	8	£11.73	VT01A	RT
5902C	71	8	£12.91	VT01A	BB
5902T 5902W	71	8	£11.73 £11.73	VT01A VT01A	BB RT
5902VV 5904B	71	10	£9.23	VT01A	BB
5904C	71	10	£10.17	VT01A	BB
5904T	71	10	£9.23	VT01A	BB
5904W	71	10	£9.23	VT01A	BB
5907W	95	1	£9.01	VT01A	BB
599M 5B303	65 56	1	£20.51 £21.39	VT03C VT02B	BB BB
5SL-500	58, 85	1	£97.68	VT02D	BB
6900B	70	10	£8.18	VT01A	BB
6900C	70	10	£9.01	VT01A	BB
6900T	70	10	£8.18	VT01A	BB
6900W	70	10	£8.18	VT01A	BB
6902B	71	8	£13.02	VT01A	BB BB
6902C 6902T	71	8	£14.33 £13.02	VT01A VT01A	BB
6902W	71	8	£13.02	VT01A	BB
6904B	71	10	£8.18	VT01A	BB
6904C	71	10	£9.78	VT01A	BB
6904T	71	10	£8.18	VT01A	BB
6904W 699M	71 65	10	£8.18 £33.58	VT01A VT03E	BB BB
905B	61, 95	10	£11.90	VT01B	RT
905C	61, 95	10	£13.10	VT01B	RT
905T	61, 95	10	£11.90	VT01B	RT
905W	61, 95	10	£11.90	VT01B	RT
950-GL	56, 85	6	£37.27	VT02D	BB
9SL-500	58 95	1	£154.87	VT02D	BB BB
ART125-CD1W ART125-CF1BM	69, 94	1	£12.75 £18.30	VT21A VT21A	BB
ART125-CF18VI	69, 94	1	£18.30	VT21A	BB
ART125-CF1W	69, 94	1	£12.75	VT21A	BB
ART125-DT1S	69, 94	1	£18.30	VT21A	BB
ART125-DT1W	69, 94	1	£12.75	VT21A	BB
ART125-SD1W	95	1	£12.75	VT21A	BB
ART125-SD2W D1-2000	95 56	10	£12.75 £12.04	VT21A VT02A	BB BB
D3-2000	56	5	£12.04 £24.84	VT02A VT02C	BB
D4-2000	56	3	£40.26	VT18B	BB
DD010	56	10	£6.02	VT02A	RT
DD015	56	10	£9.04	VT02A	BB
DD018	57	1	£2.92	VT02A	BB
DD019	74	10	£7.04	VT03A	BB
DD030	56	20	£2.24 £3.37	VT02A VT02A	RT BB
DD020	156		1 13.37	VIUZA	טט
DD027	56 76			VT02A	RT
	56 76 59	20	£5.52 £5.52	VT02A VT02A	RT BB
DD027 DD030	76	20	£5.52		

Product Code	Page	Box Qty	List Price	VT Group	Packed
DD070	75	20	£5.92	VT02A	RT
DD071	74	20	£3.51	VT02A	RT
DD073	75	5	£5.92	VT02A	BB
DD075	57	20	£4.97	VT02A	RT
DD077	60	20	£3.93	VT02A	RT
DD080	56	20	£7.86	VT02A	RT
DDSEAL DFS110	73, 95 59	1	£11.15 £7.48	VT02B VT22	BB BB
DFS125	66, 89	1	£21.89	VT22	BB
DFS204	59, 89	1	£12.74	VT22	BB
DFS220	59, 89	1	£19.46	VT22	BB
DFSV125	66, 89	1	£12.29	VT22	BB
DFSV150	66, 89	1	£17.70	VT22	BB
4804B	72	20	£2.51	VT01A	BB
4804W	72	20	£2.51	VT01A	RT
4904B	72	20	£5.33	VT01A	RT
4904C	72	20	£5.85	VT01A	BB
4904T 4904W	72 72	20	£5.33 £5.33	VT01A VT01A	BB RT
4905B	63	20	£5.64	VT01A	RT
4905C	63	20	£6.20	VT01A	BB
4905W	63	20	£5.64	VT01A	RT
5904B	72	10	£10.01	VT01A	RT
5904C	72	10	£11.03	VT01A	BB
5904T	72	10	£10.01	VT01A	BB
5904W	72	10	£10.01	VT01A	RT
6904B	72	10	£11.43	VT01A	BB
6904C	72	10	£12.58	VT01A	BB
6904T	72	10	£11.43	VT01A	BB
6904W	72	10	£11.43	VT01A	BB
BS100H	66	1	£30.66	VT14	BB
BS125H	66	1	£43.07	VT14	BB
BS150H	66 59	1	£71.12	VT14 VT14	BB BB
BS20460H BS22090H	59	1	£26.46 £43.87	V114 VT14	BB
RDOP-125	94	1	£24.34	VT21A	BB
RDOP-125FC	94	1	£34.19	VT21A	BB
S1100-4	66	4	£5.64	VT15	BB
S1100-5	66	4	£7.23	VT15	BB
S1100-6	66	4	£7.80	VT15	BB
S22	59, 66	1	£18.08	VT15	BB
S490	66	3	£4.15	VT15	BB
S491	66	3	£3.95	VT15	BB
S492	66	3	£4.93	VT15	BB
S510	58	4	£7.23	VT15	BB
S540	58	3	£4.54	VT15	BB
S550	58	3	£4.55	VT15	BB
S555	58	3 4	£3.64 £2.93	VT15	BB
S575 S582	58 58	3	£6.67	VT15 VT15	BB BB
S590	66	3	£4.55	VT15	BB
S591	66	3	£3.64	VT15	BB
S592	66	3	£6.67	VT15	BB
S690	66	3	£5.66	VT15	BB
S691	66	3	£4.75	VT15	BB
S692	66	3	£13.11	VT15	BB
S910	58	4	£9.41	VT15	BB
S950	58	3	£5.91	VT15	BB
S955	58	3	£4.72	VT15	BB
S961	58	3	£5.90	VT15	BB
S975	58	4	£3.81	VT15	BB
S982	58	3	£8.69	VT15	BB
Radial Systems	101	1	£3E1.00	5)/24	DD
IMXR-S RDA-3FA	101 92, 101	1	£351.09 £15.87	SV24 VT21A	BB BB
RDA-3FC	92, 101	1	£15.87	VT21A	BB
RDA-3FH90	92, 101	1	£18.34	VT21A	BB
DA-3FV90	92, 101	1	£15.59	VT21A	BB
DA-3R90-125	93, 101	1	£20.50	VT21A	BB
DA-3R90-150	93 101	1	£20.50	VT21A	BB
DA-3T	93, 101	1	£19.66	VT21A	BB
DA-6T	93, 101	1	£31.78	VT21A	BB
DA-6TB	101	1	£31.78	VT21A	BB
DA-CSK3	93, 101	1	£6.99	VT21A	BB
DA-CSK6	93, 101	1	£13.34	VT21A	BB
DA-FSK	93, 101	1	£50.77	VT21A	BB
DCLIP75	92	1	£10.31	VT21A	BB BB
DD125 DD12590	93	1	£38.80 £33.95	VT21A VT21A	BB
DD12590	93	1	£56.98	VT21A	BB
DD15090	93	1	£33.95	VT21A	BB
DD75	92	1	£218.25	VT21A	BB
DD75(25)	92	1	£181.86	VT21A	BB
RDFS75	93	1	£23.85	VT21A	BB
RDI-25X5M	93	1	£22.19	VT21A	BB
RDK-CMXS	99	1	£1,511.19	VT21B	HP
RDK-CMXS-AR	99	1	£1,511.19	VT21B	HP
RDK-HRX2D	98	1	£3,635.21	VT21B	HP
RDK-HRX2D-AR	98	1	£3,635.21	VT21B	HP
RDK-HRXD	98	1	£3,230.06	VT21B	HP
DK-HRXD-AR	98	1	£3,230.06	VT21B	HP
DM-EP150	92	1	£213.93	VT21A	BB
DM-MD220	92 98, 99	1	£213.93	VT21A	BB
		1 1	£42.44	VT21B	BB
RDRE1 RDSE1	98, 99	1	£545.60	VT21B	BB

Terms and Conditions

General Training Information

For our distribution customer base.

Pack Quantities

There are recommended pack quantities listed on pages 107-109, however due to the nature of some products, the only items which must be bought in pack multiples are pipes, clips and rigid duct thermal insulation.

Site Deliveries

We will require logistical information before attempting to deliver to all project sites. Your urgent attention to these requests will ensure that we can deliver to the agreed date.

Carriers

We can offer a 48-hour carrier facility to cater for your urgent order requests, however a scaled charge will apply for this facility. Details are available upon request, by calling 03443 715523.

Claims for Damages and Shortages

Please submit any claims within 3 working days to vent.sales@domusventilation.com

To request a proof of delivery please call 03443 715523.

Return of Product

We do not accept any return of product surplus to requirements, unless previously agreed in writing.

Trading Terms and Conditions

Please go to: www.polypipe.com/trading-terms-conditions

110 www.domusventilation.co.uk





VENTILATION GUIDE 2017

Domus Ventilation Cambria House Caerphilly Business Park Van Road Caerphilly CF83 3ED

UK tel: 03443 715523 UK fax: 03443 715524

Email: vent.sales@domusventilation.com Web: www.domusventilation.co.uk

